

305-CD-610-003

## **EOSDIS Core System Project**

# **Release 6B Segment/Design Specification for the ECS Project**

August 2003

Raytheon Company  
Upper Marlboro, Maryland

# Release 6B Segment/Design Specification for the ECS Project

August 2003

Prepared Under Contract NAS5-60000  
CDRL Item #046

## RESPONSIBLE ENGINEER

<u>Alton Davis /s/</u>	<u>8/7/03</u>
Alton Davis, Systems Engineer EOSDIS Core System Project	Date

## SUBMITTED BY

<u>Art Cohen /s/</u>	<u>8/7/03</u>
Art Cohen, Director of Development EOSDIS Core System Project	Date

Raytheon Company  
Upper Marlboro, Maryland

This page intentionally left blank.

# Preface

---

This document is a contract deliverable with an approval code 2. As such, it does not require formal Government acceptance. Contractor approved changes to this document are handled in accordance with change control requirements described in the ECS Configuration Management Plan. Changes to this document are made by Document Change Notice (DCN) or by complete revision. The ECS Development Facility/Science Development Configuration Control Board has reviewed it, and this final version is being delivered for Release 6B to the Government for review and comment.

Any questions or proposed changes can be addressed to:

Data Management Office  
The ECS Project Office  
Raytheon Company  
1616 McCormick Drive  
Upper Marlboro, MD 20774-5301

This page intentionally left blank.

# Abstract

---

The Release 6B Segment/Design Specification is an overview description of the ECS Project. The functionality of the ECS software is described at the Subsystem, Computer Software Configuration Item (CSCI), Computer Software Component (CSC), and Process levels. Architecture and context diagrams illustrate the process interconnections within the ECS CSCIs and the external connections to other CSCIs, subsystems, and specified segment interfaces. Interface event description tables describe the data, messages, notifications, or status information that occurs at each level of functionality within the ECS. A basic description of the Commercial Off The Shelf (COTS) software and hardware used in ECS is included. Also, a more detailed class level of documentation is offered from the output of the on-line documentation tool ABC++.

The high-level design in this document is the level of information derived from requirement sources, and used by the development team to complete the ECS design implementation for a software system at a 6B state of maturity.

**Keywords:** Release 6B, Overview, SDPS, CSMS, Design, Detailed Design, Subsystem, Architecture, Software, Hardware, Object Oriented, Security, Gateway, System Management, Reports, User Interface and GUI.

This page intentionally left blank.

# Change Information Page

<b>List of Effective Pages</b>			
<b>Page Number</b>	<b>Issue</b>		
Title	Final		
iii through xxvi	Final		
1-1 and 1-2	Final		
2-1 through 2-24	Final		
3-1 through 3-20	Final		
4-1 through 4-644	Final		
5-1 through 5-4	Final		
A-1 through A-252	Final		
B-1 through B-96	Final		
C-1 through C-44	Final		
D-1 through D-34	Final		
AB-1 through AB-14	Final		
<b>Document History</b>			
<b>Document Number</b>	<b>Status/Issue</b>	<b>Publication Date</b>	<b>CCR Number</b>
305-CD-610-001	Draft	August 2000	
305-CD-610-002	Final	August 2002	02-0669
305-CD-610-003	Final	August 2003	03-0535

This page intentionally left blank.

# Contents

---

## 1. Introduction

1.1	Purpose and Scope.....	1-1
1.2	Document Organization .....	1-2

## 2. Related Documentation

2.1	Parent Documents.....	2-1
2.2	Applicable Documents .....	2-1
2.2.1	Other Related Documents and Documentation .....	2-16
2.3	Information Documents Not Referenced.....	2-17
2.4	ECS Tool Descriptions.....	2-18
2.4.1	Discover.....	2-18
2.4.2	ABC++ .....	2-19
2.4.3	Rational Rose .....	2-20
2.4.4	Clearcase Baseline Manager Configuration Management Tool.....	2-21

## 3. System Description

3.1	Mission and Release 6B Objectives .....	3-1
3.1.1	Release 6B Capabilities.....	3-1
3.2	Release 6B Architecture Overview .....	3-10
3.2.1	Release 6B Context Description.....	3-14
3.2.2	Release 6B Architecture .....	3-16

## 4. Subsystem Description

4.1	Data Server Subsystem Overview .....	4-32
4.1.1	Science Data Server Software Description.....	4-46
4.1.2	Data Distribution Software Description .....	4-85

4.1.2.1	Data Distribution Functional Overview .....	4-85
4.1.2.2	Data Distribution Context .....	4-85
4.1.2.3	Data Distribution Architecture .....	4-89
4.1.2.4	Data Distribution Process Descriptions.....	4-91
4.1.2.5	Data Distribution Process Interface Descriptions.....	4-92
4.1.2.6	Data Distribution Data Stores.....	4-99
4.1.3	Storage Management Software Description.....	4-100
4.1.3.1	Storage Management Functional Overview .....	4-100
4.1.3.2	Storage Management Context .....	4-101
4.1.3.3	Storage Management Architecture .....	4-105
4.1.3.4	Storage Management Process Descriptions .....	4-112
4.1.3.5	Storage Management Process Interface Descriptions .....	4-114
4.1.3.6	Storage Management Data Stores .....	4-132
4.1.4	Data Server Subsystem Hardware .....	4-136
4.1.4.1	Access Control and Management Hardware CI Description .....	4-136
4.1.4.2	Data Repositories Hardware CI Description .....	4-137
4.1.4.3	Working Storage Hardware CI Description .....	4-138
4.1.4.4	Distribution and Ingest Peripheral Management Hardware CI Description.....	4-138
4.2	Ingest Subsystem Overview .....	4-139
4.2.1	INGST Computer Software Configuration Item Description .....	4-144
4.2.1.1	INGST Functional Overview .....	4-145
4.2.1.2	INGST Context .....	4-146
4.2.1.3	INGST Architecture .....	4-151
4.2.1.4	INGST Process Interface Descriptions.....	4-154
4.2.1.5	INGST Data Stores.....	4-164
4.2.2	Ingest Subsystem Hardware .....	4-165
4.2.2.1	Ingest Client Hardware CI Description .....	4-165
4.2.2.2	Ingest Workstation Description.....	4-166
4.3	Client Subsystem Overview .....	4-167
4.3.1	Workbench Computer Software Configuration Item Description.....	4-174
4.3.1.1	Workbench Functional Overview .....	4-174
4.3.1.2	Workbench Context.....	4-175
4.3.1.3	Workbench Architecture .....	4-178
4.3.1.4	Workbench Process Descriptions.....	4-179
4.3.1.5	Workbench Process Interface Descriptions.....	4-180
4.3.1.6	Workbench Data Stores.....	4-188
4.3.2	ODFRM Software Description.....	4-188
4.3.2.1	ODFRM Functional Overview.....	4-188
4.3.2.2	ODFRM Context.....	4-189
4.3.2.3	ODFRM Architecture.....	4-191
4.3.2.4	ODFRM Process Description.....	4-192
4.3.2.5	ODFRM Interface Descriptions .....	4-193

4.3.2.6	ODFRM Data Stores .....	4-200
4.3.3	Desktop Software Description.....	4-200
4.3.3.1	Desktop Functional Overview .....	4-200
4.3.3.2	Desktop Context .....	4-200
4.3.3.3	Desktop Architecture.....	4-203
4.3.3.4	Desktop Process Description.....	4-203
4.3.3.5	Desktop Process Interface Descriptions .....	4-204
4.3.3.6	Desktop Data Stores .....	4-207
4.4	Data Management Subsystem Overview .....	4-208
4.4.1	Data Dictionary Software Description .....	4-216
4.4.1.1	Data Dictionary Functional Overview .....	4-216
4.4.1.2	Data Dictionary Context.....	4-216
4.4.1.3	Data Dictionary Architecture .....	4-219
4.4.1.4	Data Dictionary Process Descriptions .....	4-220
4.4.1.5	Data Dictionary Process Interface Descriptions.....	4-220
4.4.1.6	Data Dictionary CSCI Data Stores.....	4-226
4.4.2	V0 Gateway Software Description.....	4-226
4.4.2.1	V0 Gateway Functional Overview .....	4-226
4.4.2.2	V0 Gateway Context .....	4-227
4.4.2.3	V0 Gateway Architecture .....	4-233
4.4.2.4	V0 Gateway Process Descriptions .....	4-236
4.4.2.5	V0 Gateway Process Interface Descriptions .....	4-237
4.4.2.6	V0 Gateway Data Stores .....	4-247
4.4.3	Data Management Subsystem Hardware.....	4-247
4.4.3.1	Data Management Hardware CI (DMGHW) Description.....	4-247
4.4.3.2	Interface Hardware CI (INTHW) Description, as used by the Data Management Subsystem.....	4-248
4.5	Order Manager Subsystem Overview .....	4-249
4.5.1	Order Manager Subsystem Software Description .....	4-251
4.5.1.1	Order Manager Server CSCI Functional Overview .....	4-251
4.5.1.2	Order Manager Server CSCI Context .....	4-251
4.5.1.3	Order Manager Server CSCI Architecture .....	4-253
4.5.1.4	Order Manager Server CSCI Process Description .....	4-254
4.5.1.5	Order Manager Server CSCS Interface Description .....	4-255
4.5.1.6	Data Stores .....	4-256
4.5.1.7	Order Manager Hardware.....	4-257
4.6	Planning Subsystem Overview.....	4-258
4.6.1	Production Planning (PLANG) Software Description .....	4-263
4.6.1.1	Production Planning Functional Overview .....	4-263
4.6.1.2	Production Planning Context .....	4-263
4.6.1.3	Production Planning Architecture .....	4-268
4.6.1.4	Production Planning Process Descriptions.....	4-270

4.6.1.5	Production Planning Process Interface Descriptions.....	4-272
4.6.1.6	Production Planning Data Stores.....	4-291
4.6.2	Planning Subsystem Hardware Components .....	4-292
4.6.2.1	Planning Hardware CI (PLNHW) Description.....	4-292
4.6.2.2	Planning Workstation Description .....	4-292
4.7	Data Processing Subsystem Overview .....	4-294
	TOOLKIT Error/Status Reporting (SMF Tools).....	4-302
4.7.1	Processing Software Description.....	4-308
4.7.1.1	Processing Functional Overview.....	4-308
4.7.1.2	Processing Context.....	4-308
4.7.1.3	Processing Architecture.....	4-313
4.7.1.4	Processing Process Descriptions .....	4-316
4.7.1.5	Processing Process Interface Descriptions .....	4-322
4.7.1.6	Processing Data Stores .....	4-334
4.7.2	Algorithm Integration and Test Tools Software Description.....	4-335
4.7.2.1	Functional Overview .....	4-335
4.7.2.2	Algorithm Integration and Test Tools Context .....	4-336
4.7.2.3	Algorithm Integration and Test Tools Architecture .....	4-338
4.7.2.4	Algorithm and Test Tools Process Description.....	4-339
4.7.2.5	Algorithm and Test Tools Process Interface Descriptions .....	4-340
4.7.2.6	Algorithm and Test Tools Data Stores .....	4-348
4.7.3	Data Processing Hardware Components .....	4-348
4.7.3.1	Science Processor Hardware CI (SPRHW) Description .....	4-348
4.7.3.2	Algorithm Quality Assurance Hardware CI Description .....	4-350
4.7.3.3	Algorithm Integration and Test Hardware CI Description.....	4-351
4.8	Communications Subsystem Overview .....	4-353
4.8.1	The Distributed Computing Configuration Item Software Description.....	4-363
4.8.1.1	Subscription Server Computer Software Component Description.....	4-369
4.8.1.2	ASTER DAR Gateway Server Software Description .....	4-380
4.8.1.3	E-mail Parser Gateway Server Software Description .....	4-388
4.8.1.4	MOJO Gateway Server Computer Software Component Software Description .....	4-396
4.8.1.5	Configuration Registry Server Software Description .....	4-408
4.8.1.6	Machine-to-Machine Gateway Server Software Description.....	4-418
4.8.1.7	CCS Middleware Support Group Description.....	4-429
4.8.1.8	Remote File Access Group - File Transfer Protocol Description.....	4-434
4.8.1.9	Remote File Access Group - File Transfer Protocol Notification.....	4-437
4.8.1.10	Remote File Access Group - Bulk Data Server Description .....	4-440
4.8.1.11	Remote File Access Group - Network File System Description.....	4-444
4.8.1.12	Remote File Access Group - Filecopy Description.....	4-448
4.8.1.13	Mail Support Group Description.....	4-451
4.8.1.14	Virtual Terminal Description .....	4-454
4.8.1.15	Cryptographic Management Interface Software Description.....	4-457

4.8.1.16	Domain Name Server Software Description .....	4-461
4.8.1.17	Infrastructure Libraries Group Description .....	4-464
4.8.2	The Distributed Computing Configuration Item Context .....	4-471
4.8.3	Distributed Computing Configuration Item Architecture .....	4-481
4.8.4	Distributed Computing Configuration Item Process Descriptions.....	4-483
4.8.5	Distributed Computing Configuration Item Process Interface Descriptions.....	4-483
4.8.6	Distributed Computing Configuration Item Data Stores.....	4-484
4.8.7	Communications Subsystem Hardware CI Description.....	4-484
4.9	System Management Subsystem Overview .....	4-486
4.9.1	Management Software Computer Software Configuration Item Description..	4-495
4.9.1.1	Management Software Functional Description .....	4-495
4.9.1.2	Management Software Context .....	4-553
4.9.1.3	Management Software Architecture.....	4-556
4.9.1.4	Management Software Process Descriptions .....	4-558
4.9.1.5	Management Software Process Interface Descriptions .....	4-559
4.9.1.6	Management Software Data Stores .....	4-566
4.9.2	Management Logistics Computer Software Configuration Item Description..	4-566
4.9.2.1	Management Logistics Functional Overview.....	4-566
4.9.2.2	Management Logistics Context.....	4-577
4.9.2.3	Management Logistics Architecture .....	4-577
4.9.2.4	Management Logistics Process Description.....	4-577
4.9.2.5	Management Logistics Process Interface Descriptions .....	4-577
4.9.2.6	Management Logistics Data Stores .....	4-577
4.9.3	ECS Assistant Script Library .....	4-578
4.9.3.1	ECS Assistant Script Library Functional Overview.....	4-578
4.9.3.2	ECS Assistant Script Library Context.....	4-578
4.9.3.3	ECS Assistant Script Library Architecture .....	4-578
4.9.3.4	ECS Assistant Script Library Processes.....	4-578
4.9.3.5	ECS Assistant Script Library Process Interface Descriptions.....	4-578
4.9.3.6	ECS Assistant Script Library Data Stores.....	4-580
4.9.4	Systems Management Subsystem Hardware Components .....	4-593
4.9.4.1	MHCI Description.....	4-593
4.10	Internetworking Subsystem (ISS) Overview.....	4-595
4.10.1	Internetworking Subsystem Description .....	4-596
4.10.1.1	DAAC LAN Architecture .....	4-596
4.10.1.2	SMC Network Architecture.....	4-597
4.10.1.3	DAAC Addressing and Routing Architecture.....	4-598
4.10.1.4	Network-based Security Architecture .....	4-598
4.10.1.5	Internetworking Subsystem Detailed Design.....	4-598
4.10.2	Network COTS Hardware .....	4-599
4.10.2.1	ECS Ethernet Switch.....	4-599

4.10.2.2	ECS Router.....	4-599
4.10.2.3	High-speed Gig Ethernet Switch.....	4-600
4.10.2.4	Firewall.....	4-600
4.11	ECS General Process Failure Recovery Concepts .....	4-601
4.11.1	Client-Server Rebinding.....	4-601
4.11.2	Sybase Reconnecting.....	4-602
4.11.3	Request Identification.....	4-603
4.11.4	Senior Clients .....	4-604
4.11.5	Request Responsibility.....	4-604
4.11.6	Queues.....	4-606
4.11.7	Request Responses .....	4-606
4.11.8	Duplicate Request Detection .....	4-611
4.11.9	Server Crash and Restart.....	4-612
4.11.10	Client Crash and Restart.....	4-617
4.12	Product Distribution System (PDS) Subsystem Overview .....	4-622
	PDSIS Error and Debug Log Handling.....	4-628
4.12.1	Product Distribution System Internal Server (PDSIS) Software Description ...	4-630
4.12.1.1	PDSIS Functional Overview .....	4-630
4.12.1.2	PDSIS Context .....	4-630
4.12.1.3	PDSIS Architecture .....	4-632
4.12.1.4	PDSIS Process Descriptions.....	4-633
4.12.1.5	PDSIS Process Interface Descriptions .....	4-634
4.12.1.6	PDSIS CSCI Data Stores.....	4-637
4.12.2	Product Distribution System Standalone (PDSSA) Software Description .....	4-638
4.12.2.1	PDSSA Functional Overview.....	4-638
4.12.2.2	PDSSA Context.....	4-638
4.12.2.3	PDSSA Architecture.....	4-639
4.12.2.4	PDSSA Process Descriptions .....	4-639
4.12.2.5	PDSSA Process Interface Descriptions .....	4-641
4.12.2.6	PDSSA Data Stores .....	4-643
4.12.2.7	PDS Hardware Section.....	4-644

## 5. Limitations of Current Implementation

5.1	Data Server Subsystem.....	5-1
5.2	Planning Subsystem .....	5-1
5.3	Infrastructure Subsystem.....	5-1
5.4	MSS Subsystem.....	5-2

## List of Figures

Figure 3.2-1. Example Hierarchical Software Diagram .....	3-13
Figure 3.2-2. Release 6B Context Diagram .....	3-15
Figure 3.2-3. Subsystem Architecture Diagram .....	3-17
Figure 4.1-1. Data Server Subsystem Context Diagram .....	4-33
Figure 4.1-2. SDSRV CSCI Context Diagram.....	4-47
Figure 4.1-3. SDSRV CSCI Architecture Diagram .....	4-56
Figure 4.1-4. DDIST CSCI Context Diagram.....	4-86
Figure 4.1-5. DDIST CSCI Architecture Diagram.....	4-90
Figure 4.1-6. STMGT CSCI Context Diagram .....	4-102
Figure 4.1-7. Sample FTP Pull Distribution Request.....	4-107
Figure 4.1-8. STMGT CSCI INGEST Architecture Diagram.....	4-108
Figure 4.1-9. STMGT CSCI DISTRIBUTION STAGING Architecture Diagram .....	4-109
Figure 4.1-10. STMGT CSCI DISTRIBUTION TRANSFER Architecture Diagram .....	4-110
Figure 4.1-11. STMGT CSCI Registry Architecture Diagram .....	4-111
Figure 4.2-1. Ingest Subsystem Context Diagram .....	4-140
Figure 4.2-2. INGST CSCI Context Diagram.....	4-147
Figure 4.2-3. INGST CSCI Architecture Diagram INGEST Process Descriptions .....	4-152
Figure 4.3-1. Client Subsystem Context Diagram .....	4-168
Figure 4.3-2. WKBCH CSCI Context Diagram.....	4-175
Figure 4.3-3. EOSView Architecture Diagram .....	4-178
Figure 4.3-4. Java DAR Tool Architecture Diagram .....	4-179
Figure 4.3-5. ODFRM CSCI Context Diagram .....	4-189
Figure 4.3-6. ODFRM Architecture Diagram .....	4-192
Figure 4.3-7. DESKT CSCI Context Diagram.....	4-201
Figure 4.3-8. DESKT CSCI Architecture Diagram .....	4-203
Figure 4.4-1. Data Management Subsystem Context Diagram.....	4-209
Figure 4.4-2. Data Dictionary CSCI Context Diagram .....	4-217

Figure 4.4-3. Data Dictionary CSCI Architecture Diagram.....	4-219
Figure 4.4-4. V0 GTWAY CSCI Context Diagram.....	4-227
Figure 4.4-5. V0 GTWAY CSCI Architecture Diagram.....	4-234
Figure 4.5-1. Order Manager Subsystem Context Diagram.....	4-249
Figure 4.5-2. Order Manager Server CSCI Context Diagram.....	4-252
Figure 4.5-3. Order Manager Server CSCI Architecture Diagram.....	4-254
Figure 4.6-1. Planning Subsystem Context Diagram.....	4-258
Figure 4.6-2. PLANG CSCI Context Diagram .....	4-264
Figure 4.6-3. PLANG CSCI Architecture Diagram .....	4-268
Figure 4.7-1. Data Processing Subsystem Context Diagram .....	4-295
Figure 4.7-2. PRONG CSCI Context Diagram .....	4-309
Figure 4.7-3. PRONG CSCI Architecture Diagram.....	4-314
Figure 4.7-4. AITTL Context Diagram .....	4-336
Figure 4.7-5. AITTL CSCI Architecture Diagram.....	4-338
Figure 4.8-1. Communications Subsystem (CSS) Context Diagram.....	4-354
Figure 4.8-2. Subscription Server Context Diagram.....	4-370
Figure 4.8-3. Subscription Server Architecture Diagram.....	4-373
Figure 4.8-4. ASTER DAR Gateway Server Context Diagram.....	4-381
Figure 4.8-5. ASTER DAR Gateway Server Architecture Diagram.....	4-383
Figure 4.8-6. E-mail Parser Gateway Server Context Diagram .....	4-389
Figure 4.8-7. E-mail Parser Gateway Server Architecture Diagram.....	4-391
Figure 4.8-8. MOJO Gateway Server Context Diagram .....	4-397
Figure 4.8-9. MOJO Gateway Server Architecture Diagram.....	4-400
Figure 4.8-10. Configuration Registry Server Context Diagram .....	4-409
Figure 4.8-11. Configuration Registry Server Architecture Diagram.....	4-412
Figure 4.8-12. Machine-to-Machine Gateway Server Context Diagram .....	4-419
Figure 4.8-13. Machine-to-Machine Gateway Server Architecture Diagram .....	4-421
Figure 4.8-14. CCS Middleware Context Diagram.....	4-430
Figure 4.8-15. CCS Middleware Architecture Diagram .....	4-431

Figure 4.8-16. File Transfer Protocol Server Context Diagram.....	4-434
Figure 4.8-17. File Transfer Protocol Architecture Diagram.....	4-435
Figure 4.8-18. File Transfer Protocol Notification Context Diagram.....	4-437
Figure 4.8-19. File Transfer Protocol Notification Architecture Diagram.....	4-438
Figure 4.8-20. Bulk Data Server Protocol compared with ONC Protocols .....	4-441
Figure 4.8-21. Bulk Data Server Context Diagram.....	4-442
Figure 4.8-22. Bulk Data Server Architecture Diagram.....	4-443
Figure 4.8-23. Network File System Context Diagram.....	4-444
Figure 4.8-24. Network File System Architecture Diagram .....	4-445
Figure 4.8-25. Filecopy Context Diagram.....	4-448
Figure 4.8-26. Filecopy Architecture Diagram .....	4-449
Figure 4.8-27. E-mail Server Context Diagram .....	4-451
Figure 4.8-28. E-mail Server Architecture Diagram .....	4-452
Figure 4.8-29. Virtual Terminal Context Diagram.....	4-454
Figure 4.8-30. Virtual Terminal Architecture Diagram .....	4-455
Figure 4.8-31. Cryptographic Management Interface Context Diagram .....	4-457
Figure 4.8-32. Cryptographic Management Interface Architecture Diagram .....	4-458
Figure 4.8-33. Domains Hierarchy Diagram.....	4-461
Figure 4.8-34. DNS Domains of the ECS Project Diagram.....	4-462
Figure 4.8-35. ECS Topology Domains Diagram.....	4-462
Figure 4.8-36. Domain Name Server Context Diagram.....	4-463
Figure 4.8-37. Distributed Computing Configuration Item (DCCI) CSCI Context Diagram.	4-471
Figure 4.9-1. System Management Subsystem Context Diagram.....	4-486
Figure 4.9-1. System Management Subsystem Context Diagram (cont.) .....	4-487
Figure 4.9-2. Network and Enterprise Management Framework Context Diagram .....	4-496
Figure 4.9-3. Network and Enterprise Management Framework Architecture Diagram .....	4-497
Figure 4.9-4. Security Service Context Diagram .....	4-503
Figure 4.9-5. Security Service Architecture Diagram .....	4-504
Figure 4.9-6. Accountability Management Service Context Diagram.....	4-508

Figure 4.9-7. Accountability Management Service Architecture Diagram.....	4-513
Figure 4.9-8. Trouble Ticket Context Diagram.....	4-537
Figure 4.9-9. Trouble Ticket Architecture Diagram .....	4-539
Figure 4.9-10. Networker Backup/Restore Architecture Diagram.....	4-545
Figure 4.9-11. ASTER E-mail Header Handler Context Diagram.....	4-547
Figure 4.9-12. ASTER E-mail Header Handler Architecture Diagram .....	4-549
Figure 4.9-13. Management Software CSCI (MCI) Context Diagram .....	4-553
Figure 4.9-14. Management Software CSCI (MCI) Architecture Diagram.....	4-556
Figure 4.9-15. Inventory/Logistics/Maintenance (ILM) Manager Architecture Diagram .....	4-568
Figure 4.9-16. Software License Manager Architecture Diagram .....	4-574
Figure 4.10-1. DAAC Networks: Generic Architecture Diagram.....	4-596
Figure 4.10-2. SMC Network Architecture Diagram.....	4-597
Figure 4.12-0. PDS Data Flow .....	4-624
Figure 4.12-1. PDS Subsystem Context Diagram.....	4-625
Figure 4.12-2. PDSIS CSCI Context Diagram.....	4-631
Figure 4.12-3. PDSIS CSCI Architecture Diagram .....	4-633
Figure 4.12-4. PDSSA CSCI Architecture Diagram.....	4-639

## List of Tables

Table 4.1-1. Memory Management Table.....	4-6
Table 4.1-2. Data Server Subsystem Interface Events .....	4-36
Table 4.1-3. SDSRV CSCI Interface Events.....	4-50
Table 4.1-4. SDSRV CSCI Processes .....	4-60
Table 4.1-5. SDSRV CSCI Process Interface Events .....	4-62
Table 4.1-6. SDSRV CSCI Data Stores .....	4-84
Table 4.1-7. DDIST CSCI Interface Events.....	4-88
Table 4.1-8. DDIST CSCI Processes .....	4-91
Table 4.1-9. DDIST CSCI Process Interface Events.....	4-92
Table 4.1-10. DDIST CSCI Data Stores .....	4-99

Table 4.1-11. STMGT CSCI Interface Events .....	4-103
Table 4.1-12. STMGT CSCI Processes.....	4-113
Table 4.1-13. STMGT CSCI INGEST Process Interface Events.....	4-114
Table 4.1-14. STMGT CSCI DISTRIBUTION STAGING Process Interface Events .....	4-121
Table 4.1-15. STMGT CSCI DISTRIBUTION TRANSFER Process Interface Events .....	4-125
Table 4.1-16. STMGT CSCI Registry Process Interface Events .....	4-131
Table 4.1-17. STMGT CSCI Data Stores.....	4-132
Table 4.1.4.1-1. Access Control and Management HWCI Descriptions.....	4-136
Table 4.1.4.2-1. Data Repository HWCI Descriptions.....	4-137
Table 4.1.4.3-1. Working Storage HWCI Descriptions .....	4-138
Table 4.2-1. Ingest Subsystem Interface Events .....	4-141
Table 4.2-2. INGST CSCI Interface Events.....	4-149
Table 4.2-3. INGST CSCI Processes .....	4-153
Table 4.2-4. INGST CSCI Process Interface Events.....	4-154
Table 4.2-5. INGST CSCI Data Stores .....	4-164
Table 4.3-1. Client Subsystem Interface Events .....	4-169
Table 4.3-2. WKBCH CSCI Interface Events.....	4-176
Table 4.3-3. WKBCH CSCI Processes .....	4-180
Table 4.3-4. WKBCH CSCI (EOSView) Process Interface Events.....	4-180
Table 4.3-5. WKBCH CSCI Data Stores .....	4-188
Table 4.3-6. ODFRM CSCI Interface Events .....	4-190
Table 4.3-7. ODFRM Processes.....	4-193
Table 4.3-8. ODFRM Process Interface Events .....	4-194
Table 4.3-9. ODFRM Data Stores.....	4-200
Table 4.3-10. DESKT CSCI Interface Events.....	4-202
Table 4.3-11. DESKT CSCI Processes .....	4-204
Table 4.3-12. DESKT CSCI Process Interface Events.....	4-204
Table 4.4-1. Data Management Subsystem Interface Events.....	4-211
Table 4.4-2. Data Dictionary CSCI Interface Events .....	4-218

Table 4.4-3. Data Dictionary CSCI Processes .....	4-220
Table 4.4-4. Data Dictionary CSCI Process Interface Events.....	4-221
Table 4.4-5. Data Dictionary CSCI Data Stores .....	4-226
Table 4.4-6. V0 GTWAY CSCI Interface Events.....	4-229
Table 4.4-7. V0 GTWAY CSCI Processes .....	4-237
Table 4.4-8. V0 GTWAY CSCI Process Interface Events.....	4-238
Table 4.4-9. V0 GTWAY CSCI Data Store.....	4-247
Table 4.5-1. Order Manager Subsystem Interface Events.....	4-250
Table 4.5-2. Order Manager Server CSCI Interface Events.....	4-252
Table 4.5-4. OMSRV CSCI Process .....	4-255
Table 4.5-5. Order Manager Server CSCI Process Interface Events.....	4-255
Table 4.5-6. Order Manager Server (OMSRV) CSCI Data Stores .....	4-257
Table 4.6-1. Planning Subsystem Interface Events.....	4-259
Table 4.6-2. PLANG CSCI Interface Events .....	4-265
Table 4.6-3. PLANG CSCI Processes.....	4-271
Table 4.6-4. PLANG CSCI Process Interface Events .....	4-273
Table 4.6-5. PLANG CSCI Data Stores.....	4-292
Table 4.7-1. Data Processing Subsystem Interface Events .....	4-296
Table 4.7-3. PRONG CSCI Interface Events.....	4-311
Table 4.7-4. PRONG CSCI Processes.....	4-318
Table 4.7-5. PRONG CSCI Process Interface Events.....	4-322
Table 4.7-6. PRONG CSCI Data Stores.....	4-334
Table 4.7-7. AITTL Interface Events .....	4-337
Table 4.7-8. AITTL Processes .....	4-339
Table 4.7-9. AITTL Process Interface Events.....	4-341
Table 4.7-10. AITTL Data Stores .....	4-348
Table 4.8-1. Communications Subsystem (CSS) Interface Events.....	4-356
Table 4.8-2. Subscription Server Interface Events.....	4-371
Table 4.8-3. Subscription Server Processes .....	4-374

Table 4.8-4. Subscription Server Process Interface Events.....	4-375
Table 4.8-5. Subscription Server Data Stores .....	4-380
Table 4.8-6. ASTER DAR Gateway Server Interface Events.....	4-382
Table 4.8-7. ASTER DAR Gateway Server Processes .....	4-384
Table 4.8-8. ASTER DAR Gateway Server Process Interface Events.....	4-385
Table 4.8-9. E-mail Parser Gateway Server Interface Events .....	4-389
Table 4.8-10. E-mail Parser Gateway Server Processes.....	4-392
Table 4.8-11. E-mail Parser Gateway Server Process Interface Events.....	4-392
Table 4.8-12. MOJO Gateway Server Interface Events .....	4-398
Table 4.8-13. MOJO Gateway Server Processes.....	4-402
Table 4.8-14. MOJO Gateway Server Process Interface Events.....	4-403
Table 4.8-15. Configuration Registry Server Interface Events .....	4-410
Table 4.8-16. Configuration Registry Server Processes.....	4-413
Table 4.8-17. Configuration Registry Server Process Interface Events.....	4-413
Table 4.8-18. Configuration Registry Server Data Stores.....	4-417
Table 4.8-19. Machine-to-Machine Gateway Server Interface Event.....	4-419
Table 4.8-20. Machine-to-Machine Gateway Server Processes.....	4-423
Table 4.8-21. Machine-to-Machine Gateway Server Process Interface Events .....	4-424
Table 4.8-22. CCS Middleware Interface Events.....	4-430
Table 4.8-23. CCS Middleware Processes .....	4-432
Table 4.8-24. CCS Middleware Process Interface Events .....	4-433
Table 4.8-25. CCS Middleware Data Stores .....	4-434
Table 4.8-26. File Transfer Protocol Interface Events .....	4-435
Table 4.8-27. File Transfer Protocol Processes.....	4-435
Table 4.8-28. File Transfer Protocol Process Interface Events .....	4-436
Table 4.8-29. File Transfer Protocol Notification Interface Events.....	4-438
Table 4.8-30. File Transfer Protocol Notification Processes .....	4-439
Table 4.8-31. File Transfer Protocol Notification Process Interface Events.....	4-439
Table 4.8-32. File Transfer Protocol Data Stores.....	4-440

Table 4.8-33. Bulk Data Server Interface Events.....	4-442
Table 4.8-34. Bulk Data Server Processes .....	4-443
Table 4.8-35. Bulk Data Server Process Interface Events.....	4-444
Table 4.8-36. Network File System Interface Events.....	4-445
Table 4.8-37. Network File System Processes .....	4-446
Table 4.8-38. Network File System Process Interface Events .....	4-447
Table 4.8-39. Filecopy Interface Events.....	4-449
Table 4.8-40. Filecopy Process .....	4-450
Table 4.8-41. Filecopy Process Interface Events .....	4-450
Table 4.8-42. E-mail Server Interface Events .....	4-452
Table 4.8-43. E-mail Server Processes.....	4-453
Table 4.8-44. E-mail Server Process Interface Events .....	4-453
Table 4.8-45. Virtual Terminal Interface Events.....	4-455
Table 4.8-46. Virtual Terminal Processes .....	4-456
Table 4.8-47. Virtual Terminal Process Interface Events .....	4-456
Table 4.8-48. Cryptographic Management Interface Events.....	4-457
Table 4.8-49. Cryptographic Management Interface Processes .....	4-459
Table 4.8-50. Cryptographic Management Interface Process Interface Events .....	4-459
Table 4.8-51. Cryptographic Management Interface Data Stores .....	4-460
Table 4.8-52. Domain Name Server Process.....	4-463
Table 4.8-53. Domain Name Server Process Interface Events.....	4-464
Table 4.8-54. Domain Name Server Data Stores .....	4-464
Table 4.8-55. Infrastructure Libraries .....	4-465
Table 4.8-56. Infrastructure Libraries Group Interfaces.....	4-467
Table 4.8-57. Distributed Computing Configuration Item (DCCI) CSCI Interface Events....	4-475
Table 4.8-58. SDPS/CSMS CSCI to CSS CSC Mappings .....	4-481
Table 4.9-1. System Management Subsystem Interface Events.....	4-488
Table 4.9-2. Network and Enterprise Management Framework Interface Events .....	4-497
Table 4.9-3. Network and Enterprise Management Framework Processes.....	4-498

Table 4.9-4. Network and Enterprise Management Framework Process Interface Events .....	4-498
Table 4.9-5. Network and Enterprise Management Framework Data Stores.....	4-503
Table 4.9-6. Security Service Interface Events .....	4-504
Table 4.9-7. Security Service Processes.....	4-505
Table 4.9-8. Security Service Process Interface Events .....	4-505
Table 4.9-9. Security Service Data Stores.....	4-506
Table 4.9-10. Accountability Management Service Interface Events .....	4-510
Table 4.9-11. Accountability Management Service Processes .....	4-518
Table 4.9-12. Accountability Management Service Process Interface Events.....	4-520
Table 4.9-13. Accountability Management Service Data Stores .....	4-536
Table 4.9-14. Trouble Ticket Interface Events.....	4-538
Table 4.9-15. Trouble Ticket Processes .....	4-540
Table 4.9-16. Trouble Ticket Process Interface Events .....	4-541
Table 4.9-17. Trouble Ticket Data Stores .....	4-544
Table 4.9-18. Networker Backup/Restore Processes .....	4-545
Table 4.9-19. Networker Backup/Restore Process Interface Events.....	4-546
Table 4.9-20. Networker Backup/Restore Data Stores .....	4-546
Table 4.9-21. ASTER E-mail Header Handler Interface Events.....	4-548
Table 4.9-22. ASTER E-mail Header Handler Processes .....	4-550
Table 4.9-23. ASTER E-mail Header Handler Process Interface Events .....	4-550
Table 4.9-24. ASTER E-mail Header Handler Data Stores .....	4-553
Table 4.9-25. Management Software CSCI (MCI) Interface Events .....	4-554
Table 4.9-26. Management Software CSCI (MCI) Processes.....	4-558
Table 4.9-27. Management Software CSCI (MCI) Process Interface Events .....	4-560
Table 4.9-28. Inventory/Logistics/Maintenance (ILM) Manager Processes.....	4-569
Table 4.9-29. ILM Manager Process Interface Events.....	4-569
Table 4.9-30. Inventory/Logistics/Maintenance (ILM) Manager Data Stores.....	4-571
Table 4.9-31. Software Change Manager Processes .....	4-572
Table 4.9-32. Software Change Manager Data Stores .....	4-573

Table 4.9-33. Software License Manager Processes .....	4-575
Table 4.9-34. Software License Manager Process Interface Events .....	4-576
Table 4.9-35. Software License Manager Data Stores .....	4-577
Table 4.9-36. ECS Assistant Script Functions .....	4-578
Table 4.9-37. Applications File Format .....	4-581
Table 4.9-38. Cfgparms File Format .....	4-581
Table 4.9-39. Cfgpatch file format .....	4-582
Table 4.9-40. Components file format .....	4-583
Table 4.9-41. Executables file format .....	4-585
Table 4.9-42. Hostmap file format .....	4-585
Table 4.9-43. Installtypes file format .....	4-586
Table 4.9-44. Packages file format .....	4-587
Table 4.9-45. Sitehostmap file format .....	4-588
Table 4.9-46. Sitemap file format .....	4-589
Table 4.9-47. Subsystems file format .....	4-590
Table 4.9-48. Functions .....	4-591
Table 4.9-49. Start Scripts .....	4-592
Table 4.9-50. Mkcfig Scripts .....	4-592
Table 4.10-1. Internetworking Subsystem Baseline Documentation List .....	4-598
Table 4.10-2. Networking Hardware for ECS Networks .....	4-599
Table 4.11-1. Request Responses .....	4-608
Table 4.11-2. Fault Handling Policies .....	4-609
Table 4.11-3. Server Response versus Restart Temperature .....	4-613
Table 4.11-4. Server Response for Request Re-submission .....	4-616
Table 4.11-5. Server Responses to Client Failures .....	4-618
Table 4.11-6. Client Restart Notification Exceptions .....	4-619
Table 4.11-7. Server Responses to Client Notification .....	4-620
Table 4.12-1. PDS Subsystem Interface Events .....	4-626
Table 4.12-2. PDSIS CSCI Interface Events .....	4-632

Table 4.12-3. PDSIS CSCI Processes .....	4-634
Table 4.12-4. PDSIS CSCI Process Interface Events .....	4-635
Table 4.12-5. PDSIS CSCI Data Stores .....	4-638
Table 4.12-6. PDSSA CSCI Processes.....	4-640
Table 4.12-7. PDSSA Process Interface Events.....	4-642
Table 4.12-8. PDSSA CSCI Data Stores.....	4-643

## **Appendix A. Software Processes**

Subsystem DSS .....	A-1
Subsystem INS .....	A-47
Subsystem CLS .....	A-56
Subsystem DMS .....	A-69
Subsystem PLS.....	A-79
Subsystem DPS .....	A-124
Subsystem CSS .....	A-195
Subsystem MSS.....	A-226
Subsystem DPL.....	A-238
Subsystem OMS .....	A-242
Subsystem OSS .....	A-248
Subsystem SSS.....	A-248

## **Appendix B. Software Libraries**

## **Appendix C. JAVA Archives**

## **Appendix D. Scripts**

## **Abbreviations and Acronyms**

This page intentionally left blank.

# 1. Introduction

---

## 1.1 Purpose and Scope

The purpose of the Segment/Design Specification for the Earth Observing System (EOS) Data and Information System (EOSDIS) Core System (ECS) is to provide an overview of the hardware and software subsystems of the project. This document describes the high-level design of each ECS software subsystem implemented to satisfy the allocated and derived functional and performance requirements. This document also provides basic descriptions of the Commercial Off The Shelf (COTS) hardware and software used in the ECS. This document contains:

- Functional overviews of each Computer Software Configuration Item (CSCI)
- Context diagrams of each CSCI
- Interface event descriptions based on the context diagrams
- Process architecture diagrams
- Interface event description tables based on the process architecture diagrams
- CSCI data stores (databases as they relate to the process architecture diagrams)
- CSCI functions allocated to processes. For data servers, this includes descriptions of the functionality offered to clients via the server interfaces. For Graphical User Interface (GUI) applications, it describes the functionality provided to the GUI users
- Specific limitations of the capabilities provided
- Summary of object classes listed by CSCI
- Summary of class libraries listed by CSCI
- Abbreviations and Acronyms

Hyper-linked on-line documentation generated by ABC++ is provided to accompany this document. The various subsystems, sub-directories, processes, libraries, and classes can be browsed down to the code level. This documentation can be accessed through the Universal Resource Locator (URL) <http://guinness.hitc.com:8080/ecs/index.html> for those who have access to the ECS internally at the Landover Facility. For anyone not having access to the ECS internally at the Landover facility, the Data Management Office of the ECS Project must be contacted for access.

Under every process, library or script documented in Appendix A, B, C or D, there is a directory string. This string indicates the location of the Makefile and sources for the library.

This same directory string can be used to locate on-line documentation. This is accomplished by replacing the “/ecs/formal” part of the directory string with the URL for the on-line

documentation associated with the page on which the classes are listed along with the names of processes and libraries which share those classes.

## **1.2 Document Organization**

The remainder of this document is organized as follows:

- Section 2: Related Documentation
- Section 3: System Description
- Section 4: Subsystem Description
- Section 5: Limitations of Current Implementation
- Appendix A: Software Processes
- Appendix B: Software Libraries
- Appendix C: JAVA Archives
- Appendix D: Scripts
- Abbreviations and Acronyms

## 2. Related Documentation

---

### 2.1 Parent Documents

The parent documents are the documents from which the scope and content of this Design Specification are derived. These documents are listed below.

194-207-SEI	System Design Specification for the ECS Project
305/DV2 (F)	Segment/Design Specifications for the ECS Project
212-WP-002	Game Plan for the ECS Project

### 2.2 Applicable Documents

Hardware related documents referenced in this document are listed below.

#### 910-series General Baseline

910-TDA-005	Site-Host Map Report (ClearCase BLM)
-------------	--------------------------------------

#### 920-series General documents

920-TDE-001	EDC Hardware-Design Diagram
920-TDG-001	GSFC Hardware-Design Diagram
920-TDL-001	LaRC Hardware-Design Diagram
920-TDN-001	NSIDC Hardware-Design Diagram
920-TDS-001	SMC Hardware-Design Diagram
920-TDV-001	VATC Hardware-Design Diagram
920-TDP-001	PVC Hardware-Design Diagram
920-TDE-002	EDC Hardware-Software Map
920-TDG-002	GSFC Hardware-Software Map
920-TDL-002	LaRC Hardware-Software Map
920-TDN-002	NSIDC Hardware-Software Map
920-TDS-002	SMC Hardware-Software Map

920-TDV-002	VATC Hardware-Software Map
920-TDP-002	PVC Hardware-Software Map
920-TDE-003	EDC System Infrastructure
920-TDG-003	GSFC System Infrastructure
920-TDL-003	LaRC System Infrastructure
920-TDN-003	NSIDC System Infrastructure
920-TDV-003	VATC System Infrastructure
920-TDP-003	PVC System Infrastructure
920-TDE-004	EDC Floor Plan
920-TDG-004	GSFC Floor Plan
920-TDL-004	LaRC Floor Plan
920-TDN-004	NSIDC Floor Plan
920-TDS-004	SMC Floor Plan
920-TDV-004	VATC Floor Plan
920-TDP-004	PVC Floor Plan
920-TDE-005	EDC Cable Management Plan
920-TDG-005	GSFC Cable Management Plan
920-TDL-005	LaRC Cable Management Plan
920-TDN-005	NSIDC Cable Management Plan
920-TDS-005	SMC Cable Management Plan
920-TDV-005	VATC Cable Management Plan
920-TDP-005	PVC Cable Management Plan
920-TDE-007	EDC Vendor Documentation
920-TDG-007	GSFC Vendor Documentation
920-TDL-007	LaRC Vendor Documentation
920-TDN-007	NSIDC Vendor Documentation

920-TDE-008	EDC Mount Points
920-TDG-008	GSFC Mount Points
920-TDL-008	LaRC Mount Points
920-TDN-008	NSIDC Mount Points
920-TDV-008	VATC Mount Points
920-TDP-008	PVC Mount Points
920-TDE-009	EDC DAAC HW Database Mapping
920-TDG-009	GSFC DAAC HW Database Mapping
920-TDL-009	LaRC DAAC HW Database Mapping
920-TDN-009	NSIDC DAAC HW Database Mapping
920-TDS-009	SMC DAAC HW Database Mapping
920-TDV-009	VATC DAAC HW Database Mapping
920-TDP-009	PVC DAAC HW Database Mapping
920-TDE-010	EDC DAAC Database Config (Superseded by 910-TDA-021)
920-TDG-010	GSFC DAAC Database Config (Superseded by 910-TDA-021)
920-TDL-010	LaRC DAAC Database Config (Superseded by 910-TDA-021)
920-TDN-010	NSIDC DAAC Database Config (Superseded by 910-TDA-021)
920-TDS-010	SMC DAAC Database Config (Superseded by 910-TDA-021)
920-TDV-010	VATC DAAC Database Config (Superseded by 910-TDA-021)
920-TDP-010	PVC DAAC Database Config (Superseded by 910-TDA-021)
920-TDE-012	EDC DAAC SCSI Cable Management Plan
920-TDG-012	GSFC DAAC SCSI Cable Management Plan
920-TDL-012	LaRC DAAC SCSI Cable Management Plan
920-TDN-012	NSIDC DAAC SCSI Cable Management Plan
920-TDP-012	PVC DAAC SCSI Cable Management Plan

920-TDE-013	EDC Custom Code Configuration Parameters (Superseded by 910-TDA-022)
920-TDG-013	GSFC Custom Code Configuration Parameters (Superseded by 910-TDA-022)
920-TDL-013	LaRC Custom Code Configuration Parameters (Superseded by 910-TDA-022)
920-TDN-013	NSIDC Custom Code Configuration Parameters (Superseded by 910-TDA-022)
920-TDS-013	SMC Custom Code Configuration Parameters (Superseded by 910-TDA-022)
920-TDV-013	VATC Custom Code Configuration Parameters (Superseded by 910-TDA-022)
920-TDP-013	PVC Custom Code Configuration Parameters (Superseded by 910-TDA-022)
920-TDE-014	EDC Operating System (O/S) and COTS Patch Maps (ClearCase BLM)
920-TDG-014	GSFC Operating System (O/S) and COTS Patch Maps (ClearCase BLM)
920-TDL-014	LaRC Operating System (O/S) and COTS Patch Maps (ClearCase BLM)
920-TDN-014	NSIDC Operating System (O/S) and COTS Patch Maps (ClearCase BLM)
920-TDS-014	SMC Operating System (O/S) and COTS Patch Maps (ClearCase BLM)
920-TDV-014	VATC Operating System (O/S) and COTS Patch Maps (ClearCase BLM)
920-TDP-014	PVC Operating System (O/S) and COTS Patch Maps (ClearCase BLM)
920-TDE-015	EDC Sun Platform Unix Kernel Configuration Parameters
920-TDG-015	GSFC Sun Platform Unix Kernel Configuration Parameters
920-TDL-015	LaRC Sun Platform Unix Kernel Configuration Parameters

920-TDN-015	NSIDC Sun Platform Unix Kernel Configuration Parameters
920-TDS-015	SMC Sun Platform Unix Kernel Configuration Parameters
920-TDV-015	VATC Sun Platform Unix Kernel Configuration Parameters
920-TDP-015	PVC Sun Platform Unix Kernel Configuration Parameters
920-TDE-016	EDC SGI Platform Unix Kernel Configuration Parameters
920-TDG-016	GSFC SGI Platform Unix Kernel Configuration Parameters
920-TDL-016	LaRC SGI Platform Unix Kernel Configuration Parameters
920-TDN-016	NSIDC SGI Platform Unix Kernel Configuration Parameters
920-TDV-016	VATC SGI Platform Unix Kernel Configuration Parameters
920-TDP-016	PVC SGI Platform Unix Kernel Configuration Parameters
920-TDE-018	EDC Host Memory (Configuration Parameters) [retired, See 920-TDE-001]
920-TDG-018	GSFC Host Memory (Configuration Parameters) [retired, See 920-TDG-001]
920-TDL-018	LaRC Host Memory (Configuration Parameters) [retired, See 920-TDL-001]
920-TDN-018	NSIDC Host Memory (Configuration Parameters) [retired, See 920-TDN-001]
920-TDS-018	SMC Host Memory (Configuration Parameters) [retired, See 920-TDS-001]
920-TDV-018	VATC Host Memory (Configuration Parameters) [retired, See 920-TDV-001]
920-TDP-018	PVC Host Memory (Configuration Parameters) [retired, See 920-TDP-001]
920-TDE-019	EDC Custom Code Baseline (Configuration Parameters)
920-TDG-019	GSFC Custom Code Baseline (Configuration Parameters)
920-TDL-019	LaRC Custom Code Baseline (Configuration Parameters)
920-TDN-019	NSIDC Custom Code Baseline (Configuration Parameters)

920-TDS-019	SMC Custom Code Baseline (Configuration Parameters)
920-TDV-019	VATC Custom Code Baseline (Configuration Parameters)
920-TDP-019	PVC Custom Code Baseline (Configuration Parameters)

**921-series Network Infrastructure documents**

921-TDE-001	EDC Network Overview Diagram (LAN Topology)
921-TDG-001	GSFC Network Overview Diagram (LAN Topology)
921-TDL-001	LaRC Network Overview Diagram (LAN Topology)
921-TDN-001	NSIDC Network Overview Diagram (LAN Topology)
921-TDS-001	SMC Network Overview Diagram (LAN Topology)
921-TDV-001	VATC Network Overview Diagram (LAN Topology)
921-TDP-001	PVC Network Overview Diagram (LAN Topology)

921-TDE-002	EDC Hardware Network Diagram
921-TDG-002	GSFC Hardware Network Diagram
921-TDL-002	LaRC Hardware Network Diagram
921-TDN-002	NSIDC Hardware Network Diagram
921-TDS-002	SMC Hardware Network Diagram
921-TDV-002	VATC Hardware Network Diagram
921-TDP-002	PVC Hardware Network Diagram

921-TDE-003	EDC Host IP (Address) Assignments
921-TDG-003	GSFC Host IP (Address) Assignments
921-TDL-003	LaRC Host IP (Address) Assignments
921-TDN-003	NSIDC Host IP (Address) Assignments
921-TDS-003	SMC Host IP (Address) Assignments
921-TDV-003	VATC Host IP (Address) Assignments
921-TDP-003	PVC Host IP (Address) Assignments

921-TDE-004 EDC Network IP (Address) Assignments  
921-TDG-004 GSFC Network IP (Address) Assignments  
921-TDL-004 LaRC Network IP (Address) Assignments  
921-TDN-004 NSIDC Network IP (Address) Assignments  
921-TDS-004 SMC Network IP (Address) Assignments  
921-TDV-004 VATC Network IP (Address) Assignments  
921-TDP-004 PVC Network IP (Address) Assignments

921-TDE-005 EDC Dual-Homed Host Static Routes  
921-TDG-005 GSFC Dual-Homed Host Static Routes  
921-TDL-005 LaRC Dual-Homed Host Static Routes  
921-TDN-005 NSIDC Dual-Homed Host Static Routes  
921-TDV-005 VATC Dual-Homed Host Static Routes  
921-TDP-005 PVC Dual-Homed Host Static Routes

921-TDE-006 EDC Ingest Host Static Routes [retired]  
921-TDG-006 GSFC Ingest Host Static Routes [retired]  
921-TDL-006 LaRC Ingest Host Static Routes [retired]

**922-series Disk Partitions documents**

922-TDE-001 EDC APC Server (Primary/Secondary)  
922-TDG-001 GSFC APC Server (Primary/Secondary)  
922-TDL-001 LaRC APC Server (Primary/Secondary)  
922-TDN-001 NSIDC APC Server (Primary/Secondary)  
922-TDV-001 VATC APC Server (Primary/Secondary)  
922-TDP-001 PVC APC Server (Primary/Secondary)  
  
922-TDE-002 EDC Application Server (Primary/Secondary)

922-TDG-002	GSFC Application Server (Primary/Secondary)
922-TDL-002	LaRC Application Server (Primary/Secondary)
922-TDN-002	NSIDC Application Server (Primary/Secondary)
922-TDS-002	SMC Application Server (Primary/Secondary)
922-TDV-002	VATC Application Server (Primary/Secondary)
922-TDP-002	PVC Application Server (Primary/Secondary)
922-TDG-003	GSFC AQA Server
922-TDL-003	LaRC AQA Server
922-TDP-004	PVC Dashboard Server
922-TDE-005	EDC CSS Server
922-TDG-005	GSFC CSS Server
922-TDL-005	LaRC CSS Server
922-TDN-005	NSIDC CSS Server
922-TDS-005	SMC CSS Server
922-TDV-005	VATC CSS Server
922-TDP-005	PVC CSS Server
922-TDE-006	EDC Distribution Server (Primary/Secondary)
922-TDG-006	GSFC Distribution Server (Primary/Secondary)
922-TDL-006	LaRC Distribution Server (Primary/Secondary)
922-TDN-006	NSIDC Distribution Server (Primary/Secondary)
922-TDP-006	PVC Distribution Server (Primary/Secondary)
922-TDE-007	EDC FSMS Server
922-TDG-007	GSFC FSMS Server
922-TDL-007	LaRC FSMS Server

922-TDN-007	NSIDC FSMS Server
922-TDV-007	VATC FSMS Server
922-TDP-007	PVC FSMS Server
922-TDE-008	EDC Ingest Server (Primary/Secondary)
922-TDG-008	GSFC Ingest Server (Primary/Secondary)
922-TDL-008	LaRC Ingest Server (Primary/Secondary)
922-TDN-008	NSIDC Ingest Server [retired]
922-TDV-008	VATC Ingest Server (Primary/Secondary)
922-TDP-008	PVC Ingest Server (Primary/Secondary)
922-TDE-009	EDC Interface Server (Primary/Secondary)
922-TDG-009	GSFC Interface Server (Primary/Secondary)
922-TDL-009	LaRC Interface Server (Primary/Secondary)
922-TDN-009	NSIDC Interface Server (Primary/Secondary)
922-TDV-009	VATC Interface Server (Primary/Secondary)
922-TDP-009	PVC Interface Server (Primary/Secondary)
922-TDE-010	EDC MSS Server (Primary/Secondary)
922-TDG-010	GSFC MSS Server [retired]
922-TDL-010	LaRC MSS Server [retired]
922-TDN-010	NSIDC MSS Server [retired]
922-TDS-010	SMC MSS Server [retired]
922-TDV-010	VATC MSS Server [retired]
922-TDP-010	PVC MSS Server [retired]
922-TDE-011	EDC MSS File Server/CM Server
922-TDG-011	GSFC MSS File Server/CM Server
922-TDL-011	LaRC MSS File Server/CM Server

922-TDN-011	NSIDC MSS File Server/CM Server
922-TDS-011	SMC MSS File Server/CM Server
922-TDV-011	VATC MSS File Server/CM Server
922-TDP-011	PVC MSS File Server/CM Server
922-TDE-012	EDC OPS Workstation (Workstation1/Workstation2)
922-TDG-012	GSFC OPS Workstation (Workstation1/Workstation2)
922-TDL-012	LaRC OPS Workstation (Workstation1/Workstation2)
922-TDN-012	NSIDC OPS Workstation (Workstation1/Workstation2)
922-TDV-012	VATC OPS Workstation (Workstation1/Workstation2)
922-TDP-012	PVC OPS Workstation (Workstation1/Workstation2)
922-TDE-013	EDC PDPS DBMS Server
922-TDG-013	GSFC PDPS DBMS Server
922-TDL-013	LaRC PDPS DBMS Server
922-TDN-013	NSIDC PDPS DBMS Server [retired]
922-TDV-013	VATC PDPS DBMS Server
922-TDP-013	PVC PDPS DBMS Server
922-TDE-014	EDC Queuing Server
922-TDG-014	GSFC Queuing Server
922-TDL-014	LaRC Queuing Server
922-TDN-014	NSIDC Queuing Server
922-TDV-014	VATC Queuing Server
922-TDP-014	PVC Queuing Server
922-TDE-015	EDC Science Processor (Processors 1, 2 and 3)
922-TDG-015	GSFC Science Processor (Processors 1, 2 and 3)
922-TDL-015	LaRC Science Processor (Processors 1, 2 and 3)

922-TDN-015	NSIDC Science Processor (Processors 1, 2 and 3)
922-TDV-015	VATC Science Processor (Processors 1, 2 and 3)
922-TDP-015	PVC Science Processor (Processors 1, 2 and 3)
922-TDE-016	EDC Science Data Server (SDSRV) (Primary/Secondary)
922-TDG-016	GSFC Science Data Server (SDSRV) (Primary/Secondary)
922-TDL-016	LaRC Science Data Server (SDSRV) (Primary/Secondary)
922-TDN-016	NSIDC Science Data Server (SDSRV) (Primary/Secondary)
922-TDV-016	VATC Science Data Server (SDSRV) (Primary/Secondary)
922-TDP-016	PVC Science Data Server (SDSRV) (Primary/Secondary)
922-TDE-017	EDC Sybase Staging Server [retired]
922-TDG-017	GSFC Sybase Staging Server [retired]
922-TDL-017	LaRC Sybase Staging Server [retired]
922-TDN-017	NSIDC Sybase Staging Server [retired]
922-TDV-017	VATC Sybase Staging Server [retired]
922-TDE-018	EDC Working Storage Server
922-TDV-018	VATC Working Storage Server
922-TDP-018	PVC Working Storage Server
922-TDL-020	LaRC Science Processor 2
922-TDE-021	EDC AIT Workstation/DBMS Server
922-TDG-021	GSFC AIT Workstation/DBMS Server
922-TDL-021	LaRC AIT Workstation/DBMS Server
922-TDN-021	NSIDC AIT Workstation/DBMS Server
922-TDV-021	VATC AIT Workstation/DBMS Server
922-TDP-021	PVC AIT Workstation/DBMS Server

922-TDE-022	EDC AIT Workstation
922-TDG-022	GSFC AIT Workstation
922-TDL-022	LaRC AIT Workstation
922-TDV-022	VATC AIT Workstation [retired]
922-TDP-022	PVC AIT Workstation [retired]
922-TDE-023	EDC Planning Management Workstation 01/02
922-TDG-023	GSFC Planning Management Workstation 01/02
922-TDL-023	LaRC Planning Management Workstation 01/02
922-TDN-023	NSIDC Planning Management Workstation [retired]
922-TDP-023	PVC Planning Management Workstation 01/02
922-TDE-024	LUT Sybase ASE
922-TDE-025	DEM Science Server
922-TDE-027	EDC Data Spec Workstation 01/02/03
922-TDG-027	GSFC Data Spec Workstation 01/02/03
922-TDL-027	LaRC Data Spec Workstation 01/02/03
922-TDN-027	NSIDC Data Spec Workstation 01/02/03
922-TDP-027	PVC Data Spec Workstation [retired]
922-TDE-028	EDC ACSLS Workstation 01/02/03
922-TDG-028	GSFC ACSLS Workstation 01/02/03
922-TDL-028	LaRC ACSLS Workstation 01/02/03
922-TDN-028	NSIDC ACSLS Workstation 01/02/03
922-TDV-028	VATC ACSLS Workstation 01/02/03
922-TDP-028	PVC ACSLS Workstation 01/02/03

922-TDE-031	EDC Tape System Backup Server
922-TDG-031	GSFC Tape System Backup Server
922-TDL-031	LaRC Tape System Backup Server
922-TDN-031	NSIDC Tape System Backup Server
922-TDS-031	SMC Tape System Backup Server
922-TDV-031	VATC Tape System Backup Server
922-TDP-031	PVC Tape System Backup Server
922-TDE-032	EDC QA Workstation
922-TDG-032	GSFC QA Workstation
922-TDL-032	LaRC QA Workstation
922-TDN-032	NSIDC QA Workstation [retired]
922-TDP-032	PVC QA Workstation
922-TDE-034	EDC AIT Server
922-TDE-035	EDC Disk/RAID Driver
922-TDG-035	GSFC Disk/RAID Driver
922-TDL-035	LaRC Disk/RAID Driver
922-TDN-035	NSIDC Disk/RAID Driver [retired]
922-TDV-035	VATC Disk/RAID Driver
922-TDP-035	PVC Disk/RAID Driver
922-TDG-036	GSFC FSMS Workstation
922-TDE-037	EDC Xterm Server
922-TDL-037	LaRC Xterm Server

922-TDE-038	EDC Landsat 7 Simulator Disk RAID
922-TDG-039	GSFC MODAPS Server Disk RAID
922-TDP-039	PVC MODAPS Server Disk RAID
922-TDP-040	PVC EDOS/LPS Workstation Disk
922-TDP-041	PVC Push Area Workstation Disk
922-TDE-042	EDC Console Manager Disk
922-TDG-042	GSFC Console Manager Disk
922-TDL-042	LaRC Console Manager Disk
922-TDN-042	NSIDC Console Manager Disk
922-TDE-043	EDC PDS Server Disk Partitioning
922-TDG-043	GSFC PDS Server Disk Partitioning
922-TDL-043	LaRC PDS Server Disk Partitioning
922-TDN-043	NSIDC PDS Server Disk Partitioning
922-TDV-043	VATC PDS Server Disk Partitioning
922-TDP-043	PVC PDS Server Disk Partitioning
922-TDE-044	EDC Metadata Server Disk Partitioning
922-TDG-044	GSFC Metadata Server Disk Partitioning
922-TDL-044	LaRC Metadata Server Disk Partitioning
922-TDN-044	NSIDC Metadata Server Disk Partitioning
922-TDP-044	PVC Metadata Server Disk Partitioning
922-TDE-045	EDC Firewall Server Disk Partitioning
922-TDG-045	GSFC Firewall Server Disk Partitioning

922-TDL-045	LaRC Firewall Server Disk Partitioning
922-TDN-045	NSIDC Firewall Server Disk Partitioning
922-TDV-045	VATC Firewall Server Disk Partitioning
922-TDP-045	PVC Firewall Server Disk Partitioning
922-TDE-046	EDC Datapool Server Disk Partitioning
922-TDG-046	GSFC Datapool Server Disk Partitioning
922-TDL-046	LaRC Datapool Server Disk Partitioning
922-TDN-046	NSIDC Datapool Server Disk Partitioning
922-TDP-046	PVC Datapool Server Disk Partitioning
922-TDS-047	SMC FTP Server Partitioning
922-TDS-048	SMC Knowledge Base Server Partitioning
922-TDE-049	EDC Subsetting Host Disk Partitioning

**924 series – Test Configurations**

924-TDE-001	EDC Test Hardware Diagram
924-TDG-001	GSFC Test Hardware Diagram
924-TDL-001	LaRC Test Hardware Diagram
924-TDN-001	NSIDC Test Hardware Diagram
924-TDE-002	EDC Test Environment HW-NW Diagram
924-TDG-002	GSFC Test Environment HW-NW Diagram [retired]
924-TDL-002	LaRC Test Environment HW-NW Diagram
924-TDN-002	NSIDC Test Environment HW-NW Diagram

924-TDE-003 EDC Test IP Address Assignments  
 924-TDG-003 GSFC Test IP Address Assignments  
 924-TDL-003 LaRC Test IP Address Assignments  
 924-TDN-003 NSIDC Test IP Address Assignments

924-TDG-004 GSFC Test Network Hardware

### **2.2.1 Other Related Documents and Documentation**

205-CD-004 Science User's Guide and Operations Procedures Handbook (Release B.0) for the ECS Project  
 311-CD-626 Subscription Server Database Design and Schema Specifications for the ECS Project  
 313-CD-610 Release 6B ECS Internal Interface Control Document for the ECS Project  
 333-CD-605 Release 6A.07 SDP Toolkit User's Guide for the ECS Project  
 611-CD-610 Release 6A Mission Operations Procedures for the ECS Project, Section 3.2  
 625-CD-604 ECS Project Training Material Volume 4: System Administration (System Startup and Shutdown section)  
 193-801-SD4 PGS Toolkit Requirements Specification for the ECS Project (a.k.a. GSFC 423-16-02)  
 193-WP-118 Algorithm Integration and Test Issues, White Paper for the ECS Project  
 194-WP-925 Science Software Integration and Test White Paper for the ECS Project  
 423-16-01 Data Production Software and Science Computing Facility (SCF) Standards and Guidelines  
 423-42-06 Interface Control Definition for the EOS Data Gateway (EDG): Messages and Development Data Dictionary V0 and ASTER/ECS Message Passing Protocol Specification  
 COTS XRP-II Manual  
 RFC 793 Transmission Control Protocol  
 RFC 768 User Datagram Protocol  
 RFC 791 Internet Protocol

## 2.3 Information Documents Not Referenced

The documents listed below, while not directly applicable, help in the maintenance of the delivered software.

423-41-02	Goddard Space Flight Center, Functional and Performance Requirements Specification for the Earth Observing System Data and Information System Core System
423-41-03	EOSDIS Core System Contract Data Requirements Document
230-TP-002	Interface Control Document Between the ECS and the Product Distribution System Information Server (PDSIS)
423-35-01	ICD between EMSn and ECS Elements [not baselined by GSFC to date]
423-35-02	ICD between EMSn and Non-EOSDIS Core Systems
423-35-03	ICD between EMSn and NASA Institutional Support Systems
423-36-01	ICD between EMSn and ICESat SIPS
505-41-21	ICD between ECS and NASA Institutional Support System (NISS)
505-41-30	ICD between ECS and Version 0 System for Interoperability
505-41-34	ICD between ECS and ASTER Ground Data System
505-41-38	ICD between ECS and EOS-AM Project for AM-1 Spacecraft Analysis System
505-41-40	ICD between ECS and the GSFC DAAC
540-032	ICD between EMSn and DAACS
423-41-57-1	ICD between ECS and SIPS, Volume 1: ECS ACRIM III SIPS Data Flows
423-41-57-2	ICD between ECS and SIPS, Volume 2 SAGE III SCF Data Flows
423-41-57-3	ICD between ECS and SIPS, Volume 3 ASTER OSF
423-41-57-4	ICD between ECS and SIPS, Volume 4 ASTER DEM
423-41-57-5	ICD between ECS and SIPS, Volume 5 MOPITT Data Flows
423-41-57-6	ICD between ECS and SIPS, Volume 6 MODIS (MODAPS) [not baselined by GSFC to date]

423-41-57-7	ICD between ECS and SIPS, Volume 7 ASMR-E
423-41-57-8	ICD between ECS and SIPS, Volume 8 MLS Data Flows
423-41-57-9	ICD between ECS and SIPS, Volume 9 MTMGW
423-41-57-10	ICD between ECS and SIPS, Volume 10, TES Data Flows
423-41-57-11	ICD between ECS and SIPS, Volume 11, ICESat Data Flows
423-41-57-12	ICD between ECS and SIPS, Volume 12, HIRDLS
423-41-57-13	ICD between ECS and SIPS, Volume 13, OMI [not baselined by GSFC to date]
423-41-57-14	ICD between ECS and SIPS, Volume 14, SORCE [not baselined by GSFC to date]
423-41-58	ICD between the ECS and EDC
505-41-32	ICD between ECS and Landsat 7 System
423-ICD-EDOS/EGS	ICD between EDOS and EGS
423-EDOS-0211.0001R2	Interface Requirements Document between EDOS and EGS Elements

## 2.4 ECS Tool Descriptions

### 2.4.1 Discover

Discover is an information system for software engineering that transforms a code base into a tangible asset by enabling a software engineer's code comprehension, analysis of impact to code, and automated support of metrics collection. Discover starts with the creation of an Information Model, a highly associative database. The Information Model stores and tracks every entity, attribute and relationship between software objects. The Discover products do leverage off the Information Model to provide a variety of graphical and narrative development, engineering analysis, and quality assessment tools. The use of Discover on the ECS Program has been customized to take advantage of a selected set of Discover tools. However, the broad spectrum of tools is available for the more experienced user to use. The major activities provided for use by the user are:

1. Basic Navigation and Query – How to navigate in the Discover environment, taking advantage of the query mechanisms provided by the Discover Browser.
2. Results Collection – How to make query results logical groupings (groups) to assist in better understanding and management of system components.
3. Graphical Representations – How to use the graphical views to understand the relationships of code, which include:

Call Trees – Header file or function calling relationships

Outline – Representation of the code Structure

Flowchart – Overview of the program flow, which also depicts complexity

Class Inheritance Diagrams – Shows class hierarchy according to a particular class

Entity Relationship Diagram (ERD) – A methodology independent representation of the relationships between C++ classes similar to object diagrams

Graphs – Shows the possible paths between two functions.

4. Impact Analysis – How to use the ECS customized “Modified Entities Report” which is a single push button action to determine what has been changed, the extent of the change, and the quality of the change made by a software engineer.

Detailed instructions for the use of the Discover tool are provided in the Discover User Training Version 5.1 slide presentation.

## **2.4.2 ABC++**

ABC++ is a program that creates on-line and hard copy documentation for C, C++, and Java programs by analyzing the source and header files. It is "piggybacked" onto the C++ and Java compilers, librarian programs, and linker such that in the process of building all of the components of a project, documentation pages are automatically generated.

For C++, an HTML documentation page is generated for each source file, which is compiled. A documentation page is generated for each header file included either directly or indirectly by the compilation. If one or more source files are compiled, which implement a header file previously compiled, a combined module documentation page is generated which indicates the header and all sources that implement it. For Java, a documentation page is generated for each Java module compiled and for each Java module imported directly or indirectly by an explicitly compiled module.

For each module documented, the classes, functions, variables, constants, templates, and macros are catalogued, forming a reference manual by which the various components may be located easily by Hyperlinks. Comments, extracted from the code are associated with each declaration.

For each library or program built, an HTML documentation page is generated listing all the classes, functions, variables, etc., which are globally accessible. For each program, a list of libraries linked is generated. Along with each of these names, the first sentence of the comments on the various components is also displayed. A description of the program or library is obtained, if available, from a text file called lib\_<libraryName> or prg\_<programName> located in the directory the program or library is built.

After all modules have been compiled, a set of directories is generated in HTML, locating all modules and their global internal components, and describing each of these items with the first sentence from their descriptions. A description of any given directory is obtained, if available from a file called "index.txt" in that directory.

Hard copy (in RTF, which is compatible with MS-Word) may be extracted as desired from the various documentation pages. For the purposes of this document, this is limited to the indexes of classes and templates in each library plus the list of non-COTS libraries linked for each program.

An HTML representation of every source and header file is also generated such that every user-defined name, every overloaded operator, every "include", and every import is linked to its definition. This makes it possible to browse everywhere in the project. Hyperlinks from the documentation pages to the source/header pages allow one to jump directly into the code in order to understand it if the comments in the code do not explain it well enough.

A complete cross-reference is generated in the process of building these pages. The user can obtain a list of Hyperlinks locating every reference to a particular overload of a name or function anywhere in the entire project.

A search engine makes it possible to find items by name or comment phrase using wild cards and other options (e.g., case insensitive, limited to a certain page, or search by sub-directory by subsystem).

The on-line ECS documentation can be accessed with Netscape at the following URL (for the time being anyway):

<http://abc.hitc.com:8080/ecs/>

A link to the above page called ABC++ ECS Documentation is also given on the Internal Server Page as:

<http://dmsserver.gsfc.nasa.gov/>

that can be accessed from the ECS Data Handling System (EDHS):

<http://edhs1.gsfc.nasa.gov/>

### **2.4.3 Rational Rose**

The Rational Rose tool provides support for object-oriented analysis and design. In particular, the Rose tool provides support for controlled-iterative or component-based development. The Rose tool is used on the ECS Project to document the object-oriented elements of the design using class diagrams, use-case diagrams, interaction diagrams, component diagrams, and object diagrams. The Unified Modeling Language (UML) is the methodology used on the ECS Project for all design activities (although the Rose tool also supports the Booch '93 Methodology or the Object Modeling Technique (OMT) as well).

The Rose tool can also be used to reverse engineer code developed that lacks supporting documentation to get as-built object diagrams.

Before using the Rational Rose tool, see "Rational Rose 98, Using Rose" for important tool usage and reference information. In addition, the following references can be obtained and used:

- (1) "Unified Method for Object-Oriented Development," by Grady Booch and Jim Rumbaugh (version 1.1, Rational Software Corporation) for an introduction to the respective method's notation, semantics, and process for object-oriented analysis and design.
- (2) the second edition of "Object-Oriented Analysis and Design with Applications" by Grady Booch, (Benjamin/Cummings, 1994)

- (3) "Object-Oriented Modeling and Design" by James Rumbaugh, Michael Blaha, William Premerlani, Frederick Eddy and William Lorensen, (Prentice-Hall, 1991)
- (4) "UML Distilled: Applying the Standard Object Modeling Language" by Martin Fowler with Kendall Scott, Foreword by Grady Booch, Ivar Jacobson, and James Rumbaugh (Addison Wesley Longman, Inc., 1997)

#### **2.4.4 Clearcase Baseline Manager Configuration Management Tool**

ClearCase Baseline Manager (CBLM) consists of the ECS baseline data that it manages and the Graphical User Interface (GUI) used to manipulate the ECS baseline data.

The data comes from three sources:

- 1) Existing XRP-II data
- 2) Existing Release Notes (914-TDA-xxx) Machines Impacted data
- 3) Existing CCR data

The import of the XRP data into ClearCase was performed in several steps. First, the hardware document, 910-TDA-003, was copied as a text file. Each of the items contained within this report is identified with a Control Item Identifier (CID). This is an 8-digit integer with a "b" prefix (e.g., b00083456). Each COTS S/W product has its own CID. Because CIDs are mapped to ECS hosts, it was decided to represent information within ClearCase as elements. Each CID is then a ClearCase element. For the ClearCase CID format, the comma separated variable (CSV) format was chosen, as this format is easily ported into and from other COTS S/W products, specifically Microsoft Access and Excel.

The ClearCase configuration specification chosen was the simplest, or the default configuration specification. A view, CM\_MASTER, was created with the default configuration specification to manage the data records. The CID records (checked in ClearCase elements) are located in the /ecs/cm VOB at /ecs/cm/CIDs. This directory currently contains the 256 records that correlate to XRP-II's COTS S/W CIDs.

Another important data construct within CBLM is the notion of the Machines Impacted file, and a CCR identified construct, which maps CIDs to hosts. Each Configuration Change Request (CCR) affecting the baseline contains information about 1 or more CIDs. Also, the CCR contains information regarding the hosts receiving the COTS S/W (CID). So the CCR has a construct that in its simplest form is one "CID\_MAP" file, and one Machines Impacted (MI) file. The "CID\_MAP" file is a simple lookup table. In this case, there is only one entry. The entry contains first a valid CID, followed by one or more blanks, then the name of the "MI" file. In this case, the MI filename is "MI." The MI file, contains a list of valid ECS hosts having the COTS S/W identified within the CID. So a CCR (03-1234) to place a COTS S/W (e.g., Acrobat Reader), onto host e0acs03, would have an MI file containing one host, e0acs03, and one CID\_MAP. If the Acrobat Reader software is CID b00081234, the CID\_MAP file would contain:

```
"b00081234  MI"
```

And the MI file contains:

“e0acs03”

The CCR would be found at:

/ecs/cm/CM/2003CCRs/1234/, a directory

Under this directory is found the two files, “CID\_MAP” and “MI.” Note that there is always only one CID\_MAP file for each CCR, but that the CID\_MAP can contain more than one line. The simplest example of this is when a COTS S/W product needs to be mapped to both SGI and Sun hosts. Then there would be two MI files, “MI\_SGIs” and “MI\_Suns”, for example. The CID\_MAP would contain two entries, one mapping the SGI hosts to the SGI CID, and the other mapping the Sun hosts to the Sun CID.

As CCRs are required to change the CBLM data state, the effectivity date is then defined as the CCR approval date. This is the date the change becomes valid. The next construct, named the “Sequencer”, is the table providing the basis for change. It has a temporal component; the last approved CCR is at the end of the table. As new CCRs get approved, they simply get concatenated to the end of the list in time order. The Sequencer is an executable script.

The last construct is the “dartboard.” Conceptually, the “dartboard” is a directory within ClearCase, at /ecs/cm/BLM/dartboard/. All ECS hosts are listed as files in the /dartboard/ directory. In conclusion, then data constructs are:

CIDs

CCR directories

CID\_MAPs and MIs under the CCR directories

Sequencer

Dartboard

The way these pieces all work together is now discussed.

When a CCR is approved that affects the baseline, a CCR is checked out. The /ecs/cm/CIDs/ ClearCase directory is checked out. The new CID is created and populated with the information present on the CCR form. The new CID number then has a ClearCase element created, and the first version becomes this new CID. The /ecs/cm/CIDs/ directory is then checked back in. Next, the MI file must be prepared. Within the CCR directory, two new files are “made” (cleartool mkelem -eltype text\_file -nc CID\_MAP MI). The hosts, which are to get the COTS S/W, are entered into the MI file, then the file is checked in as the first version. Next, the CID\_MAP file is created, mapping the new CID number to the MI file. The CID\_MAP file is checked in, then the CCR file is checked back in. This work gets the CCR information locked into ClearCase.

Next, the Sequencer file is edited to show the new CCR number at the end. This action allows the CCR’s MI and CID\_MAP files to overlay onto the ClearCase baseline. This is accomplished by echoing the contents of the CID (in file /ecs/cm/CIDs/b00083123) onto each of the hosts

specified with the `/ecs/cm/CM/2003CCRs/1234/MI` file. This data is written to the hosts files with the dartboard, located at `/ecs/cm/BLM/dartboard`.

Once the data has been applied to the dartboard, subsequent scripts then produce the output reports. In conjunction with the current hosts list, the scripts obtain all of the valid hosts of the site, and basically reformat the data within the dartboard files into reports, which are XRP like in format. Information was added to the reports, including the CCR number, related Release Notes documentation, and the CCR approval date.

The reports are written to the `/ecs/cm/BLM/reports` directory. Subsequent “Expect” scripts then ftp those reports to specific locations on the EBIS server, Pete, and then are transmitted over to the public server, cmdm.

The languages used in this tool are “csh”, “expect”, and C. Also, “.grp” files are used to enable the ClearCase GUIs. These files are text files that are dynamically generated at the time that the GUI is launched. Code has been reused from two sources, the DeliveryTool, which is used to prepare and send data to the sites, and the cmdm\_replication scripts, which are used to replicate data from the Landover EBIS server Pete, to the public (DAAC, ESDIS) server, cmdm.east.hitc.com.

This page intentionally left blank.

## 3. System Description

---

### 3.1 Mission and Release 6B Objectives

The Mission of the National Aeronautics and Space Administration's Earth Science Enterprise is to develop a scientific understanding of the total Earth System and its response to natural or human-induced changes to the global environment to enable improved prediction capability for climate, weather and natural hazards. The vantage point of space provides information about Earth's land, atmosphere, ice, oceans and biota that is obtained in no other way. Programs of the enterprise study the interactions among these components to advance the new discipline of Earth System Science, with a near-term emphasis on global climate change. The research results contribute to the development of sound environmental policy and economic investment decisions.

The Earth Observing System Data and Information System (EOSDIS) Core System (ECS) has been designated as the ground system to collect, archive, produce higher-level data products and distribute data for the Earth System Science mission.

#### 3.1.1 Release 6B Capabilities

The ECS capabilities have been developed in increments called formal releases. Release6B, which is managed by Configuration Management, is not a formal release. It is a collection of new and updated capabilities provided to the users of the system and is described here to show the progress of system enhancements. The ECS collects and stores, processes, archives and distributes scientific data from six different platforms (satellites). In the following sub-sections, the platforms and instruments from which scientific data is collected are identified, the type of data ingested and archived is presented, search and order capabilities for scientific data, how data is distributed and processed, system architecture and operation, system security and Distributed Active Archive Center (DAAC) and external system support are described. Other capabilities provided by Release 6B include processing the data obtained, distributing raw or processed data as requested, quality assurance of processed data, supporting communication networks, and systems monitoring via interfaces with the ECS operations staff.

##### 3.1.1.1 ECS Support of Instruments by Platform

- The Meteor 3 platform supports the Stratospheric Aerosols and Gas Experiment III (SAGE III) instrument
- The Landsat 7 platform supports the Enhanced Thematic Mapper Plus (ETM+) instrument
- The ACRIMSAT platform supports the ACRIM III experiment
- The Terra (AM-1) platform supports the Advanced Spaceborne Thermal Emission and Reflection Radiometer (ASTER), Multi-Angle Imaging SpectroRadiometer (MISR),

Moderate Resolution Imaging SpectroRadiometer (MODIS) and Measurements of Pollution in the Troposphere (MOPITT) instruments

- The Aqua (PM-1) platform supports the Moderate Resolution Imaging SpectroRadiometer (MODIS), Atmospheric Infrared Sounder (AIRS), Advanced Microwave Scanning Radiometer (AMSR), Humidity Sounder for Brazil (HSB) and Advanced Microwave Sounding Unit (AMSU) instruments
- The Ice, Cloud and Land Elevation satellite (ICESat) platform supports the Geoscience Laser Altimeter System (GLAS) instrument
- The Solar Radiation and Climate Experiment (SORCE) platform supports the Total Irradiance Monitor (TIM), Solar Stella Irradiance Comparison Experiment (SOLSTICE), Spectral Irradiance Monitor (SIM) and XUV Photometer System (XPS) instruments
- The AURA platform supports the High-Resolution Dynamics Limb Sounder (HIRDLS), Microwave Limb Sounder (MLS), Ozone Monitoring Instrument (OMI) and Tropospheric Emission Spectrometer (TES) instruments

### **3.1.1.2 Ingest and Archive Capabilities**

The following data is ingested and archived in the ECS from the various instruments described in section 3.1.1.1:

- Ingest of browse and metadata from Landsat 7 International Ground Station (IGS) tapes
- Ingest of science and engineering data from the EOS Data and Operations System (EDOS)
- Ingest of Landsat 7 Level 0 Reformatted (L0R) data from the Landsat 7 Archive Management System (LAMS)
- Ingest of Product Generation Executable (PGE) software from Science Computing Facilities (SCFs) either electronically or via media tape
- Ingest of ASTER Level 1A/1B data from the ASTER GDS
- Ingest of FDS (formerly FDD) orbit data via polling without DR
- Ingest of SAGE III MOC Level 0 data into the Science Data Server
- Ingest of SAGE III SCF higher-level products into the Science Data Server via the SIPS interface
- Ingest of Data Assimilation System (DAS) HDF-EOS data via standard polling with DR
- Ingest of MODIS higher-level products via the SIPS Interface after the MODIS L1A, L1B and ancillary data are provided to the MODAPS SCF from the ECS archive and processed by the MODAPS SCF
- Ingest of MOPITT SCF Level 0 data via the SIPS interface
- Ingest of SDPS resident data across a mode in the same DAAC or across DAACs

- Ingest of ASTER DEM granules (HDF-EOS data and metadata) into the Science Data Server via the SIPS interface
- Ingest of ACRIM Level 0 and higher-level data from the ACRIM SCF via the SIPS interface
- Ingest of higher-level AMSR data products from the AMSR SCF
- Ingest of SORCE Level 0 data from the SORCE Team via the SIPS interface
- Archive of ICESat GLAS Level 1, Level 2 and Level 3 and ancillary data at the NSIDC DAAC
- Archive of SORCE TIM/SOLSTICE/SIM/XPS Level 3 and Level 4 data at the GSFC DAAC
- Archive of OMI Level 3 and Level 4 data at the GSFC DAAC
- Archive of HIRDLS, TES, MLS Level 1, Level 2 and Level 3 data at the GSFC DAAC
- Archive of products previously processed and archived
- Archive of Science Software I&T packages

### **3.1.1.3 Search and Order Capabilities**

The ECS provides the following capabilities for search and ordering of data from the archive:

- Machine-to-Machine Gateway support between SIPS and ECS for data orders
- Directory and inventory search, including a user browse capability via the Version Zero (V0) System user interface
- Provide access to non-science data collections by a limited number of attributes and values
- V0 Gateway support for client requests for searches based on full ECS core metadata and product specific attributes, Landsat 7 floating scenes, and band subsetting, and Landsat 7 data billing information
- Support for data retrieval and distribution of a subset of a Landsat 7 granules as selected by floating scenes and/or individual bands
- Tracking Landsat 7 order processing status via the System Management Subsystem (MSS)
- Configurable parameters to control the number of granules returned from a single search request
- Handling of variations on search areas and product-specific spatial representations
- Managing of orders via the V0 Gateway from the EOS Data Gateway (EDG), ECS Clearing House (ECHO), Ground Data System (GDS) and the orders submitted by the Spatial Subscription Server (SSS)
- The SSS provides an operator the interface to place standing orders (subscriptions) based on an ECS event and manage subscription status

- The Data Pool provides an operator the interface to manage insert processes, queues, collection groups and collection themes for ECS and non-ECS collections

#### **3.1.1.4 Data Distribution Capabilities**

The ECS provides the following Data Distribution capabilities for users:

- Data distribution via Sony DTF Tape (previously used D3 tapes for data distribution)
- Product Distribution System (PDS) integrated into the ECS for hard media product distribution requests
- Support writing files to CD-ROMs and Digital Linear Tape drives for distribution
- Support File Transfer Protocol (FTP) Push or Pull Subscriptions for users
- Support distributing science data products via FTP and 8mm tape (**Note:** 8MM can only be obtained via the V0 Gateway and routed to the PDS for Release. 8mm cannot be selected via the ODFRM or the Subscription Server.)

#### **3.1.1.5 Data Processing Capabilities**

The ECS provides the following capabilities for user/operator data processing options:

- Support the regeneration and archive of products previously produced and archived
- Provide capability for operator deletion of granules
- Allow users to request a data processing request associated with a DAR at the time of submittal
- Support Quality Assurance (QA) processing of Terra (AM-1) science data products
- Provide operator interfaces for production and resource planning
- Support submission of Data Acquisition Requests (DARs) for data collection by the ASTER instrument aboard the Terra (AM-1) spacecraft
- Support to submit on-demand requests to the ASTER GDS for the generation of Level 1B products
- Support for five new production rules required for Aqua (PM-1)
- Automated support for on-demand requests for ASTER processing
- Support of production rules to allow multiple Level 0 granules as input into a single PGE
- Support of production rules for most recent granule and optional DPRs
- Processing of orbit, attitude, and ephemeris data into toolkit native format and HDF
- Production rules for the closest granule, the spatial pad, and orbit processing of run time parameters

- Provide capability to associate the ASTER browse granule for the L1A product with the ASTER L1B and DEM products

### **3.1.1.6 System Operation and Architecture**

The ECS provides the following capabilities to support the system operations and processing architecture used to provide data and services for users:

- Sockets have replaced the Distributed Computing Environment (DCE) COTS SW as interface support throughout the system
- Provide Science Data Server scalability/operability improvements
- Provide capability for operator deletion of granules, their associated metadata and browse files
- Provide the associated communications network interfaces with the SCFs
- Provide operator interfaces for production and resource planning
- Support interfacing with the Advanced Space-borne Thermal Emission and Reflection Radiometer (ASTER) Ground Data System (GDS) for the submission of Data Acquisition Requests (DARs) for data collection by the ASTER instrument aboard the Terra (AM-1) spacecraft
- Support managing the startup and shutdown of system network components, user registration and profile administration, database and archive administration, system data and file back-up and restores, system performance tuning and resource usage monitoring, and other routine operator duties
- Support of DAR submittals and DAR query status between the ECS Java DAR Tool and the ASTER GDS via the MOJO Gateway
- Support the display of browse data as a result of a single user request from the search results screen
- Operations support to update certain ESDT attributes without requiring the deletion of the data collection
- Provide ESDTs to support MODIS, AIRS, and AMSR on Aqua (PM-1)
- Provide ESDTs to support TIM, SOLSTICE, SIM, XPS on SORCE
- Provide spatial container changes for ASTER L1A/L1B from bounded rectangle to gpolygon
- Provide Science Software Integration and Test (SSI&T) support for Aqua (PM-1) (AIRS and MODIS)
- Provide the capability for editing of ECS core attribute values
- Support the consolidation of trouble tickets using the Remedy Tool
- Provide fault recovery for mode management

- Provide the capability for startup and shutdown of an entire mode
- Provide the capability for the deletion of science data from the archive without deleting the corresponding metadata
- Provide the capability for the installation of ESDTs to insert and acquire archived data without the archive storage directory names
- Provide the capability for the persistence of asynchronous acquire requests, which do not have callback functions
- Provide for the storage of event information into the SDSRV database instead of flat files
- Provide the capability for the monitoring of the usage of memory by the Science Data Server
- Provide COTS packages to allow operations to generate customized reports from ECS databases
- Provide a single configuration registry database to replace the numerous ECS application configuration files
- Provide for the insertion of ECS and non-ECS granules into the Data Pool

#### **3.1.1.7 Security**

The ECS provides the following capabilities for system security:

- Encryption of the subscription server FTP password in the Science Data Server database
- User authorization checks to restrict data set access at the granule level based on data quality information
- SDP Toolkit support for thread safe concurrent processing by the science software
- Secure Transfer of data files from Data Providers upon request
- System data and file backups and restores

#### **3.1.1.8 DAAC/External System Support**

ECS Release 6B has been distributed to five site locations including:

1. The System Management Center (SMC), located at the Goddard Space Flight Center (GSFC),
2. The DAAC at GSFC,
3. The DAAC at the Langley Research Center (LaRC),
4. The DAAC at the Earth Resource Observation System (EROS) Data Center (EDC), and
5. The DAAC at the National Snow and Ice Center (NSIDC)

The ECS Release 6B communications network includes the National Aeronautics and Space Administration (NASA) Science Internet (NSI) and the EOSDIS Mission Support Network (EMSn). These portions of the network are physically located at the SMC and at the DAAC sites. The communications network connects ECS to data providers at the EDOS, the Landsat 7 Archive Management System (LAMS), NOAA Affiliated Data Center (ADC), and the EOSDIS Version 0 system.

The data users for Release 6B are the science user community connected to the four DAACs, the SCFs, and the ASTER GDS.

1. SMC Support:

- SMC capabilities include overall ECS system performance monitoring, coordinating, and setting system-wide policies and priorities

2. GSFC Support:

- AIRS/HSB/AMSU instrument data including the receipt of AIRS/HSB/AMSU Level 0 data and the GSFC archive, production, and distribution of Levels 1, 2 and 3 data and data products
- ECS Release 6B provides communications network interfaces to support the Data Assimilation Office (DAO) in the receipt, archive, and distribution of data from NOAA's National Centers for Environmental Prediction (NCEP) and Terra instruments. This includes the ingest of NCEP Levels 1-3 data sets and the archive, production, and distribution of ECS Level 4 data by GSFC
- The HIRDLS SIPS regularly receives HIRDLS Level 0 data from the GSFC DAAC via an ECS subscription. The Level 0 data is processed into Level 1, 2 and 3 data at the HIRDLS SIPS, and then transferred to the GSFC DAAC via the ECS-SIPS interface. The GSFC DAAC archives all HIRDLS standard data products and provides distribution services for the data
- The MLS SIPS regularly receives MLS Level 0 data from the GSFC DAAC via an ECS subscription. The Level 0 data is processed into Level 1, 2 and 3 data at the MLS SIPS, and then transferred to the GSFC DAAC via the ECS-SIPS interface. The GSFC DAAC archives all MLS standard data products and provides distribution services for the data
- OSIPS receives OMI Level 0 data from the GSFC DAAC via an ECS subscription. The Level 0 data is processed into Level 1, 2 and 3 data at the OSIPS. The OSIPS transfers the Level 1, 2 and 3 data to the GSFC DAAC for archival and distribution
- TIM/SOLSTICE/SIM/XPS instrument data including the receipt of TIM/SOLSTICE/SIM/XPS Level 0 data and the GSFC archive, production and distribution of Level 3 and Level 4 data and data products

- GSFC DAAC capabilities include:
  - Ingest of MODIS, AIRS, HSB and AMSU Level 0 data and related ancillary data
  - Production, archival and distribution of the level 1A and 1B including the distribution of the level 1A, 1B and ancillary data to MODAPS for higher-level processing
  - Receipt of higher-level MODIS atmospheric and ocean products from MODAPS, via the SIPS interface, for archival and distribution
  - Production, archival, and distribution of the higher-level products for AIRS/HSB/AMSU data
  - Production, archival and distribution of the higher-level products for TIM/SOLSTICE/SIM/XPS data

### 3. LaRC Support:

- ECS Release 6B provides a communications network and data/information management support for MISR instrument data including the receipt of MISR level 0 data and the LaRC archive, production, and distribution of levels 1, 2 and 3 data and data products
- ECS Release 6B provides a communications network and data/information management support for MOPITT instrument data including the receipt of MOPITT level 0 data, and the LaRC archive, production, and distribution of levels 1, 2 and 3 data
- LaRC DAAC capabilities include:
  - Ingest of MISR and MOPITT Level 0 and related ancillary data
  - Production, archival, and distribution of the higher-level products for MISR
  - Receipt of higher-level MOPITT products from the MOPITT SCF, via the SIPS interface, for archival and distribution
  - Receipt of SAGE III Level 0 from the SAGE III MOC and the distribution of this data to the SAGE III SCF for processing
  - Receipt of higher-level SAGE III products from the SCF, via the SIPS interface, for archival and distribution
  - Receipt of ACRIM products (Level 0, ancillary data and Level 2 results) from the SCFs, via the SIPS interface, for archival and distribution
  - Receipt of TES Level 1, 2, and 3 data including algorithm and associated software packages, metadata, production histories, ancillary data and Quality Assessment (QA) data for archival and distribution

#### 4. EDC Support:

- ECS Release 6B provides a communications network and data/information management support for ASTER instrument data including the receipt of ASTER level 1 data on magnetic tape at EDC from Japan, and the production and distribution of higher level ASTER products by EDC
- EDC DAAC capabilities include:
  - Ingest of ASTER Level 1A/1B and Landsat 7 Level 0R data, with ancillary data needed for production
  - Production, archival and distribution of ASTER products
  - Archival and distribution of Landsat 7 Level 0R data
  - Receipt of higher level MODIS land products from MODAPS, via the SIPS interface, for archival and distribution

#### 5. NSIDC Support:

- AMSR-E instrument data including the receipt of level 0 data from EDOS at ECS, and the NSIDC archive and distribution of levels 1, 2 and 3 data. The Level 1A data is received from the NSIDC V0 DAAC while the level 2 and 3 data is received from the AMSR-E SCF via the SIPS interface
- ECS Release 6B supports the ingest of ICESat GLAS level 1, level 2, level 3 and ancillary input data for archive and distribution at the NSIDC DAAC using the standard SIPS interface. The ECS also archives GLAS level 0 data received from EDOS
- NSIDC DAAC capabilities include:
  - Receipt of higher-level MODIS snow and ice products from MODAPS, via the SIPS interface, for archival and distribution
  - Ingest of AMSR-E Level 0 data and related ancillary data
  - Receipt of the AMSR-E higher-level products via the SIPS interface, for archival and distribution
  - Ingest of GLAS Level 0 data and related ancillary data
  - Distribution of GLAS Level 0 to the SCF for higher-level processing
  - Receipt of the GLAS higher level products from the SCF, via the SIPS interface, for archival and distribution

#### 6. SCF Support:

- During the initial period after launch, the MOPITT higher-level products are generated at the SCF and provided to the ECS via the SIPS interface

- ECS Release 6B supports receiving SAGE III Level 0 data from the SAGE III MOC, provides the level 0 data to the SAGE III SCF, and receives higher level products from the SCF via the SIPS interface
- ECS Release 6B supports receiving ACRIM L0 data and higher level products from the SCF via the SIPS interface

#### 7. Landsat 7 Support:

- ECS Release 6B provides a repository for Landsat 7 L0R (L0 reformatted) data. The ECS communications network includes interfaces with the Landsat 7 system elements, the Mission Management Office (MMO), and the Ground Data Processing System (GDPS). The GDPS is composed of the Landsat 7 Archive Management System (LAMS), Landsat 7 International Ground Stations (IGSs) and the Image Assessment System (IAS)
- The ECS network interfaces are needed to receive product cost information, exchange of registration services, and system management status from the MMO. The ECS receives and stores Landsat 7 level 0R data, metadata, and browse data from the LAMS. The ECS also receives calibration data and metadata from the IAS. ECS network interfaces for data search, data order, and data distribution services to Landsat 7 users are also provided in Release 6B
- ECS support for the Landsat 7 science data is collocated with the Landsat 7 Ground System at EDC. ECS at the Land Processes Distributed Active Archive Center (LP DAAC), located at EDC, provides: ingest of and long-term storage for Landsat 7 image data sets and calibration parameter files; EOSDIS user access to Landsat 7 browse images and a catalog of archived Landsat 7 data for data search and product order; science data subsetting and distribution of products in response to orders

#### 8. MODAPS Support

- ECS Release 6B provides a communications network and data/information management support for MODIS instrument data including level 0 data: archive, production, and distribution of levels 1A and 1B including distribution of the 1A and 1B data to the MODIS Data Processing System (MODAPS) for higher-level processing. The receiving of higher-level MODIS products from MODAPS via the SIPS interface is also supported

### **3.2 Release 6B Architecture Overview**

The ECS Release 6B architecture comprises the logical items listed here. Commercial Off The Shelf (COTS) software and hardware are used, to the extent possible, to implement the ECS functionality of these logical items.

- System
- Segments

- Subsystems
- Computer software configuration items (CSCIs)
- Computer software components (CSCs)
- Processes

ECS Release 6B was built of the following two segments.

- CSMS – Communications and Systems Management Segment
- SDPS – Science Data Processing Segment

Each segment was in turn built of the following subsystems.

- CSMS: CSS - Communications Subsystem  
ISS - Internetworking Subsystem  
MSS - System Management Subsystem
- SDPS: CLS - Client Subsystem  
DMS - Data Management Subsystem  
DSS - Data Server Subsystem  
PLS - Planning Subsystem  
DPS - Data Processing Subsystem  
INS - Ingest Subsystem  
OMS – Order Management Subsystem  
PDS – Product Distribution System Subsystem

### **Hierarchical Definitions**


System: A stand-alone composite of hardware, facilities, material, software, services, and personnel required for operation based upon a defined set of system level requirements and designed as a related set of capabilities and procedures.

Segment: A logical and functional subset of related capabilities, implemented with COTS hardware and COTS and custom developed software to satisfy a defined subset of the system level requirements.

Subsystem: A logical subset of Segment related capabilities, implemented with COTS hardware and COTS and custom developed software to satisfy a defined subset of segment level requirements.

- CSCI: A logical subset of Subsystem related capabilities, implemented with COTS and custom developed software to satisfy a defined subset of the subsystem level software requirements.
- CSC: A logical subset of CSCI related capabilities, implemented with COTS and custom developed software to satisfy a defined subset of the CSCI level software requirements.
- Process: A logical and functional set of software, written in a specific order and in a defined manageable size to manipulate data as part of a product-generating algorithm. A process is a separately compiled executable (i.e., binary image). A process can use infrastructure library calls, system service calls, COTS service calls, and application programming interfaces to manipulate data to generate products.

Figure 3.2-1 is a hierarchical software diagram. The hierarchical software diagram depicts an example of the decomposition levels used in the ECS design and described in this document. The diagram is also a graphical representation of the terms just described.

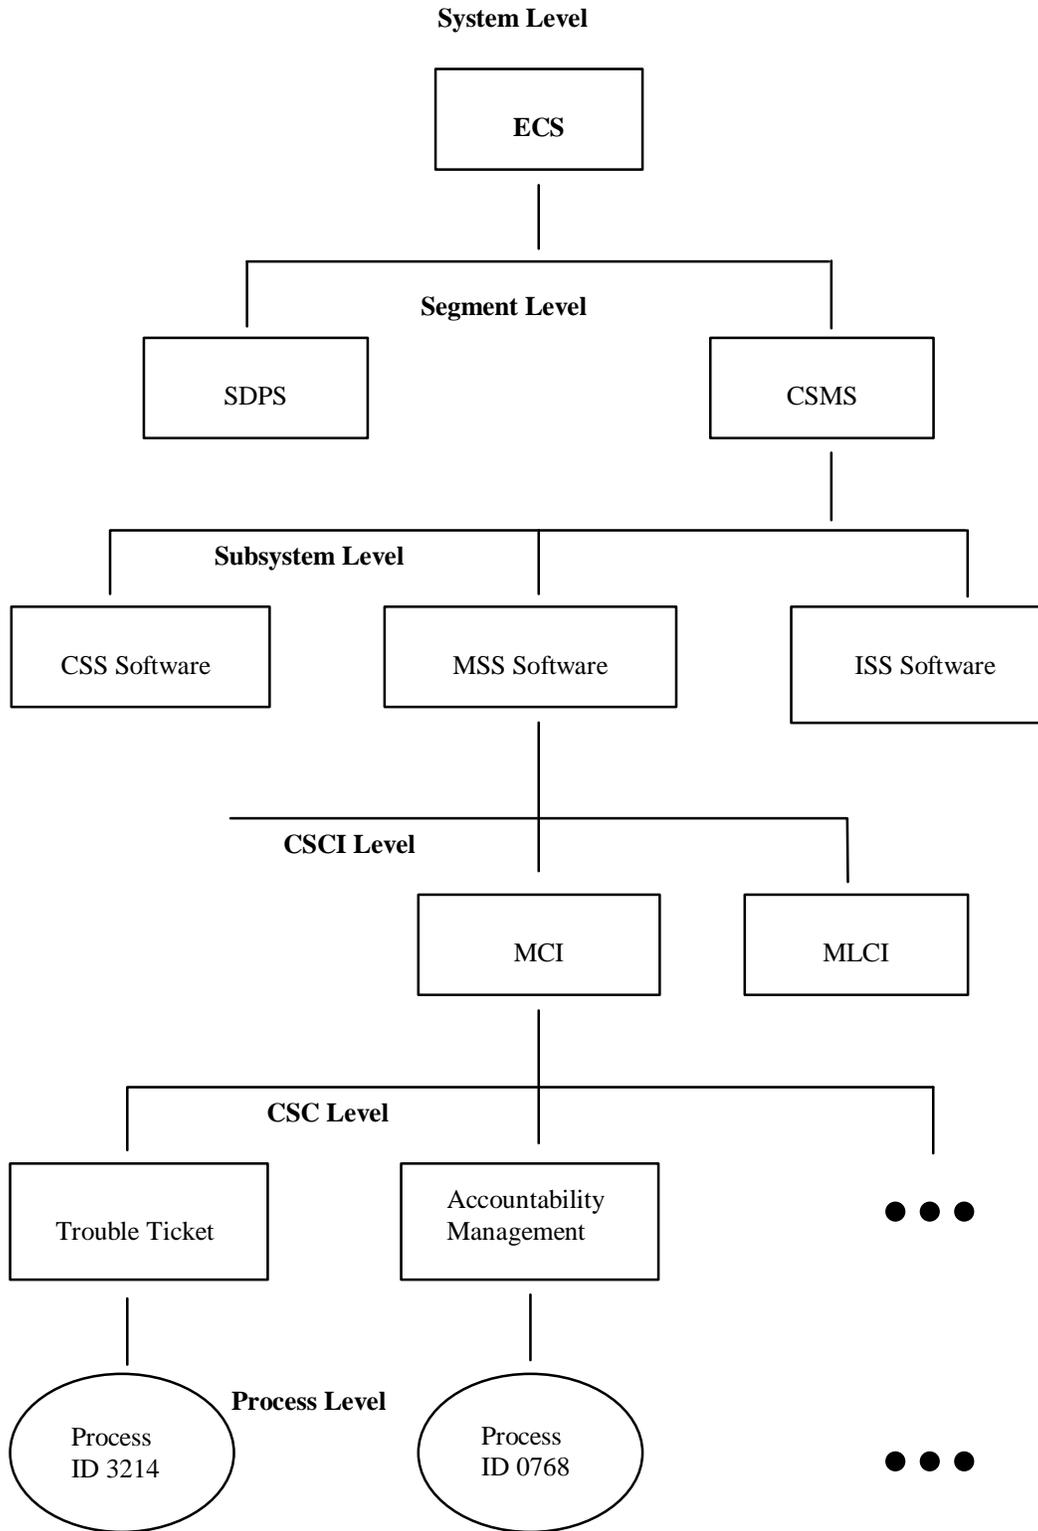


**Figure 3.2-1. Example Hierarchical Software Diagram**

### **3.2.1 Release 6B Context Description**

ECS Release 6B provides the capability to collect and process satellite science data as depicted in Figure 3.2-2.

The Science Data Processing and Communications and Systems Management are the two segments of the ECS Release 6B described in this document. The Science Data Processing Segment (SDPS) provides science data ingest and production, search and access functions, data archive, and system management capabilities. The SDPS receives Terra (AM-1) and Aqua (PM-1) Level 0 science data from EDOS and LOR Data from the Landsat 7 Archive Management System. The SDPS exchanges data with the ASTER GDS and other affiliated data centers to obtain science and other data (i.e., engineering and ancillary) required for data production. It also connects with the ASTER GDS to submit ASTER Data Acquisition Requests (DARs) for the collection of science data by the ASTER instrument. Science algorithms, provided by the Science Computing Facilities (SCFs), are used in data production to transform data into higher-level products (Level 1 to Level 4 products) for research. The ECS project uses SCF expertise to support the Quality Assurance activities of using the results of the Science Software Integration and Test (SSIT) activities to process data and verifies the data production science algorithms prior to actual data production. The Communications and Systems Management Segment (CSMS) provides the communications infrastructure for the ECS and systems management for all of the ECS hardware and software components. The CSMS provides the interconnection between users and service providers within the ECS, transfer of information between subsystems, CSCIs, CSCs, and processes of the ECS.

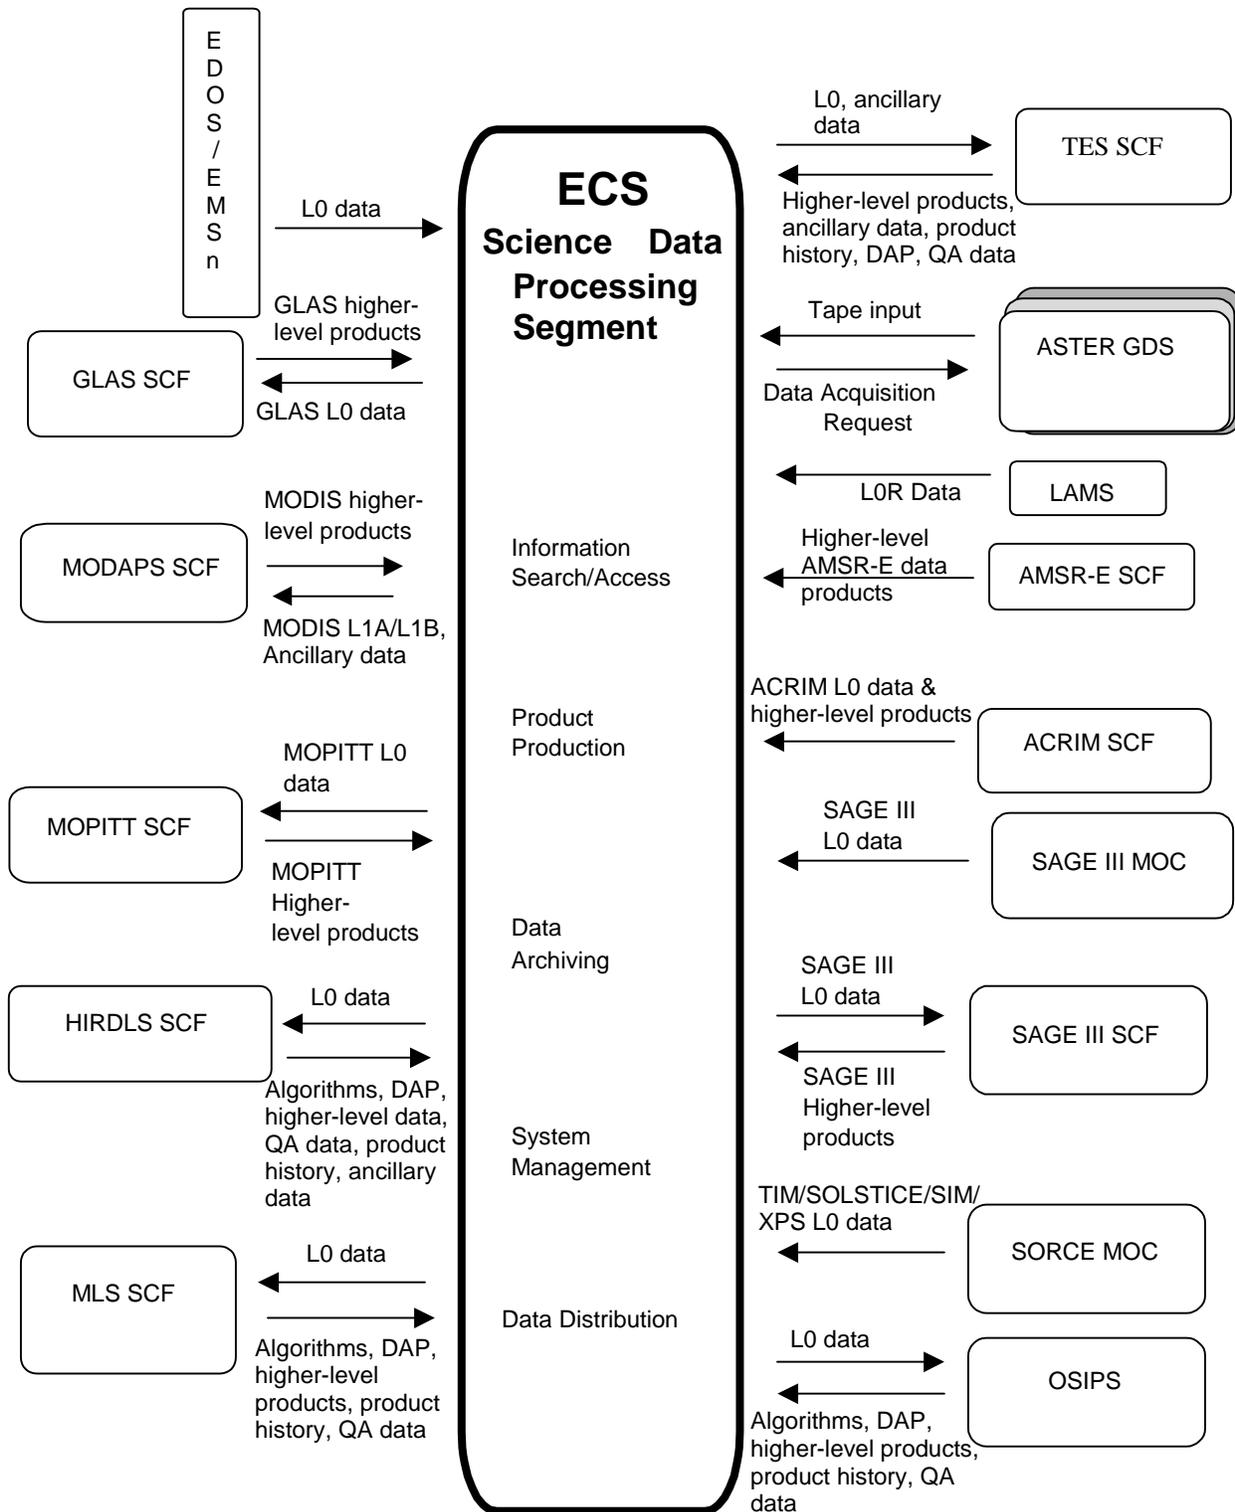

**Figure 3.2-2. Release 6B Context Diagram**

The remaining sections of this document provide an overview of the ECS Release 6B design and as such do not deal specifically with the configuration of components at each EOSDIS site. For more information on the site unique configurations, refer to the 920-series of General documents. Each of the segments consists of subsystems as specified in Section 3.2.

### **3.2.2 Release 6B Architecture**

#### **3.2.2.1 Subsystem Architecture**

The ECS SDPS subsystems are depicted in Figure 3.2-3. A subsystem consists of the Commercial Off The Shelf (COTS) and/or ECS developed software and the COTS hardware needed for its execution. The SDPS subsystems can be grouped into a 'Push' or 'Pull' category of functionality with the exception of DSS. As shown in the subsystem architecture diagram, the information search and data retrieval makes up the 'Pull' side of the ECS architecture/design and consists of the CLS, DMS, OMS, SSS, DPL and also uses the DSS functionality described on the 'Push' side of the ECS architecture. Data capture (ingest of data), storage management, planning and data processing of satellite or previously archived data from other sites make up the 'Push' side of the ECS architecture/design and consists of the DSS, INS, PLS, and DPS. This document describes the software and hardware components of each subsystem. However, since the hardware configurations differ between the sites, the hardware descriptions in this document are at a generic level. Specific hardware and network configurations for each site are documented in the 921-series Network Infrastructure documents.



The ECS architecture/design and consists of:

1. The DSS with the functions needed to
  - Archive (insert) science data
  - Search for and retrieve archived data
  - Manage (create and delete items from) the archives
  - Stage (store on physical media temporarily) data resources needed as input to data processing or resulting as output from their processing execution
2. The INS with interfaces to external suppliers (such as EDOS and LAMS) to:
  - Transfer data into SDPS and temporarily store the data
  - Provide staging capabilities for data waiting to be archived
  - Provide operator interfaces for managing ingest operations
3. The DPS and PLS with:
  - DPS dispatching and monitoring the execution of the science software, and interfaces to DSS to stage the input data needed and archive the generated data
  - PLS providing long and short term planning of science data processing of the production environment and production resources

Information search, data retrieval, and data distribution makes up the ‘Pull’ side of the ECS architecture/design and consists of:

1. The CLS, DMS, PDS, OMS, SSS and DPL with:
  - CLS providing user interfaces for data search and retrieval to science users and operators
  - DMS providing support for data search and retrieval across all ECS sites in conjunction with the DSS at each site. The DMS also provides a gateway as the interface to the Version 0 (V0) Information Management System (IMS) using the V0 IMS protocol
  - Other SDPS subsystems (i.e., CLS, PLS, DPS, DMS, and INS) use configuration files to determine the location of data and the services, offered by the DSS, for a particular type of data or distributed data that has been processed
  - PDS supporting the distribution of hard media to users ordering ECS data to be shipped to an address identified in their user profiles
  - OMS managing all orders received from the DMS V0 Gateway (i.e., from EDG, ECHO and GDS users) and orders submitted by the Spatial Subscription Server

- SSS supporting the creation, viewing and updating of subscriptions and the creation, viewing and deletion of bundling orders (specification of distribution packages and criteria for package completion)
- DPL supporting the search and order of selected granules with associated metadata and browse granules (if available)

CSMS – The following subsystems are the CSMS subsystems, which interact with and support the SDPS to complete the ECS architecture.

2. The MSS with:

- Hardware and software baseline and configuration management
- Trouble ticketing and nonconformance report (NCR) tracking
- System start-up and shut-down
- Fault and performance monitoring for networks, platforms, and software applications
- User account management and user order tracking

3. The CSS with:

- Control Center System (CCS) Middleware provides a common Name Server, which packages the common portions of the communication mechanisms into global objects to be used by all subsystems. The Name Server provides a set of standard CCS Proxy/Server classes, which encapsulates all of the common code for middleware communications (e.g., portals, couplers, RWCollectables, etc.)
- Libraries with common software mechanisms for application error handling, aspects of recovering client/server communications; Universal References to distributed objects and interfaces to e-mail, file transfer and network file copy capabilities
- External gateways to translate from the CSMS internal protocols, based on sockets, to protocols acceptable by external systems such as ASTER GDS and vice versa

4. The ISS with:

- Networking hardware devices (e.g., routers, switches, hubs, cabling, etc.) and their respective embedded software. For more information on site unique configurations, refer to the 920-series of General documents

This page intentionally left blank.

## 4. Subsystem Description

---

### Design Description Organization and Approach

This section presents a subsystem-by-subsystem overview description of the “as-built” ECS. The current high-level design information is provided for the Hardware Configuration Items (HWCI), Computer Software Configuration Items (CSCI), and Computer Software Components (CSC) for each subsystem and is being delivered to the DAACs in drop increments.

The SDPS and CSMS subsystem descriptions include:

- Subsystem functional overviews with a subsystem context diagram and a table of interface event descriptions
- CSCI descriptions with a context diagram and a table with interface event descriptions
- Architecture Diagrams, Process Descriptions, and Process Interface Event Tables. The Architecture Diagrams show the processes of the CSCI/CSC and how these processes connect with other CSCIs and CSCs of the same subsystem and the interfaces with other subsystems and external entities such as Operations, External Data Providers and Users. These processes and the supporting libraries are listed in Appendices A (Software Processes) and B (Software Libraries)
- Data Store descriptions for each CSCI in each SDPS/CSMS subsystem. The Data Stores are identified with the software name and shown in the architecture diagrams either as single data stores or as a group of data stores with a generic name such as “Data Stores” or “database”
- Hardware descriptions of the subsystem hardware items and the fail-over strategy

The convention used for Context and Architecture diagrams includes using circular shapes to show the subject subsystems, CSCIs, CSCs, or processes (with name in bold), elliptical shapes to show associated CSCIs, CSCs, or processes within a given subsystem and squares or rectangles to show external subsystems, CSCIs, CSCs, and processes. Data stores are shown using the data store or database name with horizontal lines, one above and one below the name. An interface event is data, a message (which includes a notification or status); a command, request or status code passed between subsystems, CSCIs, CSCs, or processes. The convention used to identify events is a straight line between two objects labeled with a phrase beginning with an action-oriented word to best describe the event. The arrow on the event line indicates an origination point and to where the event is directed. A direct response to an event is not always shown on the diagram because sometimes there is no response (e.g., for an insert or delete request) and other times the response comes from another part of the ECS. Interface events are identified in the interface event or process interface tables starting with the interface event at the top or middle of the diagram and going clock-wise around the diagram. The external interface subsystem is identified in the interface event description and is in bold to assist with the location of the interface events on the diagram. If there are two items in bold, there are two different interfaces

(Subsystems, CSCIs, or CSCs) requesting the same interface event. These conventions are consistent with other ECS documentation. The convention for naming the ECS processes is Ec <subsystem abbreviation> meaningful name. The *Ec* identifies the process as an ECS developed process versus a Commercial Off The Shelf (COTS) product. The *subsystem abbreviations* are listed subsystem-by-subsystem.

- Cl for CLS
- Cs for CSS
- Dl for DPL
- Dm for DMS
- Dp for DPS
- Ds for DSS
- In for INS
- Ms for MSS
- Om for OMS
- Pd for PDS
- Pl for PLS

The *meaningful name* identifies the process and its functionality within the subsystem, CSCI, or CSC. An example is EcDsScienceDataServer, which identifies an ECS-developed DSS process called the Science Data Server. Some names within an architecture diagram do not follow this convention because the names are COTS product names. All COTS product names are kept for simplicity and to adhere to licensing and trademark agreements. The remaining names that do not follow the naming convention are imbedded throughout the system and would require time to replace and cause operational disruptions. These names will be cleaned up during the final maintenance stages of the contract if directed by the customer.

### **Object-oriented modeling and design**

*Object-oriented modeling and design* is a new way of thinking about problems using models organized around real-world concepts. The fundamental construct is the object, which combines both data structure and behavior in a single entity. Object-oriented models are useful for understanding problems, communicating with application experts, modeling enterprises, preparing documentation and designing programs and databases.<sup>1</sup>

Superficially the term "object-oriented" means that we organize software as a collection of discrete objects that incorporate both data structure and behavior. This is in contrast to conventional programming in which data structure and behavior are only loosely connected. There is some dispute about exactly what characteristics are required by an object-oriented approach, but generally include four aspects: identity, classification, polymorphism and

inheritance.<sup>1</sup> *Identity* means that data is quantized into discrete, distinguishable entities called *objects*. A paragraph in my document, a window on my workstation and a white queen in a chess game are examples of objects. Objects can be concrete, such as a file, or conceptual, such as a *scheduling policy* in a multi-processing operating system. Each object has its own inherent identity. In other words, two objects are distinct even if all their attribute values (such as name and size) are identical.<sup>1</sup>

In the real world an object simply exists, but within a programming language each object has a unique *handle* by which it can be uniquely referenced. The handle may be implemented in various ways, such as an address, array index or unique value of an attribute. Object references are uniform and independent of the contents of the objects, permitting mixed collections of objects to be created, such as a file system directory that contains both files and sub-directories.<sup>1</sup>

*Classification* means that objects with the same data structure (attributes) and behavior (operations) are grouped into a *class*. Paragraph, Window, and ChessPiece are examples of classes. A *class* is an abstraction that describes properties important to an application and ignores the rest. Any choice of classes is arbitrary and depends on the application.<sup>1</sup>

Each class describes a possibly infinite set of individual objects. Each object is said to be an instance of its class. Each instance of the class has its own value for each attribute but shares the attribute names and operations with other instances of the class. An object contains an implicit reference to its own class: it "knows what kind of a thing it is."<sup>1</sup>

*Polymorphism* means that the same operation may behave differently on different classes. The *move* operation, for example, may behave differently on the *Window* and *ChessPiece* classes. An *operation* is an action or transformation that an object performs or is subject to. *Right justify*, *display* and *move* are examples of operations. A specific implementation of an operation by a certain class is called a *method*. Because an object-oriented operator is polymorphic, it may have more than one method implementing it.<sup>12</sup>

In the real world, an operation is simply an abstraction of analogous behavior across different kinds of objects. Each object "knows how" to perform its own operations. In an object-oriented programming language, however, the language automatically selects the correct method to implement an operation based on the name of the operation and the class of the object being operated on. The user of an operation need not be aware of how many methods exist to implement a given polymorphic operation. New classes can be added without changing existing code, provided methods are provided for each applicable operation on the new classes.<sup>1</sup>

*Inheritance* is the sharing of attributes and operations among classes based on a hierarchical relationship. A class can be defined broadly and then refined into successively finer *subclasses*. Each sub-class incorporates, or *inherits* all the properties of its *super-class* and adds its own unique properties. The properties of the superclass need not be repeated. For example,

---

<sup>1</sup> Object-oriented Modeling and design, James Rumbaugh et al, copyright 1991 by Prentice-Hall, Inc. ISBN 0-13-629841-9

<sup>2</sup> Object-oriented Modeling and design, James Rumbaugh et al, copyright 1991 by Prentice-Hall, Inc. ISBN 0-13-629841-9

*ScrollingWindow* and *FixedWindow* are subclasses of *Window*. Both subclasses inherit the properties of *Window*, such as a visible region on the screen.<sup>1</sup>

The ECS is a large, complex data storage and retrieval system used to store and retrieve large amounts of science and science-related data. The system was designed using an object oriented design approach. With so many objects and the sizes of some of them, it is necessary to have some insight into the amount of memory being utilized within the ECS. The information about to be presented is a brief look at the memory management of the "key" (top ten utilized) objects within the ECS subsystems.

In this object oriented system design, objects are created and used via classes throughout the system to help perform the functions and meet the needs of the system. The objects for the ECS are very numerous, sometimes very large and cannot be provided in their entirety at this time. However, presented in the table below are the "key" objects for this system and how they are created, passed and deleted within the ECS.

### **Introduction to memory management approaches and memory usage table**

Good memory management in some applications is both important and requires significant planning and development time. Many important ECS applications are large, long running, multi-threaded, heavy memory users and therefore are prime candidates for improved memory management.<sup>1</sup>

Improper memory management can result in memory leaks, fast memory usage growth or large application footprints and random crashes. ECS servers are periodically purified for memory leaks and there is a history of progress in this area. Similar work should be expected to continue as development and maintenance continues.

Long running server like applications that are free from memory leaks can nonetheless have significant memory and Central Processing Unit (CPU) usage performance degradation. A common culprit is heap fragmentation. The repeated allocation and deallocation of memory (such as with the new and delete operators of C++) can result in a large number of unusable free blocks of memory. They are free blocks but are interspersed with non-free blocks. They become unusable since they are not contiguous (fragmented) and as time goes by, it becomes harder and harder for the OS to service requests for more memory. Such situations even lead to crashes of other, non-offending applications running in the same box.

There are strategies, tools and software to avoid both memory leaks and fragmentation. This includes but is not limited to:

- Periodic application of purification software (already an ECS practice)
- Software design, which uses dynamic memory as little as possible, such as automatic storage or COTS data structures

---

<sup>1</sup> Object-oriented Modeling and design, James Rumbaugh et al, copyright 1991 by Prentice-Hall, Inc. ISBN 0-13-629841-9

- Class-level memory management to allocate large chunks of memory instead of one class instance at a time ("Effective C++" by Scott Meyers and "Advanced C++" by James Coplien address this technique)
- Non-class level memory pools and
- COTS heap manager

Table 4.1-1 below is provided in case further memory management improvements are desired. Given operator or field input of seemingly inefficient memory or CPU usage, this table can be used to help target specific ECS subsystems, servers and frameworks or classes for improvement. It can be decided to apply some of the approaches at one level (e.g., on one guinea pig server or class) or perhaps experiment with changing the entire ECS C++ system with the use of a COTS heap manager. In any case, a great deal of planning and manpower is required.

**Table 4.1-1. Memory Management Table (1 of 26)**

Subsystem Name	Executable Name (M)	Key Classes	Description (M)	Where Created? (Executable/process name) (M)	Passed To (Executable/process name)	Where Deleted? (process name) (M)	Number of Instances (Example – 1 per granule)	Comments/Remarks (Items of special interest. Example - Size per instantiation, never “deleted”, etc.)
<b>DSS - SDSRV</b>	EcDsScienceDataServer	DsSrSession	Manages threads to execute requests associated with the Working Collection.	EcDsScienceDataServer (class: DsSrConnectionMaker)	DsSrManagedServer	DsSrManagedServer	One per DsSrWorkingCollection	Object is deleted when the Science Data Server goes down.
	EcDsScienceDataServer	DsSrWorkingCollection	A “shopping basket” class containing a vector of ESDTs used to execute requests.	EcDsScienceDataServer (class: DsSrSession class).	EcDsScienceDataServer (class: DsSrWarmStartManager)	Deleted when its corresponding DsSrSession object is deleted.	One per DsSrSession object.	
	EcDsScienceDataServer	DsSrWarmStartManager	Singleton class controlling processing of asynchronous requests.	EcDsScienceDataServer (class: DsSrManagedServer)	not passed	EcDsScienceDataServer	Either 1 instance or no instances for all of SDSRV.	Static singleton class. Object is deleted when the Science Data Server goes down.
	Clients, EcDsScienceDataServer	DsShRequestReal	This class provides a server interface to the server's request distributed object. It inherits from the DCE-generated server request class, and adds functions to provide stronger type checking.	Clients, EcDsScienceDataServer	EcDsScienceDataServer or other servers related	When request is finished or server goes down	1 per client request.	This class communicates between clients and EcDsScienceDataServer.

**Table 4.1-1. Memory Management Table (2 of 26)**

Subsystem Name	Executable Name (M)	Key Classes	Description (M)	Where Created? (Executable/process name) (M)	Passed To (Executable/process name)	Where Deleted? (process name) (M)	Number of Instances (Example – 1 per granule)	Comments/Remarks (Items of special interest. Example - Size per instantiation, never “deleted”, etc.)
	Clients and EcDsScienceDataServer	GIPParameterList	This library is used by many subsystems to provide a general-purpose list object for storing various scalar and complex data types.	Clients and EcDsScienceDataServer	EcDsScienceDataServer and EcDsDistributionServer	Clients	Could have many in each request	To group one or more GIPParameter derived classes that store the various parameter types required building commands. Any GI type, including embedded GIPParameterLists can be inserted into a GIPParameterList, making it recursive in design.
	EcDsScienceDataServer	DsGeESDT	Inherit from the public class - provides basic ESDT functionality.	EcDsScienceDataServer	EcDsDistributionServer, EcDsStRequestManagerServer and other related applications	EcDsScienceDataServer and other related applications	1 per granule	This class provides functionality common to all SDSRV data types.
	DsSrManagedServer::DsSrStart()	DsBtSbrvNotifier	This class is used to facilitate communication between the SDSRV and SBSRV through an event queue.	EcDsScienceDataServer [class::method = DsSrManagedServer::DsSrStart() ]	not passed	EcDsScienceDataServer [class::method = DsSrManagedServer::DsSrStart() ]	Configurable	Only one instance per session is created. The object goes away when the server goes down.

**Table 4.1-1. Memory Management Table (3 of 26)**

Subsystem Name	Executable Name (M)	Key Classes	Description (M)	Where Created? (Executable/process name) (M)	Passed To (Executable/process name)	Where Deleted? (process name) (M)	Number of Instances (Example – 1 per granule)	Comments/Remarks (Items of special interest. Example - Size per instantiation, never “deleted”, etc.)
	EcDsScienceDataServer [function = DsGeESDT::Insert() ]	DsMdMetadata	This class is used as a container class for metadata.	EcDsScienceDataServer [function = DsGeESDT::Insert() ]	not passed	See comments/remarks column.	1 per DsGeESDT	When this object is instantiated, it uses the local memory manager. The object can be saved to the database if the user is executing an insert.
	EcDsScienceDataServer [ class::method= DsSrGenCatalogPool::DsSrGenCatalogPool() ]	DsMdCatalog	This class is used to manage catalog pools.	DsSrGenCatalogPool::DsSrGenCatalogPool()	not passed	EcDsScienceDataServer	Depends on the configured pool size.	There are three default pools for catalogs: SEARCH, INSERT and DEFAULT. The object goes away when the server goes down.
	EcDsScienceDataServer	DsDbInterface	Database (Sybase) interface class to encapsulate database related services such as: connect, execute, fetch result.	EcDsScienceDataServer	not passed	When EcDsScienceDataServer is down	2 per DsMsCatalog	User can connect to DB, execute SQL statements, verify connection states and disconnect from the database.

**Table 4.1-1. Memory Management Table (4 of 26)**

Subsystem Name	Executable Name (M)	Key Classes	Description (M)	Where Created? (Executable/process name) (M)	Passed To (Executable/process name)	Where Deleted? (process name) (M)	Number of Instances (Example – 1 per granule)	Comments/Remarks (Items of special interest. Example - Size per instantiation, never “deleted”, etc.)
	Clients	DsCIESDTRreferenceCollector	Provides the primary interaction mechanism for client software.	Clients	EcDsScienceDataServer	EcDsSdsrvTest or EcDsTsClientDriver or when clients go down	1 per client connection	As its name implies, it is a collector of the DsCIESDTRreference object referred to as the clients "working collection", which is populated with the results of service requests such as "Acquire", "Insert", "Search."
<b>DSS - STMGT</b>	EcDsStRequestManagerServer EcDsStCacheManagerServer EcDsStStagingDiskServer EcDsStArchiveServer EcDsStFtpServer EcPdPDSEcDsStmgGui	DsStDictionary	Maps a string name to a string value.	EcDsStRequestManagerServer EcDsStCacheManagerServer EcDsStStagingDiskServer EcDsStArchiveServer EcDsStFtpServer EcPdPDS EcDsStmgG	not passed not passed not passed not passed not passed not passed not passed	EcDsStRequestManagerServer EcDsStCacheManagerServer EcDsStStagingDiskServer EcDsStArchiveServer EcDsStFtpServer EcPdPDS EcDsStmgGui	Used in Singleton DsStStProcTable	Object is deleted when the server goes down.

**Table 4.1-1. Memory Management Table (5 of 26)**

Subsystem Name	Executable Name (M)	Key Classes	Description (M)	Where Created? (Executable/process name) (M)	Passed To (Executable/process name)	Where Deleted? (process name) (M)	Number of Instances (Example – 1 per granule)	Comments/Remarks (Items of special interest. Example - Size per instantiation, never “deleted”, etc.)
<b>DSS - STMGT</b>	EcDsStRequestManagerServer EcDsStCacheManagerServer EcDsStStagingDiskServer EcDsStArchiveServer EcDsStFtpServer EcPdPDS EcDsStmgtGui	DsStStProcTable	A singleton used to create a dictionary that associates a stored procedure name with a list of parameters in the order that they appear in the stored procedure declaration.	EcDsStRequestManagerServer EcDsStCacheManagerServer EcDsStStagingDiskServer EcDsStArchiveServer EcDsStFtpServer EcPdPDS EcDsStmgtGui	not passed not passed not passed not passed not passed not passed not passed	EcDsStRequestManagerServer EcDsStCacheManagerServer EcDsStStagingDiskServer EcDsStArchiveServer EcDsStFtpServer EcPdPDS EcDsStmgtGui	Singleton	Object is deleted when the server goes down.

**Table 4.1-1. Memory Management Table (6 of 26)**

Subsystem Name	Executable Name (M)	Key Classes	Description (M)	Where Created? (Executable/process name) (M)	Passed To (Executable/process name)	Where Deleted? (process name) (M)	Number of Instances (Example – 1 per granule)	Comments/Remarks (Items of special interest. Example - Size per instantiation, never “deleted”, etc.)
	EcDsStRequestManagerServer EcDsStCacheManagerServer EcDsStStagingDiskServer EcDsStArchiveServer EcDsStFtpServer EcPdPDS EcDsStmgtGui EcDsDistributionServer EclnReqMgr EclnGran	DsStRemoteTransaction	Handles the remote transactions for stored procedure call. It converts the request in a format, which can be passed across a network interface.	EcDsStRequestManagerServer EcDsStCacheManagerServer EcDsStStagingDiskServer EcDsStArchiveServer EcDsStFtpServer EcPdPDS EcDsStmgtGui EcDsDistributionServer EclnReqMgr EclnGran	not passed not passed not passed not passed not passed not passed not passed not passed not passed not passed	EcDsStRequestManagerServer EcDsStCacheManagerServer EcDsStStagingDiskServer EcDsStArchiveServer EcDsStFtpServer EcPdPDS EcDsStmgtGui EcDsDistributionServer EclnReqMgr EclnGran	4 per request (client request and result, server request and result)	

**Table 4.1-1. Memory Management Table (7 of 26)**

Subsystem Name	Executable Name (M)	Key Classes	Description (M)	Where Created? (Executable/process name) (M)	Passed To (Executable/process name)	Where Deleted? (process name) (M)	Number of Instances (Example – 1 per granule)	Comments/Remarks (Items of special interest. Example - Size per instantiation, never “deleted”, etc.)
	EcDsStRequestManagerServer EcDsStCacheManagerServer EcDsStStagingDiskServer EcDsStArchiveServer EcDsStFtpServer EcPdPDS EcDsStmgtGui EcDsDistributionServer EclnReqMgr EclnGran	DsStRemoteSP	Parent class of DsStRemoteTransaction.	EcDsStRequestManagerServer EcDsStCacheManagerServer EcDsStStagingDiskServer EcDsStArchiveServer EcDsStFtpServer EcPdPDS EcDsStmgtGui EcDsDistributionServer EclnReqMgr EclnGran	not passed not passed not passed not passed not passed not passed not passed not passed not passed not passed	EcDsStRequestManagerServer EcDsStCacheManagerServer EcDsStStagingDiskServer EcDsStArchiveServer EcDsStFtpServer EcPdPDS EcDsStmgtGui EcDsDistributionServer EclnReqMgr EclnGran	Multiple times per request	
	DsStRequestManagerServer	DsStRequest	Describes all possible states of a request.	DsStRequestManagerServer	not passed	DsStRequestManagerServer	1 per request	
	DsStRequestManagerServer	DsStRequestQueue	Provides queuing mechanism for DsStRequest objects.	DsStRequestManagerServer	not passed	DsStRequestManagerServer	Singleton	

**Table 4.1-1. Memory Management Table (8 of 26)**

Subsystem Name	Executable Name (M)	Key Classes	Description (M)	Where Created? (Executable/process name) (M)	Passed To (Executable/process name)	Where Deleted? (process name) (M)	Number of Instances (Example – 1 per granule)	Comments/Remarks (Items of special interest. Example - Size per instantiation, never “deleted”, etc.)
	EcDsScienceDataServer(DLL), EcDsDistributionServer, EcDsStArchiveServer	DsStFileParameters	Data structure to maintain the file related parameters.	EcDsScienceDataServer (DLL), EcDsDistributionServer, EcDsStArchiveServer	not passed  not passed  not passed	EcDsScienceDataServer (DLL), EcDsDistributionServer, EcDsStArchiveServer	Multiples times per request within Archive server and Archive client	
<b>DSS - STMGT</b>	EcDsStCacheManagerServer, EcDsStStagingDiskServer, DsStArchiveServer	DsStCopyService	File I/O operation for Copy service.	EcDsStCacheManagerServer, EcDsStStagingDiskServer, DsStArchiveServer	not passed  not passed  not passed	EcDsStCacheManagerServer, EcDsStStagingDiskServer, DsStArchiveServer	One per CacheManagerServiceThread, One per StagingDiskServiceThread, One per ArchiveWriteThread	The item should be the DsStCopyService class rather than the DsStCopyService::Copy function.

**Table 4.1-1. Memory Management Table (9 of 26)**

Subsystem Name	Executable Name (M)	Key Classes	Description (M)	Where Created? (Executable/process name) (M)	Passed To (Executable/process name)	Where Deleted? (process name) (M)	Number of Instances (Example – 1 per granule)	Comments/Remarks (Items of special interest. Example - Size per instantiation, never “deleted”, etc.)
	EcDsStCacheManagerServer, EcDsStStagingDiskServer, DsStArchiveServer	DsStFtpService::FtpCopy( )	File I/O operation for Copy service.	EcDsStCacheManagerServer, EcDsStStagingDiskServer, DsStArchiveServer	not passed not passed not passed	EcDsStCacheManagerServer, EcDsStStagingDiskServer, DsStArchiveServer	One per CacheManagerServiceThread, One per StagingDiskServiceThread, One per ArchiveWriteThread	
	EcDsStCacheManagerServer, EcDsStStagingDiskServer, DsStArchiveServer	DsStFtpService::FtpRetr( )	File I/O operation for Copy service.	EcDsStCacheManagerServer, EcDsStStagingDiskServer, DsStArchiveServer	not passed not passed not passed	EcDsStCacheManagerServer, EcDsStStagingDiskServer, DsStArchiveServer	One per CacheManagerServiceThread, One per StagingDiskServiceThread, One per ArchiveWriteThread	
<b>DSS - DDIST</b>	EcDsDistributionServer	DsDdMedia	Contains media drivers and request level media information, like media type.	EcDsDistributionServer	not passed	EcDsDistributionServer	Created once per DDIST request.	

**Table 4.1-1. Memory Management Table (10 of 26)**

Subsystem Name	Executable Name (M)	Key Classes	Description (M)	Where Created? (Executable/process name) (M)	Passed To (Executable/process name)	Where Deleted? (process name) (M)	Number of Instances (Example – 1 per granule)	Comments/Remarks (Items of special interest. Example - Size per instantiation, never “deleted”, etc.)
	EcDsDistributionServer	DsDdDistRequestS	Contains request level information, like State and orderID.	EcDsDistributionServer	not passed	EcDsDistributionServer	Created once per DDIST request.	
	EcDsDistributionServer	DsDdDistListS	Contains pointers to granule and file information for the request.	EcDsDistributionServer	not passed	EcDsDistributionServer	Created once per DDIST request.	
	EcDsDistributionServer	DsDdMediaDist	Contains packaging information and has a one-to-one correspondence to physical media for the request. Note: requests can be sufficiently large to span more than one physical media.	EcDsDistributionServer	not passed	EcDsDistributionServer	Created at least once per each DsDdMedia	
	EcDsDistributionServer	DsDdGranuleS	Contains granuleUR information.	EcDsDistributionServer	not passed	EcDsDistributionServer	Created for each granule for each request.	
	EcDsDistributionServer	DsDdDistFileS	Contains file information, like file name & file size.	EcDsDistributionServer	not passed	EcDsDistributionServer	Created for each file (archive data file, metadata file, etc.) in each granule	

**Table 4.1-1. Memory Management Table (11 of 26)**

Subsystem Name	Executable Name (M)	Key Classes	Description (M)	Where Created? (Executable/process name) (M)	Passed To (Executable/process name)	Where Deleted? (process name) (M)	Number of Instances (Example – 1 per granule)	Comments/Remarks (Items of special interest. Example - Size per instantiation, never “deleted”, etc.)
	Created in most functions and most object constructors	RWCString	The rogue-wave string class used through all classes and functions.	Created in most functions and most object constructors.	An extensive list of functions.	An extensive list of functions.	Created in most functions and most object constructors.	
	Created in most functions.	DsDdLog	Utility for simplifying logging.	Created in most functions.	EcDsDistributionServer	EcDsDistributionServer	Created in most functions.	
	EcDsDistributionServer	DsDdActiveQueue	A Queue of requests that are in Active, Staging, and Transferring states.	EcDsDistributionServer	not passed	EcDsDistributionServer	Created once (singleton class)	
	EcDsDistributionServer	DsDdBaseQueue	Parent class of the remaining queues.	EcDsDistributionServer	not passed	EcDsDistributionServer	Created once (singleton class)	
	EcDsDistributionServer	DsDdConfiguration	Utility class for reading configuration information.	EcDsDistributionServer	not passed	EcDsDistributionServer	Created once (singleton class)	
	EcDsDistributionServer	DsDdDoneQueue	A Queue of requests in the Shipped, Failed or Cancelled states.	EcDsDistributionServer	not passed	EcDsDistributionServer	Created once (singleton class)	
	EcDsDistributionServer	DsDdHoldQueue	A Queue of requests that are in one of the suspended states.	EcDsDistributionServer	not passed	EcDsDistributionServer	Created once (singleton class)	

**Table 4.1-1. Memory Management Table (12 of 26)**

Subsystem Name	Executable Name (M)	Key Classes	Description (M)	Where Created? (Executable/process name) (M)	Passed To (Executable/process name)	Where Deleted? (process name) (M)	Number of Instances (Example – 1 per granule)	Comments/Remarks (Items of special interest. Example - Size per instantiation, never “deleted”, etc.)
	EcDsDistributionServer	DsDdPriorityQueue	A Priority Queue of requests that are pending. Uses DsDdThreadPool class in the process of selecting the next request for processing.	EcDsDistributionServer	not passed	EcDsDistributionServer	Created once (singleton class)	
	EcDsDistributionServer	DsDdReadyToShipQueue	A Queue of hard media requests waiting on the operator for selection to enter the Shipped state.	EcDsDistributionServer	not passed	EcDsDistributionServer	Created once (singleton class)	
	EcDsDistributionServer	DsDdRequestListS	List of all DDIST requests.	EcDsDistributionServer	not passed	EcDsDistributionServer	Created once (singleton class)	
	EcDsDistributionServer	DsDdScheduler	Class, which wakes up worker threads and assigns them to requests as selected by the DsDdPriorityQueue.	EcDsDistributionServer	not passed	EcDsDistributionServer	Created once (singleton class)	
	EcDsDistributionServer	DsDdThreadPool	Uses thread pools DB tables and procedures to select next request for processing, given request information and constraints.	EcDsDistributionServer	not passed	EcDsDistributionServer	Created once per each thread pool name (usually 5 - 50)	

**Table 4.1-1. Memory Management Table (13 of 26)**

Subsystem Name	Executable Name (M)	Key Classes	Description (M)	Where Created? (Executable/process name) (M)	Passed To (Executable/process name)	Where Deleted? (process name) (M)	Number of Instances (Example – 1 per granule)	Comments/Remarks (Items of special interest. Example - Size per instantiation, never “deleted”, etc.)
<b>DMS</b>	DMS	GIParameterList::DeepAssign( )	Generic copy method for ECS composite class.	DMS	SDSRV (CSCI), PLANG (CSCI), Registry (CSC)	Where appropriate	Extensive	DMS code compensates for native leak by client side action
	DmGwV0EcsRequest Reciever	DmGwInventoryRequest	Handler for V0 Inventory Searches.	DmGwV0EcsRequestReciever	not passed	DmGwV0EcsRequestReciever	1 per thread	No significant leaks
	DmGwV0EcsRequest Reciever	DmGwBrowseRequest	Handler for V0 Browse Requests.	DmGwV0EcsRequestReciever	not passed	DmGwV0EcsRequestReciever	1 per thread	No significant leaks, but for integrated browse may hold large amount of memory while active
	DmGwV0EcsRequest Reciever	DmGwProductRequest	Handler for V0 Product Requests.	DmGwV0EcsRequestReciever	not passed	DmGwV0EcsRequestReciever	1 per thread	No significant leaks
	EcDmV0ToEcsGateway	DmGwSpecializedCriteria	Representation of V0 SPECIALIZED_CRITERIA element.	EcDmV0ToEcsGateway	not passed	Where appropriate	Extensive	Recursive class, potential for large memory usage. No significant leaks.
	DmGwV0EcsRequest Reciever	DmGwDirectoryRequest	Handler for V0 Directory Searches.	DmGwV0EcsRequestReciever	not passed	DmGwV0EcsRequestReciever	1 per thread	No significant leaks
	DmGwInventoryRequest	DmGwGranuleLevelSearch	SDSRV search client-side search object.	DmGwInventoryRequest	not passed	DmGwInventoryRequest	1 per data set searched	No significant leaks
	DmGwManagedServer	DmGwRequestReceiver	Listener / Dispatch class for EcDmV0ToEcsGateway.	DmGwManagedServer	not passed	DmGwManagedServer	1 per session	No significant leaks

**Table 4.1-1. Memory Management Table (14 of 26)**

Subsystem Name	Executable Name (M)	Key Classes	Description (M)	Where Created? (Executable/ process name) (M)	Passed To (Executable/ process name)	Where Deleted? (process name) (M)	Number of Instances (Example – 1 per granule)	Comments/Remarks (Items of special interest. Example - Size per instantiation, never “deleted”, etc.)
	DmGwDataset	EcRgDistOptions	Client class for distribution options provision.	DmGwDataset	not passed	DmGwDataset	1 per search	No significant leaks
	DmGwDataset	EcRgSubsetOptions	Client class for subset options provision.	DmGwDataset	not passed	DmGwDataset	1 per search	No significant leaks
<b>DPS</b>	EcDpPrEM EcDpPrDeletion EcPIPREditor_IF EcPIOdMgr	DpPrDSSInterface	Interface to SDSRV.	EcDpPrEM EcDpPrDeletion EcPIPREditor_IF EcPIOdMgr	not passed	EcDpPrEM EcDpPrDeletion EcPIPREditor_IF EcPIOdMgr	# granules x DPR # interim files x DPR # input granules x DPR # input granules x OD DPR	
	EcDpPrEM	DpPrDataManager	Manages acquires and inserts of granules from/to SDSRV.	EcDpPrEM	not passed	EcDpPrEM	# granules x DPR	
	EcDpPrEM	DpPrExecutionManager	Supervisory program for DPR execution.	EcDpPrEM	not passed	EcDpPrEM	2 x DPR	
	EcDpPrEM	DpPrResourceManager	Manages disk allocation for files and CPUs for DPRs.	EcDpPrEM	not passed	EcDpPrEM	(# files + 2) x DPR	

**Table 4.1-1. Memory Management Table (15 of 26)**

Subsystem Name	Executable Name (M)	Key Classes	Description (M)	Where Created? (Executable/process name) (M)	Passed To (Executable/process name)	Where Deleted? (process name) (M)	Number of Instances (Example – 1 per granule)	Comments/Remarks (Items of special interest. Example - Size per instantiation, never “deleted”, etc.)
	EcDpPrJobMgmt EcDpPrEM	DpPrScheduler	Manages DPR construction in AutoSys and scheduling on computers.	EcDpPrJobMgmt	not passed	EcDpPrJobMgmt	1 x DPR and until server is brought down	
	EcDpPrEM	DpPrPcf	Constructs process control file.	EcDpPrEM	not passed	EcDpPrEM	1x DPR	
	EcDpPrJobMgmt	DpPrCotsManager	Interface to AutoSys.	EcDpPrJobMgmt	not passed	EcDpPrJobMgmt	2 x DPR	
	EcDpPrJobMgmt	DpPrJIL	Interface to AutoSys.	EcDpPrJobMgmt	not passed	EcDpPrJobMgmt	1 x DPR	
	EcDpPrEM	DpPrPge	Manages acquire of PGE.	EcDpPrEM	not passed	EcDpPrEM	1 x DPR	
	EcDpPrEM	DpPrFile	Helper class for DprPrDataManagement.	EcDpPrEM	not passed	EcDpPrEM	# files x DPR	
	EcDpPrDeletion	DpDeletionServer	Removes PDPS files that are no longer used.	EcDpPrDeletion	not passed	EcDpPrDeletion	until server is brought down	
	EcDpPrDeletionClient	DpDeletionProxy	Responsible for identifying files to be deleted.	EcDpPrDeletionClient	not passed	EcDpPrDeletionClient	2 x day	
PLS	EcPIPREditor	PIDpr	Data Processing Request class.	EcPIPREditor	not passed	EcPIPREditor	1 per DPR	Created as a member of a static pool which is deleted when PREditor is brought down
	EcPIPREditor	PIUserParameters	PGE Processing Parameters class.	EcPIPREditor	not passed	EcPIPREditor	Multiple per PGE	

**Table 4.1-1. Memory Management Table (16 of 26)**

Subsystem Name	Executable Name (M)	Key Classes	Description (M)	Where Created? (Executable/process name) (M)	Passed To (Executable/process name)	Where Deleted? (process name) (M)	Number of Instances (Example – 1 per granule)	Comments/Remarks (Items of special interest. Example - Size per instantiation, never “deleted”, etc.)
	EcPIPREditor, EcPIOdMgr, EcPISubMgr	PIDprData	Record that relates each input/output granule with a Data Processing Request.	EcPIPREditor, EcPIOdMgr, EcPISubMgr	not passed not passed not passed	EcPIPREditor, EcPIOdMgr, EcPISubMgr	1 per unavailable primary/alternate input	
	EcPIPREditor, EcPIOdMgr	PIDataGranule	Record for each input/output granule.	EcPIPREditor, EcPIOdMgr	not passed not passed	EcPIPREditor, EcPIOdMgr	1 per input/output granule	
	EcPIPREditor, EcPIOdMgr	PIPge	Record of PDPS PGE information.	EcPIPREditor, EcPIOdMgr	not passed not passed	EcPIPREditor, EcPIOdMgr	1 per Pge	Created as a member of a static pool which is deleted when PREditor or OdMgr are brought down
	EcPIOdMgr	PIHighLevelOrder	Record of ASTER OnDemand High Level Order.	EcPIOdMgr	not passed	EcPIOdMgr	1 per High Level order	Deleted after each ASTER OnDemand order is processed
	EcPIPREditor, EcPIOdMgr	PIDataScheduled	Record of Data Scheduled type PGE.	EcPIPREditor, EcPIOdMgr	not passed not passed	EcPIPREditor, EcPIOdMgr	1 per Data Scheduled PGE	Deleted after PGE information is collected
	EcPIPREditor, EcPIOdMgr	PIDataTypeReq	Record of ESDT of Data Processing Request input.	EcPIPREditor, EcPIOdMgr	not passed not passed	EcPIPREditor, EcPIOdMgr		
	EcPIPREditor, EcPIOdMgr	PIMetadataChecks	Record of required metadata checks for PGE inputs.	EcPIPREditor, EcPIOdMgr	not passed not passed	EcPIPREditor, EcPIOdMgr	1 per PGE input if metadata checks are required	Deleted when the collection is destroyed

**Table 4.1-1. Memory Management Table (17 of 26)**

Subsystem Name	Executable Name (M)	Key Classes	Description (M)	Where Created? (Executable/process name) (M)	Passed To (Executable/process name)	Where Deleted? (process name) (M)	Number of Instances (Example – 1 per granule)	Comments/Remarks (Items of special interest. Example - Size per instantiation, never “deleted”, etc.)
	EcPIPREditor	PIUserParameters	Record of user defined processing parameter values.	EcPIPREditor	not passed	EcPIPREditor	1 per Pge, if defined	Deleted when the collection is destroyed
	EcPIPREditor, EcPIOdMgr	PITimeScheduled	Class that represents a Time Scheduled type PGE.	EcPIPREditor, EcPIOdMgr	not passed not passed	EcPIPREditor, EcPIOdMgr	1 per Time Scheduled PGE	Deleted after PGE information is collected
	EcPIOdMgr	PIStandingOrderGranules	Collection of ASTER OnDemand input granules with DAR Ids associated with user requests.	EcPIOdMgr	not passed	EcPIOdMgr	1 per Standing Order with a matching DAR ID	Deleted after all relevant OnDemand orders are processed
	EcPIPREditor, EcPIOdMgr	PISnapshotScheduled	Class that represents a Snapshot Scheduled type PGE.	EcPIPREditor, EcPIOdMgr	not passed not passed	EcPIPREditor, EcPIOdMgr	1 per Snapshot Scheduled PGE	Deleted after PGE information is collected
	EcPIPREditor	PIRoutineArrival	Class that represents an input data ESDT that is ingested at regular, predictable time intervals.	EcPIPREditor	not passed	EcPIPREditor	1 per routinely arriving input granule	Deleted after Data Processing Request information is collected
	EcPIPREditor, EcPIOdMgr	PIOutputYield	Class that represents Data Processing Request outputs ESDTs.	EcPIPREditor, EcPIOdMgr	not passed not passed	EcPIPREditor, EcPIOdMgr		

**Table 4.1-1. Memory Management Table (18 of 26)**

Subsystem Name	Executable Name (M)	Key Classes	Description (M)	Where Created? (Executable/ process name) (M)	Passed To (Executable/ process name)	Where Deleted? (process name) (M)	Number of Instances (Example – 1 per granule)	Comments/Remarks (Items of special interest. Example - Size per instantiation, never “deleted”, etc.)
<b>CSS</b>	EcSbSubServer	GIParameterList	A class that collects the general parameters of ECS.	EcSbSubServer	EcSbCl	EcSbSubServer	9	
	EcSbSubServer			EcSbSubServer	not passed	EcSbSubServer	66	
	EcSbGui			EcSbGui	not passed	EcSbGui	19	
	EcCsEmailParser			EcCsEmailParser	not passed	EcCsEmailParser	9	
	EcCsMojoGateway			EcCsMojoGateway	not passed	EcCsMojoGatewa	29	
	EcCsMtMGateway			EcCsMtMGateway	not passed	y	31	
	EcCsRegistry			EcCsRegistry	not passed	y		

**Table 4.1-1. Memory Management Table (19 of 26)**

Subsystem Name	Executable Name (M)	Key Classes	Description (M)	Where Created? (Executable/process name) (M)	Passed To (Executable/process name)	Where Deleted? (process name) (M)	Number of Instances (Example – 1 per granule)	Comments/Remarks (Items of special interest. Example - Size per instantiation, never “deleted”, etc.)
	EcSbSubServer EcCsRegistry LoadingTool	RWDBMemTable	A Rogue Wave DB class that is a table of data residing in the program memory. After construction, an RWDBMemTable is no longer associated with a table in the database. An application can modify the data in an RWDBMemTable, but the changes are not propagated back to the database.	EcSbSubServer EcCsRegistry LoadingTool	not passed not passed not passed	EcSbSubServer EcCsRegistry LoadingTool	3 8 2	
	EcSeLoginProg EcSbSubServer LoadingTool EcCsRegistry	RWDBResult	A Rogue Wave DB class that represents a sequence of results whenever a database operation can potentially produce multiple SQL table expressions. Triggers that can cause results to be generated as a result of an INSERT, DELETE, or UPDATE statement.	EcSeLoginProg EcSbSubServer LoadingTool EcCsRegistry	not passed not passed not passed not passed	EcSeLoginProg EcSbSubServer LoadingTool EcCsRegistry	2 6 15 3	

**Table 4.1-1. Memory Management Table (20 of 26)**

Subsystem Name	Executable Name (M)	Key Classes	Description (M)	Where Created? (Executable/process name) (M)	Passed To (Executable/process name)	Where Deleted? (process name) (M)	Number of Instances (Example – 1 per granule)	Comments/Remarks (Items of special interest. Example - Size per instantiation, never “deleted”, etc.)
	EcSeLoginProg	RWDBReader	A Rogue Wave DB class that provides row-by-row access to tabular data.	EcSeLoginProg	not passed	EcSeLoginProg	13	
	EcSbSubServer			EcSbSubServer	not passed	EcSbSubServer	13	
	EcCsRegistry			EcCsRegistry	not passed	EcCsRegistry	8	
LoadingTool	LoadingTool			not passed	LoadingTool	5		
EcCsIdNameServer	EcCsIdNameServer			not passed	EcCsIdNameServer	2		
	EcSbGui	EcCIEventCollector	This class provides a collection mechanism for retrieving and manipulating multiple events.	EcSbGui	not passed	EcSbGui	1	
	EcSbGui	EcCISubscriptionCollector	This class provides a collection mechanism for retrieving and manipulating multiple subscriptions.	EcSbGui	not passed	EcSbGui	1	

**Table 4.1-1. Memory Management Table (21 of 26)**

Subsystem Name	Executable Name (M)	Key Classes	Description (M)	Where Created? (Executable/process name) (M)	Passed To (Executable/process name)	Where Deleted? (process name) (M)	Number of Instances (Example – 1 per granule)	Comments/Remarks (Items of special interest. Example - Size per instantiation, never “deleted”, etc.)
	EcCsMtMGateway EcCsMojoGateway EcCsEmailParser EcSbSubServer	DsCIESDTReferenceCollector	This class provides the primary interaction mechanism for client software. This class contains the specialized functions pertaining to management of state (the working collection on the server side) by mimicking that state on the client machine.	EcCsMtMGateway EcCsMojoGateway EcCsEmailParser EcSbSubServer	not passed not passed not passed not passed	EcCsMtMGateway EcCsMojoGateway EcCsEmailParser EcSbSubServer	1 1 1 1	

**Table 4.1-1. Memory Management Table (22 of 26)**

Subsystem Name	Executable Name (M)	Key Classes	Description (M)	Where Created? (Executable/process name) (M)	Passed To (Executable/process name)	Where Deleted? (process name) (M)	Number of Instances (Example – 1 per granule)	Comments/Remarks (Items of special interest. Example - Size per instantiation, never “deleted”, etc.)
<b>MSS</b>	EcAcOrderSrvr EcMsAcRegUserSrvr MsCsSurveyMgrServer	RWDBMemTable	A Rogue Wave DB class that is a table of data residing in the program memory. After construction, an RWDBMemTable is no longer associated with a table in the database. An application can modify the data in an RWDBMemTable, but the changes are not propagated back to the database.	EcAcOrderSrvr  EcMsAcRegUserSrvr  MsCsSurveyMgrServer	not passed  not passed  not passed	EcAcOrderSrvr  EcMsAcRegUserSrvr  MsCsSurveyMgrServer	2  1  6	

**Table 4.1-1. Memory Management Table (23 of 26)**

Subsystem Name	Executable Name (M)	Key Classes	Description (M)	Where Created? (Executable/process name) (M)	Passed To (Executable/process name)	Where Deleted? (process name) (M)	Number of Instances (Example – 1 per granule)	Comments/Remarks (Items of special interest. Example - Size per instantiation, never “deleted”, etc.)
	EcAcOrderSrvr	RWDBResult	A Rogue Wave DB class that represents a sequence of results whenever a database operation may potentially produce multiple SQL table expressions. Triggers that can cause results to be generated as a result of an INSERT, DELETE, or UPDATE statement.	EcAcOrderSrvr	not passed	EcAcOrderSrvr	13	
	EcMsAcRegUserSrvr			EcMsAcRegUserSrvr	not passed	EcMsAcRegUserSrvr	10	
	MsCsSurveyMgrServer			MsCsSurveyMgrServer	not passed	MsCsSurveyMgrServer	6	
	EcAcOrderSrvr	RWDBReader		EcAcOrderSrvr	not passed	EcAcOrderSrvr	16	
	EcMsAcRegUserSrvr			EcMsAcRegUserSrvr	not passed	EcMsAcRegUserSrvr	13	
	MsCsSurveyMgrServer			MsCsSurveyMgrServer	not passed	MsCsSurveyMgrServer	29	

**Table 4.1-1. Memory Management Table (24 of 26)**

Subsystem Name	Executable Name (M)	Key Classes	Description (M)	Where Created? (Executable/process name) (M)	Passed To (Executable/process name)	Where Deleted? (process name) (M)	Number of Instances (Example – 1 per granule)	Comments/Remarks (Items of special interest. Example - Size per instantiation, never “deleted”, etc.)
<b>INS</b>	EclnGUI, EclnInitPasswd	CsSeCryptoDes::DesEncrypt	Used to encrypt passwords.	EclnGUI, EclnInitPasswd	not passed	EclnGUI	Three instances per update to the InExternalData ProviderInfo table (EclnGUI). One instance for EclnInitPasswd.	EclnInitPasswd does not delete the instance, but it is a test driver. The amount of memory allocated is the size of the encrypted password.
	EclnGUI, EclnPolling, EclnReqMgr	CsSeCryptoDes::DesDecrypt	Used to decrypt passwords.	EclnGUI, EclnPolling, EclnReqMgr	not passed not passed not passed	EclnGUI, EclnPolling, EclnReqMgr	Three instances per retrieval from the InExternalData ProviderInfo table.	The amount of memory allocated is the size of the encrypted password.
	EclnGUI, EclnGran, EclnPolling, EclnReqMgr	InDataTypeTemplate	Used to access the InDataTypeTemplate table in the Ingest database. This table contains information about each data type that can be ingested.	EclnGUI, EclnGran, EclnPolling, EclnReqMgr	not passed not passed not passed not passed	EclnGUI, EclnGran, EclnPolling, EclnReqMgr	One instance	The memory is deallocated when the server comes down.

**Table 4.1-1. Memory Management Table (25 of 26)**

Subsystem Name	Executable Name (M)	Key Classes	Description (M)	Where Created? (Executable/process name) (M)	Passed To (Executable/process name)	Where Deleted? (process name) (M)	Number of Instances (Example – 1 per granule)	Comments/Remarks (Items of special interest. Example - Size per instantiation, never “deleted”, etc.)
	EclnGUI, EclnGran, EclnPolling, EclnReqMgr	InEDPAddressMap	Used to access the InEDPAddressMap table in the Ingest database. This table contains IP addresses, which can be mapped to external data provider names.	EclnGUI, EclnGran, EclnPolling, EclnReqMgr	not passed not passed not passed not passed	EclnGUI, EclnGran, EclnPolling, EclnReqMgr	One instance	The memory is deallocated when the server comes down.
	EclnGUI, EclnGran, EclnPolling, EclnReqMgr	InCurrentDataTypeMap	Used to access the InCurrentDataTypeMap table in the Ingest database. This table contains the default version id for each data type that can be ingested.	EclnGUI, EclnGran, EclnPolling, EclnReqMgr	not passed not passed not passed not passed	EclnGUI, EclnGran, EclnPolling, EclnReqMgr	One instance	The memory is deallocated when the server comes down.
	EclnGUI	InValRequestState	Used to access the InValRequestState table in the Ingest database. This table contains the valid request states.	EclnGUI	not passed	EclnGUI	One instance	
	EclnGUI	InValDataGranuleState	Used to access the InValDataGranuleState table in the Ingest database. This table contains the valid granule states.	EclnGUI	not passed	EclnGUI	One instance	

**Table 4.1-1. Memory Management Table (26 of 26)**

Subsystem Name	Executable Name (M)	Key Classes	Description (M)	Where Created? (Executable/process name) (M)	Passed To (Executable/process name)	Where Deleted? (process name) (M)	Number of Instances (Example – 1 per granule)	Comments/Remarks (Items of special interest. Example - Size per instantiation, never “deleted”, etc.)
	EclnGUI, EclnGran, EclnPolling, EclnReqMgr	InConfig	Used to store configuration parameters for Ingest.	EclnGUI, EclnGran, EclnPolling, EclnReqMgr	not passed not passed not passed not passed	EclnGUI, EclnGran, EclnPolling, EclnReqMgr	One instance	The memory is deallocated when the server comes down.
	EclnReqMgr	InGranuleServersQueue	Used to access the Ingest granule queue. EclnReqMgr uses the granule queue for dispatching granules to each EclnGran instance.	EclnReqMgr	not passed	EclnReqMgr	One instance	The memory is deallocated when the server comes down.
<b>CLS</b>	Not Applicable							
<b>Toolkit</b>	Not Applicable							

## 4.1 Data Server Subsystem Overview


The Data Server Subsystem (DSS) provides capabilities to store, search, retrieve, and distribute earth science and related data. The DSS provides data repositories and management capabilities to safely store data on a permanent basis. The DSS stages data needed for data processing by the Data Processing Subsystem (DPS) or for retrieval by users at external locations. The DSS organizes and stores its data by data types, and provides advanced search capabilities and processing services on those data types in support of earth science data users. The DSS distributes data to users either electronically or on physical media. It also includes administrative capabilities to operate and manage its hardware and software.

DSS functionality includes:

- The DSS stores (archives) the Ingest Subsystem (INS) ingested data and products created via the DPS
- The DSS receives service requests for data and data type services from external service requesters including the Data Management Subsystem (DMS), the Planning Subsystem (PLS), and the DPS
- The DSS provides (distributes) data in response to service requests, to the request originator, by means of electronic transfer. Alternatively, the subsystem can provide references to data as a Universal Reference (UR). The Product Distribution System (PDS) distributes data in response to originator service requests by means of physical media

### Data Server Subsystem Context


Figure 4.1-1 is the context diagrams for the DSS. The diagrams show the events DSS sends to other SDPS or CSMS subsystems and the events sent to DSS.

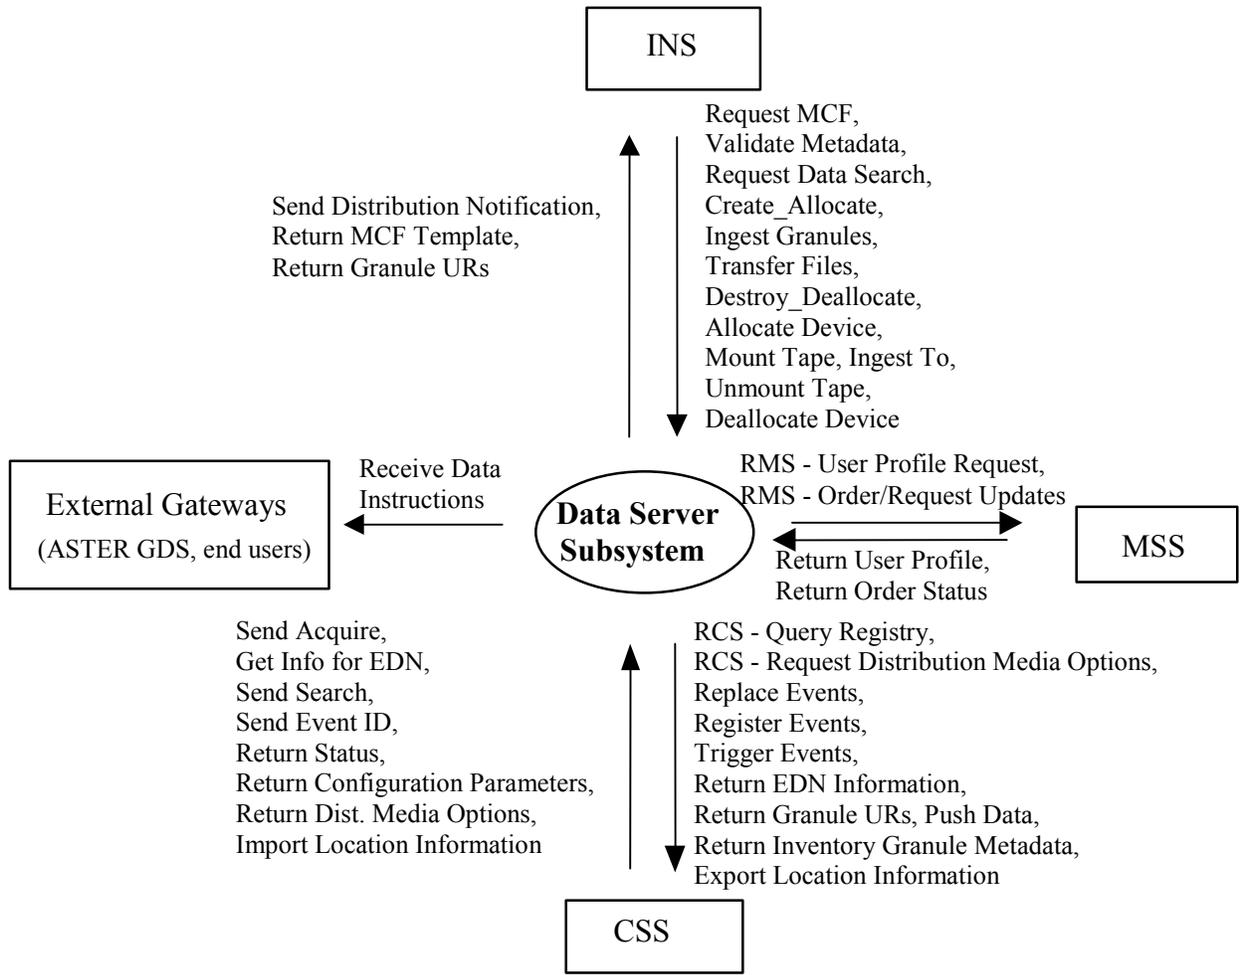

**Note:**  
**EDN** = Expedited Data Set Notification,  
**ID** = Identifier  
**MCF** = Metadata Configuration File,  
**RCS** = Request Communications Support,  
**RMS** = Request Management Services,  
**URs** = Universal References


The Science Data Server GUI is shown in the architecture diagram.

**Figure 4.1-1. Data Server Subsystem Context Diagram**

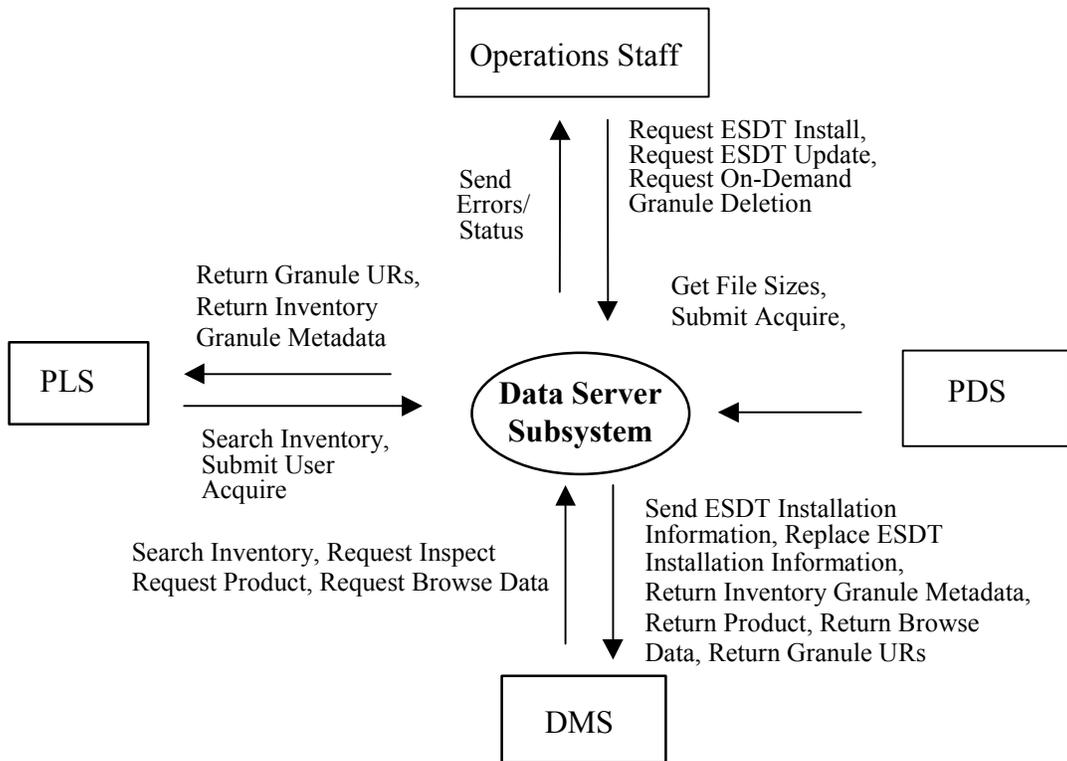

**Note:**  
**ESDT** = Earth Science Data Types,  
**URs** = Universal References  
 The Science Data Server GUI is shown in the architecture diagram.

**Figure 4.1-1. Data Server Subsystem Context Diagram (cont.)**

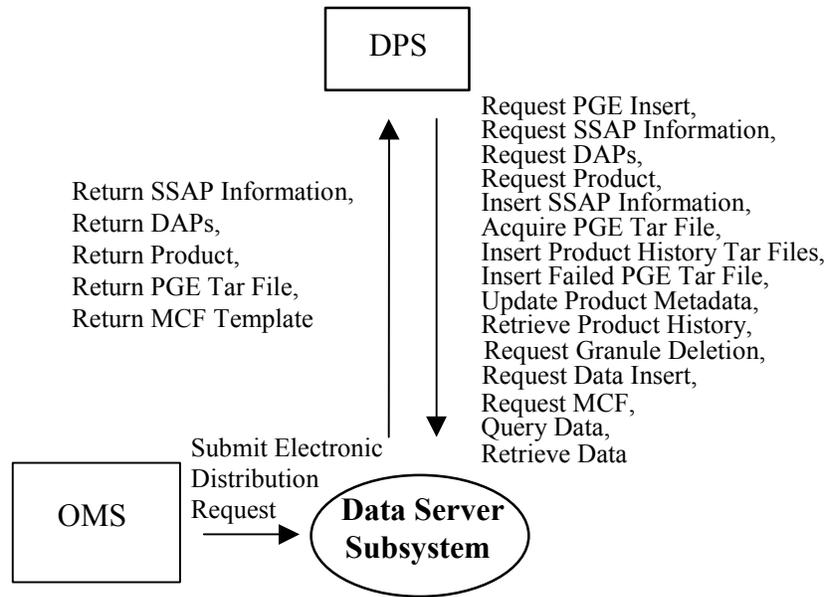

**Note:**  
**PGE** = Product Generation Executable,  
**SSAP** = Science Software Archive Package,  
**DAPs** = Delivered Algorithm Packages,  
**MCF** = Metadata Configuration File

The Science Data Server GUI is shown in the architecture diagram.

**Figure 4.1-1. Data Server Subsystem Context Diagram (cont.)**

Table 4.1-2 provides descriptions of the interface events shown in the Data Server Subsystem context diagrams.

**Table 4.1-2. Data Server Subsystem Interface Events (1 of 5)**

Event	Interface Event Description
Request MCF	The <b>INS</b> requests the Metadata Configuration File (MCF) from the DSS prior to a data insert request.
Validate Metadata	The <b>INS</b> populates the metadata files and sends a request to the DSS to validate the metadata files.
Request Data Search	The <b>INS</b> sends a search request to the DSS for a granule corresponding to a particular ESDT short name and version, which has a particular local granule id.
Create_Allocate	The <b>INS</b> sends requests to the DSS to allocate areas on the local staging disk to store ingested data.
Ingest Granules	The <b>INS</b> sends requests to the DSS to insert a particular file or files into the inventory and archive. Inserted data is accompanied by metadata. The metadata is catalogued in the SDSRV inventory as a granule of a particular ESDT short name and version. For the INS, this data can be algorithms, Level 0 (L0) data, standard products, ancillary data, correlative data or calibration data. All data insert requests are sent to the DSS.
Transfer Files	The <b>INS</b> sends requests to the DSS to transfer (copy) data files to a staging disk.
Destroy_Deallocate	The <b>INS</b> sends requests to the DSS to deallocate a staging disk area (to remove an existing staging disk area from usage).
Allocate Device	The <b>INS</b> sends requests to the DSS to allocate peripheral devices for data ingesting.
Mount Tape	The <b>INS</b> sends requests to the DSS to load tapes to hardware peripherals for reading the tapes.
Ingest To	The <b>INS</b> sends requests to the DSS to copy files from peripheral resources to staging disk areas.
Unmount Tape	The <b>INS</b> sends requests to the DSS to unload and detach tapes from hardware peripherals after reading or writing to the tapes.
Deallocate Device	The <b>INS</b> sends requests to the DSS to deallocate the previously allocated media resource.
Request Management Services	<p>The <b>MSS</b> provides a basic management library of services to the subsystems, implemented as client or server applications, using the CSS Process Framework. The basic management library of services includes:</p> <ul style="list-style-type: none"> <li>• <b>System startup and shutdown</b> - Please refer to the release-related, current version of the Mission Operations Procedures for the ECS Project document (611) and the current ECS Project Training Material document (625), identified in Section 2.2.1 of this document.</li> <li>• <b>User Profile Request</b> - The MSS receives requests from the DSS for user profile information such as e-mail address and shipping address from authorized users to support their processing activities.</li> <li>• <b>Order/Request Updates</b> - The <b>DSS</b> (DDIST CSCI) interfaces with the Accountability Management Service Order/Request Tracking to create/update the user product order request such as media id, quantity and type.</li> </ul>

**Table 4.1-2. Data Server Subsystem Interface Events (2 of 5)**

Event	Interface Event Description
Return User Profile	The <b>MSS</b> sends the user profile to the DSS for inventory searches, to request product orders, and to request subscriptions.
Return Order Status	The <b>MSS</b> provides order ids and order status information (Request ID for PLS) to the CLS, PLS and CSS for products requested by users.
Request Communications Support	<p>The <b>CSS</b> provides a library of services available to each subsystem. The subsystem services required to perform specific assignments are requested from the CSS. These services include:</p> <ul style="list-style-type: none"> <li>• CCS Middleware Support</li> <li>• Database Connection Services</li> <li>• Name/Address Services</li> <li>• Server Request Framework (SRF)</li> <li>• Universal Reference (UR)</li> <li>• Error/Event Logging</li> <li>• Fault Handling Services</li> <li>• Mode Information</li> <li>• Query Registry - Retrieving the requested configuration attribute-value pairs from the Configuration Registry</li> <li>• Request Distribution Media Options from the Configuration Registry</li> </ul>
Replace Events	The <b>CSS</b> Subscription Server receives the updated subscription events with updated qualifiers for an Earth Science Data Type (ESDT) from the DSS when an ESDT is updated. This event replaces the original event in the CSS Subscription Server.
Register Events	The <b>CSS</b> Subscription Server receives the subscription events for an Earth Science Data Type (ESDT) from the DSS when an ESDT is installed into the system or when an ESDT is updated by adding additional events.
Trigger Events	The <b>CSS</b> is notified by the DSS (via an event trigger) when a subscription event occurs on an ESDT Service.
Return EDN Information	The <b>CSS</b> receives and uses the Expedited Data Set Notification (EDN) information from the DSS to send messages to users at the ASTER Ground Data System (GDS).
Return Granule URs	The <b>CSS</b> and <b>INS</b> receive Earth Science Data Type (ESDT) Universal References (URs) for the requested granules from the DSS.
Push Data	The DSS pushes data (i.e., EDS), via the FTP service and an FTP Daemon, to the <b>CSS</b> (ASTER DAR Gateway CSC) for data distribution per user request. A signal file is also sent to indicate the completion of the file transfer by particular ESDTs that function this way.
Return Inventory Granule Metadata	The <b>CSS</b> (MTMGW Server) receives the inventory granule metadata identifying the scene within the granule from the DSS based on an inventory search request.
Export Location Information	The DSS stores physical and logical server location information in the <b>CSS</b> .
Send Acquire	The <b>CSS</b> creates an “acquire” (instruction to obtain data) and sends it to the DSS via a CCS Middleware call. This is similar to the “Request Product” interface event, except it applies to EDOS expedited data.

**Table 4.1-2. Data Server Subsystem Interface Events (3 of 5)**

Event	Interface Event Description
Get Info for EDN	The <b>CSS</b> requests the EDN information from the DSS to send messages to users at the ASTER GDS.
Send Search	The <b>CSS</b> sends requests to the DSS, on behalf of the SIPS, to get qualified granule URs returned.
Send Event ID	The <b>CSS</b> sends Event Ids to the DSS when ESDTs are installed or when ESDTs are updated by adding additional events.
Return Status	The <b>CSS</b> returns status to the DSS to simply indicate that the request was received, not that the action succeeded.
Return Configuration Parameters	The DSS receives the configuration parameters and associated values from the Registry Server within the <b>CSS</b> .
Return Dist. Media Options	The DSS receives the requested distribution media options from the <b>CSS</b> .
Import Location Information	The DSS retrieves physical and logical server location information from the <b>CSS</b> .
Receive Data Instructions	The <b>External Gateways</b> or other external users receive instructions (assembled by the DSS) to send data via the CSS. The DSS requests data to be pushed, via the File Transfer Protocol (FTP) service and followed by a signal file, to the destination specified in an acquire instruction (by particular ESDTs that function this way).
Send Distribution Notification	The <b>INS</b> receives a distribution notification, via e-mail, from the DSS when data being distributed is to be ingested.
Return MCF Template	The <b>INS</b> receives the MCF template to populate, from the DSS, as part of the GetMCF service call.
Return Granule URs	The <b>INS</b> receives the Earth Science Data Type (ESDT) Universal References (URs) for the requested granules from the DSS.
Request ESDT Install	The <b>Operations Staff</b> sends ESDT installation information to the DSS for adding descriptor, Dynamic Link Library (DLL), and version id for a new Earth Science Data Type.
Request ESDT Update	The <b>Operations Staff</b> sends updated ESDT information to the DSS for adding updated descriptor and Dynamic Link Library (DLL) information for an existing ESDT.
Request On-Demand Granule Deletion	The <b>Operations Staff</b> sends requests to the DSS to delete science granules from the archive and inventory or just the archive. The associated PH, QA and Browse granules can also be deleted.
Get File Sizes	The <b>Product Distribution System (PDS)</b> Subsystem sends a request to the DSS to get file sizes.
Submit Acquire	The <b>PDS</b> submits an acquire request to the DSS to retrieve data granules of interest.
Send ESDT Installation Information	The <b>DMS</b> Data Dictionary receives ESDT installation information from the DSS, whenever a new ESDT is installed. This data consists of Inventory and Collection level metadata.

**Table 4.1-1. Data Server Subsystem Interface Events (4 of 5)**

Event	Interface Event Description
Replace ESDT Installation Information	The <b>DMS</b> Data Dictionary receives updated ESDT information from the DSS, whenever an ESDT is updated. This data consists of updated Inventory and Collection level metadata.
Return Inventory Granule Metadata	The <b>DMS</b> and <b>PLS</b> receive the inventory granule metadata identifying the scene within the granule based on an inventory search request sent to the DSS.
Return Product	The <b>DMS</b> receives products (including Landsat 7 data archived within the ECS) from the DSS based upon a product request. The ASTER GDS can only receive Landsat 7 fixed scenes because they do not have the means to handle floating scenes.
Return Browse Data	The <b>DMS</b> receives browse data associated with a particular granule from the DSS.
Return Granule URs	The <b>DMS</b> and <b>PLS</b> receive Earth Science Data Type (ESDT) Universal References (URs) for the granules from the DSS.
Search Inventory	The <b>DMS</b> and <b>PLS</b> send Inventory Search Requests to the DSS to search the SDPS Inventory (metadata).
Request Inspect	The <b>DMS</b> sends a request for an inspection of granule metadata to the DSS in support of a price estimate request.
Request Product	The <b>DMS</b> sends requests to the DSS for a product order from an external user to be distributed by the DSS. This product request includes requests for Landsat 7 products archived within the ECS.
Request Browse Data	The <b>DMS</b> submits requests for Browse data to the DSS to acquire reduced resolution products to support a product request.
Submit User Acquire	The <b>PLS</b> submits an acquire command to the DSS on behalf of the user. The user gets a response via the DSS upon data distribution.
Send Errors/Status	The <b>Operations Staff</b> receives error conditions and status of data distributions from the DSS.
Request PGE Insert	The <b>DPS</b> sends requests to the DSS to insert data that defines a Product Generation Executive (PGE) and allows it to be scheduled and executed.
Request SSAP Information	The <b>DPS</b> sends requests to the DSS for SSAP information, including names of existing SSAPs and the information associated with a specific SSAP.
Request DAPs	The <b>DPS</b> requests Data Archive Packages (DAPs) based on URs from the DSS.
Request Product	The <b>DPS</b> sends requests, to the DSS, for particular data granules to be pushed, via the FTP service, onto the DPS science processor as input for data processing or for SSIT work.
Insert SSAP Information	The <b>DPS</b> sends requests to the DSS to insert SSAP information, via the DPS SSAP GUI by the Operations Staff, including SSAP name, SSAP version number, PGE name, PGE version number, and SSAP Acceptance Date.

**Table 4.1-1. Data Server Subsystem Interface Events (5 of 5)**

Event	Interface Event Description
Acquire PGE Tar File	The <b>DPS</b> acquires a tar file for any PGE not currently local to the science processor from the DSS. The executable is extracted from the tar file and used during PGE execution.
Insert Product History Tar Files	The <b>DPS</b> sends a request to the DSS to insert the PGE Production History Tar File resulting outputs for permanent archive after the PGE has successfully completed executing.
Insert Failed PGE Tar File	After an unsuccessful execution of a PGE, the <b>DPS</b> obtains the Tar file containing the PGE log files, core dump (if any), PCF and other files, and requests the files be inserted into the DSS for permanent archive.
Update Product metadata	The <b>DPS</b> (the Operations Staff) sends requests to update product metadata in the DSS using the QA Monitor GUI.
Retrieve Product History	The <b>DPS</b> (the Operations Staff using the QA Monitor GUI) submits requests to the DSS to transfer the Production History tar file from the Science Data archives to the user's host machine.
Request Granule Deletion	The <b>DPS</b> sends delete requests to the DSS for particular granules (interim data) in the metadata (the SDPS inventory).
Request Data Insert	The <b>DPS</b> sends insert requests to the DSS for a particular file or files (into the SDPS inventory and archives). Inserted data is accompanied by metadata. The metadata is catalogued in the SDSRV inventory as a granule of a particular ESDT short name and version. These files can be processing output, static files received with PGEs, PGE Tape Archive (TAR) files, Algorithm Packages (APs), Science Software Archive Packages (SSAPs) or Delivered Algorithm Packages (DAPs), failed PGE tar files, or production history files.
Request MCF	The <b>DPS</b> requests the MCF from the DSS prior to a data insert request.
Query Data	The <b>DPS</b> submits search requests to the DSS for granules that match the user-supplied selection criteria: data type and begin/end date. Results are displayed to the user at a GUI in the DPS.
Retrieve Data	The <b>DPS</b> sends retrieval requests, to the DSS, for a particular data granuleId. The product is transferred (pushed), via the File Transfer Protocol (FTP) service, onto the DPS science processor and used as input for Product Generation Executive (PGE) processing or for Science Software Integration and Test (SSIT) work.
Submit Electronic Distribution Request	The <b>OMS</b> sends requests to the DSS to distribute ECS data electronically via an FTP Pull or FTP Push.
Return SSAP Information	The <b>DPS</b> receives lists of SSAPs and related information from the DSS.
Return DAPs	The DAPs are placed on a local <b>DPS</b> disk by the DSS.
Return Product	The data granules requested by the <b>DPS</b> are sent from the DSS.
Return PGE Tar File	After an unsuccessful execution of a PGE, the <b>DPS</b> obtains the Tar file containing the PGE log files, core dump (if any), Process Control File (PCF) and other files, and requests the files be inserted into the DSS for permanent archive.
Return MCF Template	The DSS provides the MCF template, to the <b>DPS</b> , to populate as part of the GetMCF service call.

## Data Server Subsystem Structure

The DSS is three CSCIs:

- The Science Data Server (SDSRV) CSCI manages and provides user access to collections of non-document (non hard copy) earth science data, extracts and modifies data by request, accepts browse, search, and retrieval requests from users, and catalogs data insert requests from other SDPS or CSMS CSCIs, CSCs, and processes. The SDSRV CSCI manages earth science data as logical collections of related data, via interfaces independent of data formats and hardware configurations inherent in underlying storage technologies. The SDSRV manages interactive sessions with service requesters and informs the service requester of the availability of data and services via the IOS.
- The Data Distribution (DDIST) CSCI monitors and controls processing for distribution requests. Data Distribution processing consists of directing the STMGT CSCI to place data for distribution in working storage, creating packing lists, directing the STMGT CSCI to "FtpPush" or "FtpPull", and sending notifications for completed distribution requests. The DDIST CSCI accepts requests from the SDSRV CSCI. Electronic distribution can be requested via an FTP push or pull. With push, the DDIST CSCI uses network resources managed by the STMGT CSCI to transfer the data to a remote destination specified by the requester. For pull, the data is placed in an area managed by the STMGT CSCI, from which the requester can retrieve the data.
- The Storage Management (STMGT) CSCI stores and manages data, and retrieves data files from the archives for other science data processing software. The STMGT CSCI provides an interface to make implemented changes in new data storage technologies transparent to users and without interfering with ECS systems outside the STMGT CSCI. The STMGT CSCI performs quality assurance processing and files recovery services. The STMGT CSCI also provides management of storage resources and prepares data for distribution.

The Data Server Subsystem hardware consists of the following four Hardware Configuration Items (HWCIs):

- Access Control and Management

The Access Control and Management HWCI (ACMHW) is hardware to support the Ingest and Data Server Subsystems' software to directly interact with users. The ACMHW provides a level of security by isolating other hardware items from external software access.

- Working Storage

The Working Storage HWCI (WKSHW) is hardware to provide high-performance storage of large volumes of data on a temporary basis.

- Data Repository

The Data Repository HWCI (DRPHW) is hardware to provide high-capacity storage for long-term storage of data files.

- Distribution and Ingest Peripherals

The Distribution and Ingest Peripherals HWCI (DIPHW) is hardware to provide support to ingest and distribution via physical media.

Detailed information on hardware/software mapping, hardware diagrams, disk partitioning, etc., can be found in 920-TDx-00x, the 921-TDx-00x, and the 922-TDx-00x series of baseline documents. These documents are located at the web site <http://pete.hitc.com/baseline/index.html> and click on the Technical Documents button.

### **Use of COTS in the Data Server Subsystem**

- RogueWave's Tools.h++

The Tools.h++ class libraries provide libraries of object strings and collections. These class libraries are statically linked and delivered with the custom code installation.

- RogueWave's DBTools.h++

The DBTools.h++ C++ class libraries interact with the Sybase database Structured Query Language (SQL) server and buffer the processes from the relational database used. These class libraries are statically linked and delivered with the custom code installation.

- Rogue Wave's Net.h++

ToolsPro.h++ is a C++ class library, which includes the net.h++ class library, which provides an object-oriented interface to Inter-Process Communication (IPC) and network communication services. The Net.h++ framework enables developed code to be portable to multiple operating systems and network services. These libraries must be installed with the STMGT software to support interaction with other subsystems.

- Integrated Computer Solutions (ICS) Builder Xcessory

The Builder Xcessory GUI builder tool modifies the displays. The Builder Xcessory generates the C++ code to produce the Maintenance Tool (Mtool) display at run time. There is no operational part of the Builder Xcessory needed at run-time.

- Sybase Adaptive Enterprise Server (ASE)

The Sybase ASE provides the capabilities to insert, update and delete database contents. The Sybase ASE must be operational to execute search and insert requests for metadata.

- Autometric's Spatial Query Server

The Spatial Query Server (SQS) provides the capability to store and search spatial metadata. SQS has spatial indexing to search on spatial metadata for the SDSRV.

- Sybase Open Client / CT\_LIB  
The Sybase Open Client provides access between DSS custom code and the Sybase ASE DBMS.
- University of Illinois' Hierarchical Data Format (HDF)  
HDF provides EOS extended capabilities for sub-setting services with the SDSRV CSCI.
- University of Colorado's Object Description Language (ODL)  
ODL provides a general architecture, independent means of passing metadata files between subsystems.
- CCS Middleware Client  
CCS Middleware Client provides DSS with communications between other subsystems. CCS Middleware can reside on one or both sides of the interface. An instance must be installed on the platform where DSS resides. Although the CCS Middleware Client is part of CSS, this COTS product must be installed for DSS to run in the SDPS operational and test environment.

### **Error Handling and processing**

EcUtStatus is a class used throughout the ECS custom code for general error reporting. It is almost always used as a return value for functions and allows detailed error codes to be passed back up function stacks.

DsShError is a Science Data Server specific class used mainly for exception handling.

DsShErrorDetails is a Science Data Server class that can be used to convert error details (in an EcUtStatus object) into more meaningful text messages.

The Science Data Server uses two main mechanisms for error handling.

#### 1. Return Values

Functions can return an EcUtStatus object, which can be used to indicate a general success/failure status. Also, more detailed information on the exact reason for the failure can be provided. For example, a granule cannot be acquired because it has restricted access privileges. This is the most widely used mechanism within the Science Data Server and in general these errors get propagated back up to the top-level functions with ALOG error messages being generated along the way.

#### 2. Exceptions

Some functions (for example, class constructors) cannot return values to indicate success or failure. These functions may throw exceptions, usually instances of the DsShError class. These errors are usually caught by other functions at a low level and converted into EcUtStatus return values (as described in 1).

In addition, the `DsShErrorDetails` class can be used to map error values (as contained in an `EcUtStatus` object) into text messages. This enables better reporting of errors in the Science Data Server logs.

Currently, the Science Data Server client interface only supports returning error messages back to client programs, along with a generic success/failed status.

For writing messages to the Applications Log (ALOG), the following functions are used:

`DsLgLogError` sends a message to the ALOG at severity level 1. For example, `DsLgLogError ("DsMdMetadataCheckpoint1", "Bad granule UR");`

`DsLgLogWarning` sends a message to the ALOG at severity level 2. For example, `DsLgLogWarning ("DsMdMetadataCheckpoint2", "Unable to retrieve granule metadata");`

`DsLgLogInformational` sends a message to the ALOG at severity level 3. For example, `DsLgLogInformational ("DsMdMetadataCheckpoint3", "Failed to construct granule");`

For writing messages to the debug log, the following macros are used:

`PF_STATUS` writes a message at a "log level" of 1 to the debug log. For example, `PF_STATUS {cerr << "Issue rpc to STMGT" << endl;}`

`PF_VERBOSE` writes a message at a "log level" of 2 to the debug log. For example, `PF_VERBOSE {cerr << "Request received from client" << endl;}`

`PF_DEBUG` writes a message at a "log level" of 3 to the debug log. For example, `PF_DEBUG {cerr << "Saved request to database" << endl;}`

The class `EcUtStatus` is used to hold the actual error number. The `EcUtStatus` object is returned to the DDIST clients when the request is complete.

The DDICT CSCI uses two main mechanisms for error handling.

#### 1. Return Values

Functions can return an `EcUtStatus` object, which can be used to indicate a general success/failure status. Also, more detailed information on the exact reason for the failure can be provided. This is the most widely used mechanism within the DDICT and in general these errors get propagated back up to the top-level functions with ALOG error messages being generated along the way.

## 2. Exceptions

Some functions (for example, class constructors) cannot return values to indicate success or failure. These functions may throw exceptions, usually instances of the `DsShError` class. These errors are usually caught by other functions at a low level and converted into `EcUtStatus` return values (as described in 1).

In addition, the `DsShErrorDetails` class can be used to map error values (as contained in an `EcUtStatus` object) into text messages. This enables better reporting of errors in the DDIST logs.

Currently, the DDIST client interface only supports returning error messages back to client programs, along with a generic success/failed status.

For writing messages to the Applications Log (ALOG), the following functions are used:

`EcLgLogError` sends a message to the ALOG at severity level 1. For example,

```
catch (DsShError& err)
```

```
{ EcLgLogError ("DsDdSchedulerExecuteFunctionError" , 0, err.GetMsg());}
```

`EcLgLogInformational` sends a message to the ALOG at severity level 3. For example,

```
EcLgLogInformational ("ConfigVarMissing",status.GetLogMessageLink(),
```

```
"EcCUtRpcClientIDConfigTag var not set in Config File.");
```

For writing messages to the debug log, the following macros are used:

`PF_STATUS` writes a message at a "log level" of 1 to the debug log. For example, `PF_STATUS`

```
{cerr << "DsDdCBCache::Create Creating first instance." << endl;}
```

`PF_VERBOSE` writes a message at a "log level" of 2 to the debug log. For example,

```
PF_VERBOSE {cerr << "Calling DsStArchive::Create. ReqID | FullArchiveID:\n"
```

```
<< myRequestID <<" | " << FullArchiveID << " and\n"
```

```
<< "RpcID = " << RpcId_CR.AsString() << endl;}
```

`PF_DEBUG` writes a message at a "log level" of 3 to the debug log. For example,

```
PF_DEBUG {cerr << "DsDdDistRequestS::SetPriority. Request: "
```

```
<< myRequestID << " Priority: " << Priority << endl;}
```

The Storage Management (STMGT) CSCI uses the following classes to deal with errors:

The class EcUtStatus is used to hold the actual error number when an error occurs. The EcUtStatus object is returned to the STMGT clients when the request is complete. The class DsStErrorDetails is used to extract the error type and severity information from the EcUtStatus class.

The class DsStLogging is used throughout the STMGT code to control the writing of error messages to the application log files and debug log files. This class uses the ECS standard logging functions and macros. Errors can also be logged to the DsStEventLog table within the STMGT database. These errors can be viewed with the STMGT GUI. These errors are periodically removed by the DsStRequestManager Server / GRCleanup Stored Procedure.

Here is an example of how logging is used:

```
EcUtStatus status;
.
.
.
if (somethingWentWrong)
{
    ourDsStLogging.LogAndSetError(status, DsEStInternalSybError,
    "DBIF:FetchQueryResult: ct_fetch failed");
}
```

The program EcDsStErrorFilesGenerator is used to load the various error codes used by STMGT into the STMGT database.


#### **4.1.1 Science Data Server Software Description**

##### **4.1.1.1 Science Data Server Functional Overview**

The SDSRV CSCI provides the SDPS with a catalog of Earth Science Data holdings, and the Earth Science Data Type services that operate on the data. The SDSRV CSCI provides a catalog of metadata describing the archived data holdings of the SDPS and provides mechanisms to acquire the data from the archive. The SDSRV CSCI also provides data type services on the catalog and a data reduction or sub-setting and reformatting services.

#### 4.1.1.2 Science Data Server Context


Figure 4.1-2 the SDSRV CSCI context diagrams. The diagrams show the events sent to the SDSRV CSCI and the events the SDSRV CSCI sends to other CSCIs. The events have been grouped by CSCI including the Storage Management and Data Distribution functions of the DSS.

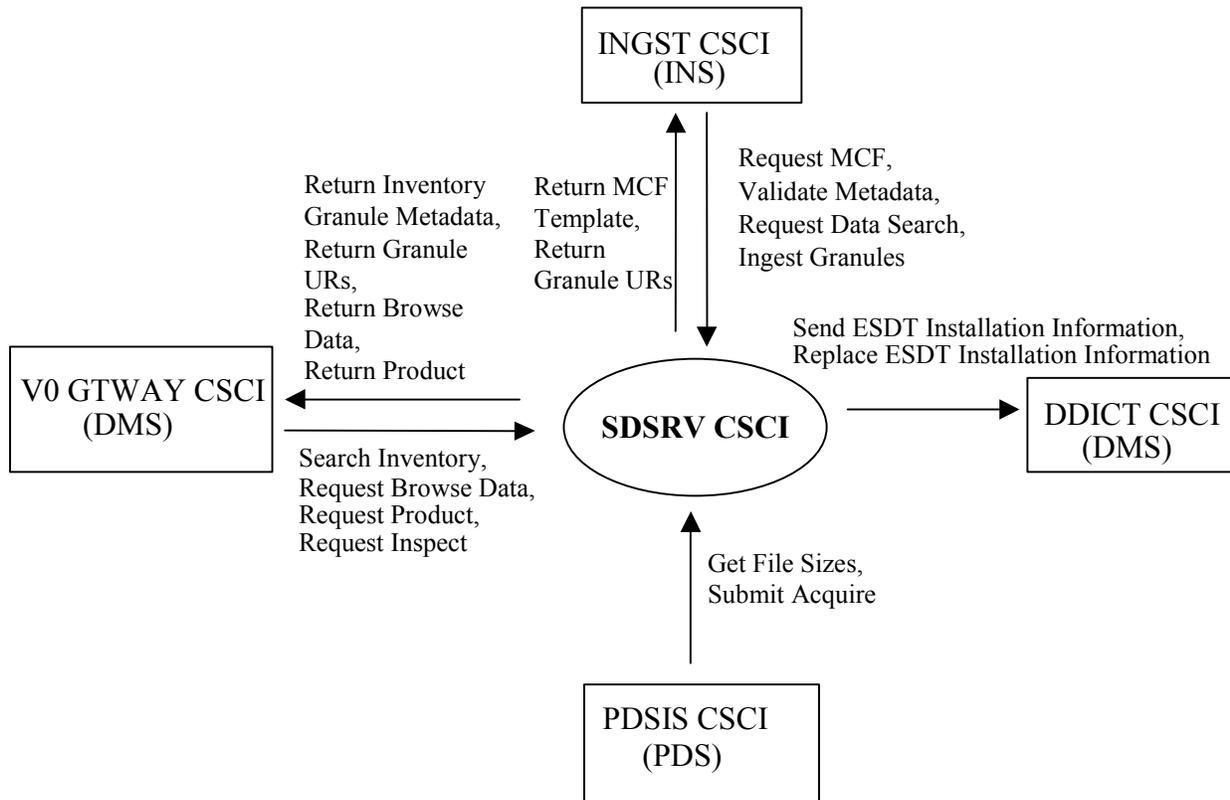

**Note:**  
**ESDT** = Earth Science Data Type,  
**MCF** = Metadata Configuration File,  
**URs** = Universal References,  
**PDSIS** = Product Distribution System Internal Server,  
**DN** = Data Notification


The Science Data Server GUI is shown in the architecture diagram.

**Figure 4.1-2. SDSRV CSCI Context Diagram**

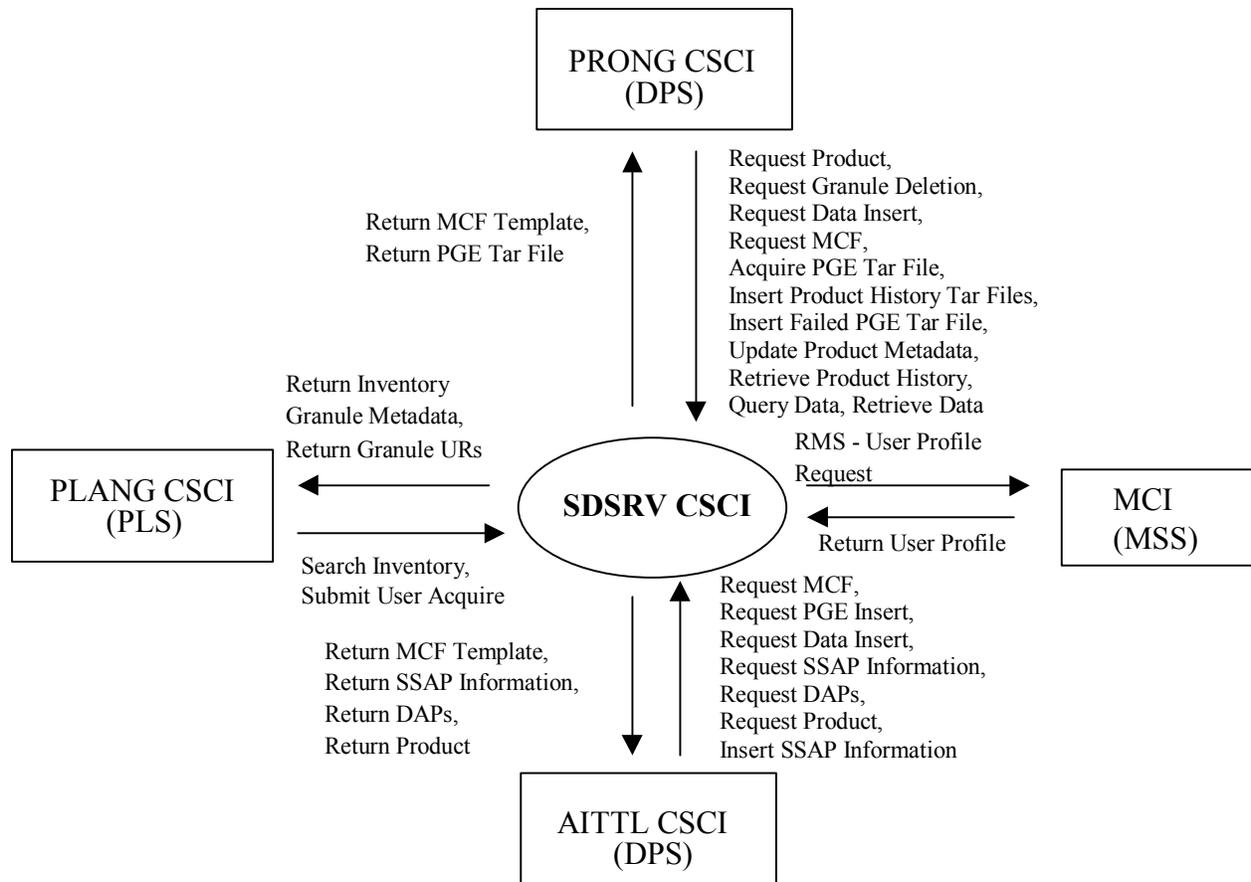

**Note:**  
**RMS** = Request Management Services,  
**URs** = Universal References,  
**PGE** = Product Generation Executable,  
**SSAP** = Science Software Archive Package,  
**DAPs** = Delivered Algorithm Packages,  
**MCF** = Metadata Configuration File  
 The Science Data Server GUI is shown in the architecture diagram.


**Figure 4.1-2. SDSRV CSCI Context Diagram (cont.)**

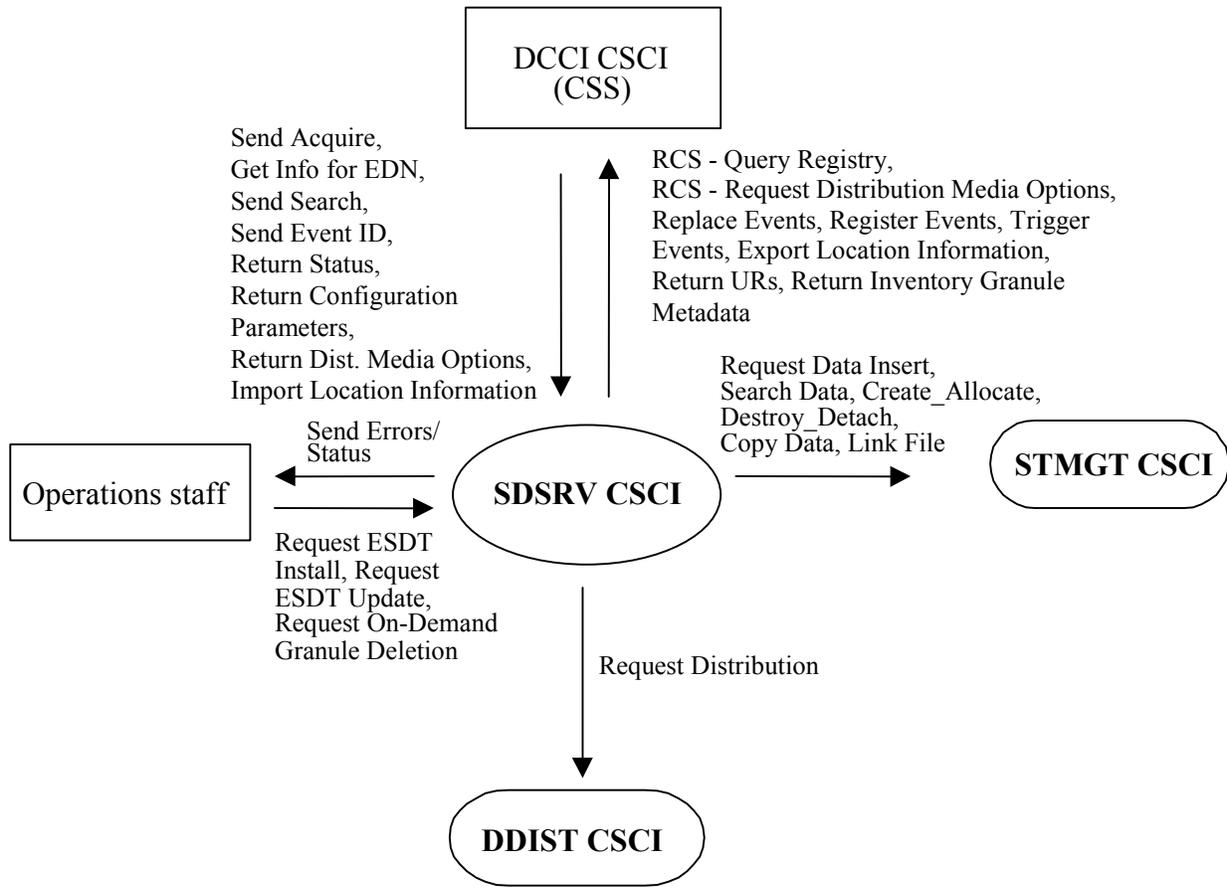

**Note:**  
**RCS** = Request Communications Support,  
**EDN** = Expedited Data Set Notification,  
**ESDT** = Earth Science Data Type,  
**ID** = Identifier

The Science Data Server GUI is shown in the architecture diagram.

**Figure 4.1-2. SDSRV CSCI Context Diagram (cont.)**

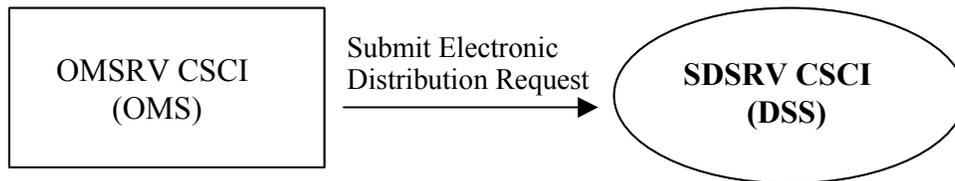

**Figure 4.1-2. SDSRV CSCI Context Diagram (cont.)**

Table 4.1-3 provides descriptions of the interface events shown in the SDSRV CSCI context diagrams.

**Table 4.1-3. SDSRV CSCI Interface Events (1 of 6)**

Event	Interface Event Description
Request MCF	The <b>INGST CSCI</b> requests the Metadata Configuration File (MCF) template, from the SDSRV CSCI, for each input or output data type, respectively, prior to a data insert request. The SDSRV CSCI provides the MCF information as part of the GetMCF service call.
Validate Metadata	The <b>INGST CSCI</b> populates the metadata files and sends a request to the SDSRV CSCI to validate the metadata files.
Request Data Search	The <b>INGST CSCI</b> sends a search request to the SDSRV CSCI for a granule corresponding to a particular ESDT short name and version, which has a particular local granule id.
Ingest Granules	The <b>INGST CSCI</b> sends requests to the SDSRV CSCI to insert a particular file or files into the inventory and archive. Inserted data is accompanied by metadata. The metadata is catalogued in the SDSRV inventory as a granule of a particular ESDT short name and version. For the <b>INGST CSCI</b> , this data can be algorithms, Level 0 (L0) data, standard products, ancillary data, correlative data or calibration data. All data insert requests are sent to the <b>STMGT CSCI</b> from the SDSRV CSCI.
Send ESDT Installation Information	The <b>DDICT CSCI</b> receives ESDT installation information from the SDSRV CSCI, whenever a new ESDT is installed. This data consists of Inventory and Collection level metadata.
Replace ESDT Installation Information	The <b>DDICT CSCI</b> receives updated ESDT information from the SDSRV CSCI, whenever an ESDT is updated. This data consists of Inventory and Collection level metadata. The updated information replaces the ESDT information in the <b>DDICT CSCI</b> .
Get File Sizes	The <b>PDSIS CSCI</b> sends a request to the SDSRV CSCI to get file sizes.
Submit Acquire	The <b>PDSIS CSCI</b> submits an acquire request to the SDSRV CSCI to retrieve data granules of interest.
Search Inventory	The <b>V0 GTWAY CSCI</b> sends inventory search requests to the SDSRV CSCI to search the SDPS Inventory (metadata).
Request Browse Data	The <b>V0 GTWAY CSCI</b> submits requests for browse data to the SDSRV CSCI to acquire reduced resolution products to support a product request.
Request Product	The <b>V0 GTWAY CSCI</b> sends requests to the SDSRV CSCI for a product order from an external user to be distributed by the <b>DDIST CSCI</b> upon receipt of the data from the <b>STMGT CSCI</b> . This product request includes requests for Landsat 7 products archived within the ECS.
Request Inspect	The <b>V0 GTWAY CSCI</b> sends a request for an inspection of granule metadata to the SDSRV CSCI in support of a price estimate request.
Return Inventory Granule Metadata	The <b>V0 GTWAY CSCI</b> receives the inventory granule metadata identifying the scene within the granule based on an inventory search request sent to the SDSRV CSCI.

**Table 4.1-3. SDSRV CSCI Interface Events (2 of 6)**

Event	Interface Event Description
Return Granule URs	The <b>V0 GTWAY CSCI</b> and <b>INGST CSCI</b> receive Earth Science Data Type (ESDT) Universal References (URs) for the granules from the SDSRV CSCI.
Return Browse Data	The <b>V0 GTWAY CSCI</b> receives browse data associated with a particular granule from the SDSRV CSCI.
Return Product	The <b>V0 GTWAY CSCI</b> receives products (including Landsat 7 data archived within the ECS) from the SDSRV CSCI based upon a product request. The ASTER GDS can only receive Landsat 7 fixed scenes because they do not have the means to handle floating scenes.
Return MCF Template	The <b>INGST CSCI</b> receives the template to populate as part of the GetMCF service call to the SDSRV CSCI.
Request Product	The <b>PRONG CSCI</b> sends requests, to the SDSRV CSCI, for particular data granules to be pushed, via the FTP service, onto the DPS science processor as input for data processing or for SSIT work.
Request Granule Deletion	The <b>PRONG CSCI</b> sends delete requests to the SDSRV CSCI for particular granules (interim data) in the metadata (the SDPS inventory).
Request Data Insert	The <b>AITTL</b> and <b>PRONG CSCIs</b> send insert requests to the SDSRV CSCI for a particular file or files (into the SDPS inventory and archives). Inserted data is accompanied by metadata. The metadata is catalogued in the SDSRV inventory as a granule of a particular ESDT short name and version. These files can be processing output, static files received with PGEs, PGE Tape Archive (TAR) files, Algorithm Packages (APs), Science Software Archive Packages (SSAPs) or Delivered Algorithm Packages (DAPs), failed PGE tar files, or production history files.
Request MCF	The <b>PRONG</b> and <b>AITTL CSCIs</b> request the Metadata Configuration File (MCF), from the SDSRV CSCI, for each input or output data type, respectively, prior to a data insert request. The SDSRV CSCI provides the MCF information as part of the GetMCF service call. Also, the <b>PRONG CSCI</b> can request from the SDSRV CSCI the MCF for a particular ESDT short name prior to a data insert request.
Acquire PGE Tar File	The <b>PRONG CSCI</b> acquires a tar file for any PGE not currently local to the science processor from the SDSRV CSCI. The executable is extracted from the tar file and used during PGE execution.
Insert Product History Tar Files	The <b>PRONG CSCI</b> sends a request to the SDSRV CSCI to insert the PGE Production History Tar File resulting outputs for permanent archive after the PGE has successfully completed executing.
Insert Failed PGE Tar File	After an unsuccessful execution of a PGE, the <b>PRONG CSCI</b> obtains the Tar file containing the PGE log files, core dump (if any), PCF and other files, and requests the files be inserted into the SDSRV CSCI for permanent archive.
Update Product Metadata	The <b>PRONG CSCI</b> (the Operations Staff using the QA Monitor GUI) sends requests to update product metadata in the SDSRV CSCI.

**Table 4.1-3. SDSRV CSCI Interface Events (3 of 6)**

Event	Interface Event Description
Retrieve Product History	The <b>PRONG CSCI</b> (the Operations Staff using the QA Monitor GUI) submits requests to the SDSRV CSCI to transfer the Production History tar file from the Science Data archives to the user's host machine.
Query Data	The <b>PRONG CSCI</b> submits requests of this type to the SDSRV CSCI. It searches the archive for granules that match the user-supplied selection criteria: data type and begin/end date. Results are displayed to the user at a GUI in the PRONG CSCI.
Retrieve Data	The <b>PRONG CSCI</b> sends retrieval requests, to the SDSRV CSCI, for a particular data granuleId. The product is transferred (pushed), via the FTP service, onto the DPS science processor and used as input for PGE processing or for SSIT work.
Request Management Services	The <b>MCI</b> provides a basic management library of services to the CSCIs, implemented as client or server applications, using the DCCI CSCI Process Framework. The basic management library of services includes: <ul style="list-style-type: none"> <li>• <b>System startup and shutdown</b> - Please refer to the release-related, current version of the Mission Operations Procedures for the ECS Project document (611) and the current ECS Project Training Material document (625), identified in Section 2.2.1 of this document</li> <li>• <b>Request User Profile</b> - The MCI receives requests from the SDSRV CSCI for user profile information such as e-mail address and shipping address from authorized users to support their processing activities</li> </ul>
Return User Profile	The <b>MCI</b> sends the user profile to the SDSRV CSCI for inventory searches, to request product orders, and to request subscriptions.
Request PGE Insert	The <b>AITTL CSCI</b> sends requests to the SDSRV CSCI to insert data that defines a PGE and allows it to be scheduled and executed.
Request SSAP Information	The <b>AITTL CSCI</b> sends requests to the SDSRV CSCI for SSAP information, including names of existing SSAPs and the information associated with a specific SSAP.
Request DAPs	The <b>AITTL CSCI</b> requests DAPs based on URs from the SDSRV CSCI.
Request Product	The <b>AITTL CSCI</b> sends requests to the SDSRV CSCI to push data granules, via the FTP service, onto the DPS science processor as input for data processing or SSIT work. This product request includes requests for Landsat 7 raw data archived within the ECS.
Insert SSAP Information	The <b>AITTL CSCI</b> (the Operations Staff via the SSAP GUI) sends requests to the SDSRV CSCI to insert SSAP information, including SSAP name, SSAP version number, PGE name, PGE version number, and SSAP Acceptance Date.
Return MCF Template	The <b>AITTL</b> and <b>PRONG CSCIs</b> receive the MCF template to populate, from the SDSRV CSCI, as part of the GetMCF service call.
Return SSAP Information	The SDSRV CSCI sends lists of SSAPs and related information to the <b>AITTL CSCI</b> .
Return DAPs	The SDSRV CSCI places the DAPs on a local AITTL CSCI disk.
Return Product	The data granules requested by the <b>PRONG</b> and <b>AITTL CSCIs</b> are sent from the SDSRV CSCI.

**Table 4.1-3. SDSRV CSCI Interface Events (4 of 6)**

Event	Interface Event Description
Search Inventory	The <b>PLANG CSCI</b> sends requests to the SDSRV CSCI to search the SDPS Inventory (archives).
Submit User Acquire	The <b>PLANG CSCI</b> submits an acquire command to the SDSRV CSCI on behalf of the user. The user gets a response via the DDIST CSCI upon data distribution.
Return Inventory Granule Metadata	The <b>PLANG CSCI</b> receives the inventory granule metadata identifying the scene within the granule based on an inventory search request sent to the DSS.
Return Granule URs	The <b>PLANG CSCI</b> receives Earth Science Data Type (ESDT) Universal References (URs) for the granules from the SDSRV CSCI.
Return PGE Tar File	After an unsuccessful execution of a PGE, the <b>PRONG CSCI</b> obtains the Tar file containing the PGE log files, core dump (if any), PCF and other files, and requests the files be inserted into the SDSRV CSCI for permanent archive.
Request Communications Support (RCS)	<p>The <b>DCCI CSCI</b> provides a library of services available to each SDPS and CSMS CSCI/CSC. The CSCI services required to perform specific assignments are requested from the DCCI CSCI. These services include:</p> <ul style="list-style-type: none"> <li>• CCS Middleware Support</li> <li>• Database Connection Services</li> <li>• Name/Address Services</li> <li>• Server Request Framework (SRF)</li> <li>• Universal Reference (UR)</li> <li>• Error/Event Logging</li> <li>• Fault Handling Services</li> <li>• Mode Information</li> <li>• Query Registry - Retrieving the requested configuration attribute-value pairs from the Configuration Registry</li> <li>• Request Distribution Media Options from the Configuration Registry</li> </ul>
Replace Events	The <b>DCCI CSCI</b> (Subscription Server) receives updated subscription events with modified qualifiers for an Earth Science Data Type (ESDT) from the SDSRV CSCI, when an ESDT is updated. This event replaces the original event in the DCCI CSCI.
Register Events	The <b>DCCI CSCI</b> (Subscription Server) receives the subscription events for an Earth Science Data Type from the SDSRV CSCI, when an ESDT is installed into the system or when an ESDT is updated by adding additional events.
Trigger Events	The <b>DCCI CSCI</b> receives notification from the SDSRV CSCI (via an event trigger) when a subscription event occurs on an Earth Science Data Type Service.
Export Location Information	The SDSRV CSCI stores physical and logical server location information in the <b>DCCI CSCI</b> .
Return URs	The <b>DCCI CSCI</b> receives Earth Science Data Type (ESDT) Universal References (URs) for the requested granules from the SDSRV CSCI.
Return Inventory Granule Metadata	The <b>DCCI CSCI</b> (MTMGW Server CSC) receives the inventory granule metadata identifying the scene within the granule from the SDSRV CSCI based on an inventory search request.

**Table 4.1-3. SDSRV CSCI Interface Events (5 of 6)**

Event	Interface Event Description
Request Data Insert	The <b>STMGT CSCI</b> receives data insert requests from the SDSRV CSCI for a particular file or files (into the SDPS inventory and archives). Inserted data is accompanied by metadata. The metadata is catalogued in the SDSRV inventory as a granule of a particular ESDT short name and version. These files can be processing output, static files received with PGEs, PGE Tape Archive (TAR) files, Algorithm Packages (APs), Science Software Archive Packages (SSAPs) or Delivered Algorithm Packages (DAPs), failed PGE tar files, or production history files.
Search Data	The <b>STMGT CSCI</b> receives search requests from the SDSRV CSCI for granules corresponding to a particular ESDT short name and version, which has a particular local granule id.
Create_Allocate	The <b>STMGT CSCI</b> receives requests from the SDSRV CSCI to allocate areas on the local staging disk to store "ingested" data or output files from routine data processing or SSIT work.
Destroy_Detach	The <b>STMGT CSCI</b> receives requests from the SDSRV CSCI to detach from a staging disk area (lose access to an existing staging disk area owned by another process).
Copy Data	The <b>STMGT CSCI</b> receives requests from the SDSRV and DDIST CSCIs to copy data within staging disks and between staging disks.
Link File	The <b>STMGT CSCI</b> receives SDSRV and DDIST CSCIs send requests to the STMGT CSCI to link files from read-only cache to a staging disk specified in the request.
Request Distribution	The <b>DDIST CSCI</b> receives distribution requests from the SDSRV CSCI for various categories of data. The distribution services on those data are essentially identical for all data categories.
Request ESDT Install	The <b>Operations Staff</b> sends ESDT installation information to the SDSRV CSCI for adding the descriptor, Dynamic Link Library (DLL), and version id for a new Earth Science Data Type.
Request ESDT Update	The <b>Operations Staff</b> sends updated ESDT information to the SDSRV CSCI for adding updated descriptor and Dynamic Link Library (DLL) information for an existing ESDT.
Request On-Demand Granule Deletion	The <b>Operations Staff</b> sends requests to the SDSRV CSCI to delete science granules from the archive and inventory or just the archive. The associated PH, QA and Browse granules can also be deleted.
Send Errors/Status	The <b>Operations Staff</b> receives error conditions and status of data distribution from the SDSRV CSCI (for acquires that are synchronous) or the DDIST CSCI (if the acquire is asynchronous and the DDIST CSCI gets the request).
Send Acquire	The <b>DCCI CSCI</b> creates an "acquire" (instruction to obtain data) and sends it to the SDSRV CSCI. This is similar to the "Request Product" interface event, except it applies to EDOS expedited data.
Get Info for EDN	The <b>DCCI CSCI</b> receives the Expedited Data Set Notification (EDN) information from the SDSRV CSCI, by request, and uses the EDN information to send messages to users at the ASTER GDS.


**Table 4.1-3. SDSRV CSCI Interface Events (6 of 6)**

Event	Interface Event Description
Send Search	The <b>DCCI CSCI</b> sends requests to the SDSRV CSCI, on behalf of the SIPS, to get qualified granule URs returned.
Send Event ID	The <b>DCCI CSCI</b> sends Event Ids to the SDSRV CSCI when ESDTs are installed or when ESDTs are updated by adding additional events.
Return Status	The <b>DCCI CSCI</b> returns status to the SDSRV CSCI to simply indicate that the request was received, not that the action succeeded.
Return Configuration Parameters	The SDSRV CSCI receives the configuration parameters and associated values from the Registry Server from the <b>DCCI CSCI</b> .
Return Dist. Media Options	The SDSRV CSCI receives the requested distribution media options from the <b>DCCI CSCI</b> .
Import Location Information	The SDSRV CSCI retrieves physical and logical server location information from the <b>DCCI CSCI</b> .
Send Electronic Distribution Request	The <b>OMSRV CSCI</b> sends requests to the SDSRV CSCI to distribute ECS data electronically via an FTP Pull or FTP Push.

#### 4.1.1.3 Science Data Server Architecture

Figure 4.1-3 is the SDSRV CSCI architecture diagrams. The diagrams show the events sent to the SDSRV CSCI processes and the events the SDSRV CSCI processes send to other processes.


The Science Data Server (SDSRV) CSCI is six processes: four SDPS custom developed processes and two COTS processes. The four SDPS custom developed processes are the Science Data Server (EcDsScienceDataServer), the Hierarchical Data Format (HDF) EOS Server (EcDsHdfEosServer) [Note: multiple HDF Server processes can be defined.], and the Science Data Server GUI (EcDsSdSrvGui), and the Granule Deletion Administration Tool (EcDsBulkDelete.pl). The COTS processes are the Sybase ASE and the Spatial Query Server (SQS). The SDSRV CSCI uses the Sybase ASE Database Management System (DBMS) for SDPS Inventory and Configuration data storage. The server holds Earth Science Data Type configuration information and the data catalog for all the archived products found at a DAAC.

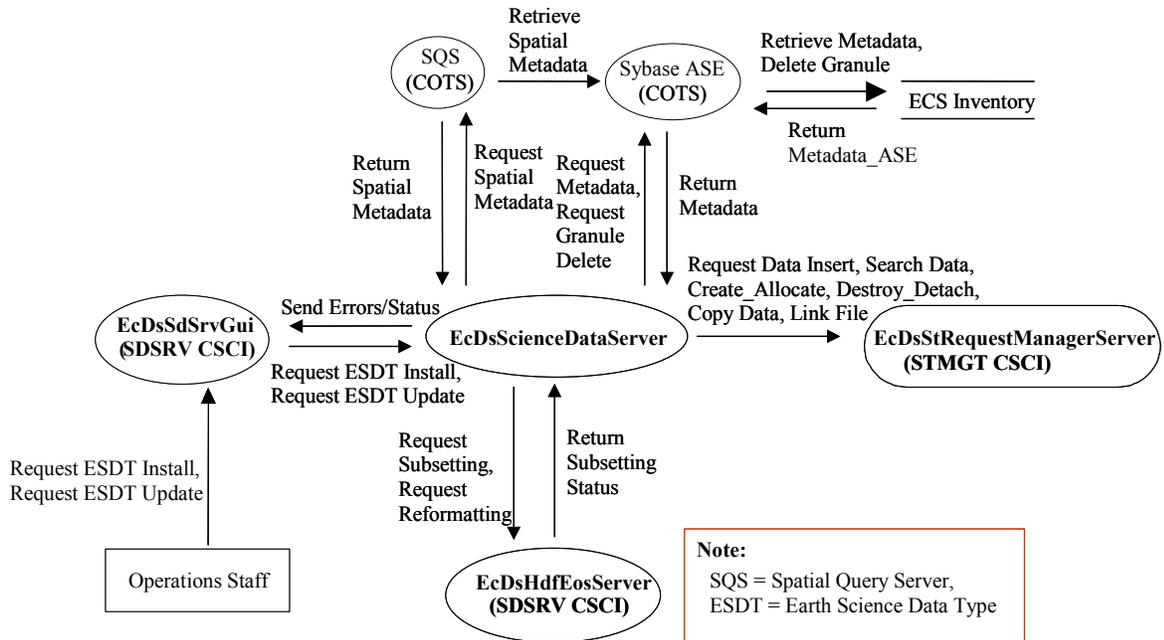


**Figure 4.1-3. SDSRV CSCI Architecture Diagram**




**Figure 4.1-3. SDSRV CSCI Architecture Diagram (cont.)**

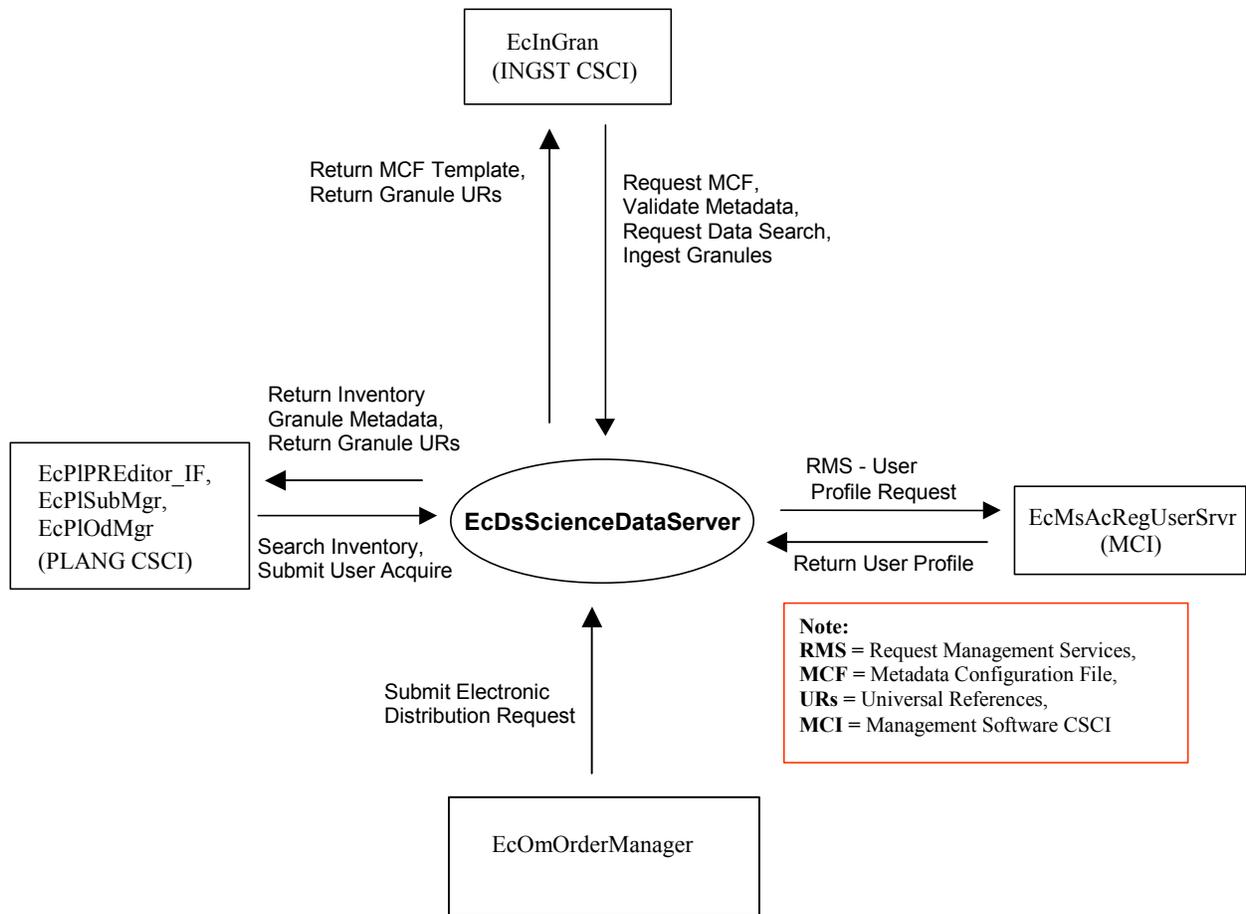

**Figure 4.1-3. SDSRV CSCI Architecture Diagram (cont.)**

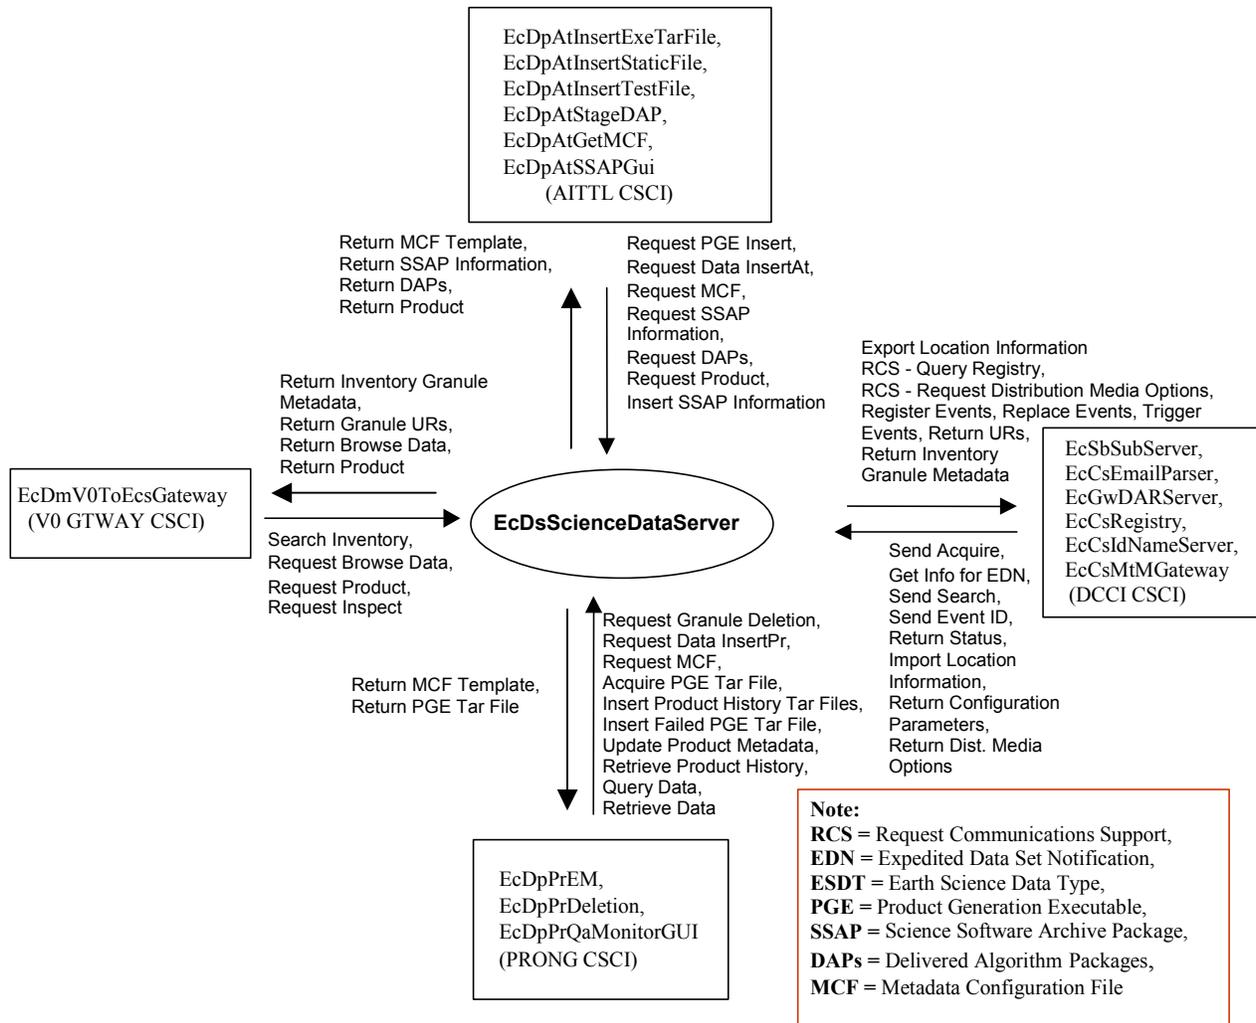

**Figure 4.1-3. SDSRV CSCI Architecture Diagram (cont.)**

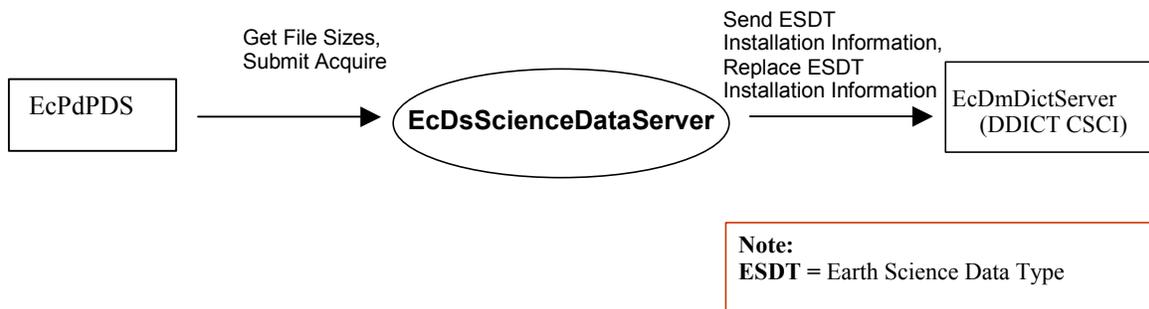

**Figure 4.1-3. SDSRV CSCI Architecture Diagram (cont.)**

#### 4.1.1.4 Science Data Server Process Descriptions

Table 4.1-4 provides descriptions of the processes shown in the SDSRV CSCI architecture diagrams.

**Table 4.1-4. SDSRV CSCI Processes (1 of 2)**

Process	Type	COTS / Developed	Functionality
EcDsScienceDataServer	Server	Developed	<p>The EcDsScienceDataServer server manages collections of earth science and related data, and service requests for the storage, search, retrieval, and manipulation of data within those collections. The science data server performs the following functions:</p> <ul style="list-style-type: none"> <li>• Manages earth science data as logical collections of related data, using interfaces independent of any data formats and hardware configurations provided by underlying storage technologies,</li> <li>• Manages interactive sessions with users,</li> <li>• Manages the processing of service requests from the DMS (VO Gateway), providing a variety of services on earth science and related data,</li> <li>• Issues requests to the STMGT and DDIST CSCIs to perform storage and distribution services in support of processing service requests,</li> <li>• Manages the processing of service requests from the INS and DPS to "insert" data for long-term storage and access,</li> <li>• Manages the processing of service requests from the DPS to provide data to be used as input for data processing,</li> <li>• Provides subscription events and event triggers to the CSS subscription server</li> <li>• Issues commands to the CSS EcSbSubServer to replace subscription events</li> <li>• Provides sub-setting requests to the EcDsHdfEosServer for scene sub-setting</li> <li>• Provides sub-setting requests to the EcDsHdfEosServer for compound sub-setting</li> <li>• Provides reformatting request to the EcDsHdfEosServer for conversion from HDFEOS to HDF</li> </ul> <p>The EcDsScienceDataServer supports:</p> <ul style="list-style-type: none"> <li>• Single requests, one at a time</li> <li>• Multiple concurrent requests</li> <li>• Asynchronous request processing</li> <li>• Request processing buffered from SOCKET Communication Call threads</li> <li>• Multiple threads within a single user session</li> </ul>

**Table 4.1-4. SDSRV CSCI Processes (2 of 2)**

Process	Type	COTS / Developed	Functionality
EcDsHdfEosServer	Server	Developed	<p>The EcDsHdfEosServer provides science data sub-setting capabilities for earth science data configured with a sub-setting service.</p> <p>EcDsHdfEosServer supports:</p> <ul style="list-style-type: none"> <li>• Single requests, one at a time</li> <li>• Asynchronous request processing</li> <li>• Request processing buffered from SOCKET Communication Call threads</li> <li>• Sub-setting requests of spatial (floating scene or fixed scene)/band/temporal sub-setting</li> <li>• Reformatting requests from HDFEOS to HDF</li> </ul>
EcDsSdSrvGui	GUI	Developed	<p>The EcDsSdSrvGui provides an operator interface for:</p> <ul style="list-style-type: none"> <li>• Receiving descriptor files and dynamic link libraries (dll) for configuring ESDTs into the EcDsScienceDataServer</li> <li>• Monitoring active EcDsScienceDataServer requests</li> <li>• Updating ESDT information in the EcDsScienceDataServer</li> </ul> <p>The EcDsSdSrvGui supports:</p> <ul style="list-style-type: none"> <li>• Single requests, one at a time</li> </ul>
EcDsBulkDelete.pl	Command Line Utility	Developed	<p>The EcDsBulkDelete.pl provides a command line operator interface for:</p> <ul style="list-style-type: none"> <li>• Deleting granules in the EcDsScienceDataServer and the EcDsStArchiveServer</li> <li>• Deleting granules in the EcDsScienceDataServer</li> </ul>
Sybase ASE	Server	COTS	<p>Provides the management of spatial data types of an earth science catalog of metadata for the SDPS. Includes capabilities for searching and storing the catalog.</p>
Spatial Query Server (SQS)	Server	COTS	<p>Provides the capability to manage spatial data types of earth science catalog metadata for the SDPS (including specialized spatial searches).</p>

#### 4.1.1.5 Science Data Server Process Interface Descriptions

Table 4.1-5 provides descriptions of the interface events shown in the SDSRV CSCI architecture diagram for Figure 4.1-3.

**Table 4.1-5. SDSRV CSCI Process Interface Events (1 of 22)**

<b>Event</b>	<b>Event Frequency</b>	<b>Interface</b>	<b>Initiated By</b>	<b>Event Description</b>
Request Metadata	One per request to store, search, delete, update, Earth Science Metadata	<i>Process:</i> Sybase ASE (COTS)	<i>Processes:</i> EcDsScienceDataServer <i>Library:</i> DsDb <i>Class:</i> DsDbInterface via the Sybase ASE, SQS, and Sybase Open Client COTS	The <b>Sybase ASE</b> receives requests from the EcDsScienceDataServer to store, search, delete, or update Earth Science Metadata. The results are sent back to the EcDsScienceDataServer. The M&O Staff must manually change a configured parameter in order for the EcDsScienceDataServer to communicate directly with the Sybase ASE.
Request Granule Delete	One granule per request	<i>Process:</i> Sybase ASE (COTS)	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsDb <i>Class:</i> DsDbInterface	The <b>Sybase ASE</b> receives requests to delete granules from the EcDsScienceDataServer.
Retrieve Metadata	One to many per metadata request	Data Tables within the ECS Inventory	<i>Process:</i> Sybase ASE <i>Libraries (Sybase):</i> Libtcl.so Libtli.so Libsybdb.so <i>Class:</i> Sybase Open Client /ct_lib	The <b>Sybase ASE</b> retrieves metadata from the ECS Inventory database and returns the metadata to the SQS or the EcDsScienceDataServer.
Delete Granule	One per request	Data Tables within the ECS Inventory	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsDb <i>Class:</i> DsDbInterface	The <b>Sybase ASE</b> requests granules to be deleted from the ECS Inventory data tables.
Return Metadata_ASE	One to many per metadata request	<i>Process:</i> Sybase ASE (COTS)	Data Tables within the ECS Inventory	The <b>ECS Inventory data tables</b> provide the metadata or spatial metadata to the Sybase ASE.

**Table 4.1-5. SDSRV CSCI Process Interface Events (2 of 22)**

Event	Event Frequency	Interface	Initiated By	Event Description
Return Metadata	Per request	<i>Process:</i> Sybase ASE (COTS)	<i>Process:</i> EcDsScienceDataServer <i>Libraries:</i> DpPrDssIF, DsDb <i>Class:</i> DsDbInterface	Metadata results are sent back to the EcDsScienceDataServer via the SQS. The results include the status of the Sybase ASE commands.
Request Data Insert	One per data insert request from EcDpPrEM or EclnGran	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Classes:</i> DsCIRequest, DsCICommand, DsGeESDT	The <b>EcDsStRequestManager Server</b> receives data insert requests from the EcDsScienceDataServer for data to be stored in the SDPS inventory.
Search Data	One granule per search request	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Class:</i> DsCIQuery	The <b>EcDsStRequestManager Server</b> receives search requests from the EcDsScienceDataServer for a granule corresponding to a particular ESDT short name and version, which has a particular local granule id.
Create_Allocate	One allocation per request	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsGe <i>Class:</i> DsGeESDT	The <b>EcDsStRequestManager Server</b> receives requests from the EcDsScienceDataServer to allocate areas on the local staging disk to store data for distribution.
Destroy_Detach	One detach per request	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsGe <i>Class:</i> DsGeESDT	The <b>EcDsStRequestManager Server</b> receives requests from the EcDsScienceDataServer to detach from (lose access) to an existing staging disk area owned by another process.

**Table 4.1-5. SDSRV CSCI Process Interface Events (3 of 22)**

<b>Event</b>	<b>Event Frequency</b>	<b>Interface</b>	<b>Initiated By</b>	<b>Event Description</b>
Copy Data	One file copy per request	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsGe <i>Class:</i> DsGeESDT	The <b>EcDsStRequestManager Server</b> receives requests from the EcDsScienceDataServer to copy data within staging disks and between staging disks.
Link File	One link per file in a request	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsGe <i>Class:</i> DsGeESDT	The <b>EcDsStRequestManager Server</b> receives requests from the EcDsScienceDataServer to link files from the read-only cache to a staging disk and from one staging disk to another.
Return Subsetting status	One per sub-setting request	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCsSh <i>Classes:</i> DsCsConformant DsCsNonConformant	<i>Process:</i> EcDsHdfEosServer <i>Classes:</i> DsESDTLsL70R DsESDTLsL70RWRS	The <b>EcDsHdfEosServer</b> sends the status of sub-setting requests to the EcDsScienceDataServer.
Request Subsetting	One per request to reduce resolution	<i>Process:</i> EcDsHdfEosServer <i>Library:</i> DsCsSh <i>Classes:</i> DsCsConformant DsCsNonConformant	<i>Process:</i> EcDsScienceDataServer <i>Classes:</i> DsESDTLsL70R DsESDTLsL70RWRS	The <b>EcDsHdfEosServer</b> receives requests from the EcDsScienceDataServer to reduce the resolution of an archived earth science data product using configured services for spatial (floating scene or fixed scene) / band/temporal reduction.
Request Reformatting	One per request to reformat the data	<i>Process:</i> EcDsHdfEosServer <i>Libraries:</i> DsDc, DsCsSh <i>Class:</i> DsCsNonConformantImp	<i>Process:</i> EcDsScienceDataServer <i>Classes:</i> DsESDTLsL70R DsESDTLsL70RWRS	The <b>EcDsHdfEosServer</b> receives requests from the EcDsScienceDataServer to convert HDFEOS format to HDF format.

**Table 4.1-5. SDSRV CSCI Process Interface Events (4 of 22)**

<b>Event</b>	<b>Event Frequency</b>	<b>Interface</b>	<b>Initiated By</b>	<b>Event Description</b>
Request ESDT Install	One per new ESDT installation	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsAd <i>Class:</i> DsAdDataTypeCollector	Operations Staff <i>Process:</i> EcDsSdSrvGui <i>Class:</i> DsGuSdDatatype	The <b>Operations Staff</b> sends ESDT installation information for adding the descriptor, dynamic link library (dll), and version ID for a new ESDT to the EcDsScienceDataServer, via the EcDsSdSrvGui.
Request ESDT Update	One per new ESDT update	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsAd <i>Class:</i> DsAdDataTypeCollector	Operations Staff <i>Process:</i> EcDsSdSrvGui <i>Class:</i> DsGuSdDatatype	The <b>Operations Staff</b> sends updated ESDT information, via the EcDsSdSrvGui, to the EcDsScienceDataServer, for adding updated descriptor and dynamic link library (dll) information for an existing ESDT.
Send Errors/Status	Once per distribution request completion	Operations Staff <i>Process:</i> EcDsSdSrvGui <i>Class:</i> DsGuErrorDialog	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> EcUt <i>Class:</i> EcLgErrorMsg	The <b>Operations Staff</b> receives, via the <b>EcDsSdSrvGui</b> , error conditions and status of ESDT installs and updates from the EcDsScienceDataServer (for acquires that are synchronous).
Return Spatial Metadata	Per request	<i>Process:</i> EcDsScienceDataServer <i>Libraries:</i> DpPrDssIF, DsDb <i>Class:</i> DsDbInterface	<i>Process:</i> SQS (COTS)	Metadata results are sent back to the EcDsScienceDataServer via the SQS. The results include the status of the Sybase ASE and SQS Server commands. The SQS handles the translation of spatial metadata data types (understood by the EcDsScienceDataServer and SQS) to relational data types (understood by SQS and the Sybase ASE) and vice versa.

**Table 4.1-5. SDSRV CSCI Process Interface Events (5 of 22)**

<b>Event</b>	<b>Event Frequency</b>	<b>Interface</b>	<b>Initiated By</b>	<b>Event Description</b>
Retrieve Spatial Metadata	One per request	<i>Process:</i> Spatial Query Server (SQS) [COTS]	<i>Processes:</i> EcDsScienceDataServer <i>Library:</i> DsDb <i>Class:</i> DsDbInterface via the Sybase ASE, SQS, and Sybase Open Client COTS	The <b>SQS</b> sends requests to the Sybase ASE to store, search, delete, or update Earth Science Metadata. The results are sent back to the SQS. The default configuration is for the EcDsScienceDataServer to communicate via the SQS to the ECS inventory.
Request Spatial Metadata	One per request to store, search, delete, or update spatial Earth Science Metadata.	<i>Process:</i> SQS (COTS)	<i>Process:</i> EcDsScienceDataServer <i>Libraries:</i> DpPrDssIF, DsDb <i>Class:</i> DsDbInterface	The <b>SQS</b> receives requests from the EcDsScienceDataServer to store, search, delete, or update spatial Earth Science Metadata in the ECS inventory database.
Request Distribution	One per distribution request	<i>Process:</i> EcDsDistributionServer <i>Library:</i> DsDdC <i>Class:</i> DsDdRequestMgrC	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsSr <i>Class:</i> DsSrWorkingCollection	The <b>EcDsDistributionServer</b> receives distribution requests from the EcDsScienceDataServer for various categories of data. The distribution services are essentially identical for all data categories.
Request On-Demand Granule Deletion	Per Operations Staff request	<i>Process:</i> Sybase ASE (COTS)	Operations Staff <i>Process:</i> EcDsBulkDelete.pl	The <b>Operations Staff</b> sends requests, via the <b>Granule Delete Tool</b> , to the Sybase ASE database server to delete science granules from the archive and inventory or just the archive. The associated PH, QA and Browse granules can also be deleted. A physical delete or a Delete From Archive can be performed.

**Table 4.1-5. SDSRV CSCI Process Interface Events (6 of 22)**

<b>Event</b>	<b>Event Frequency</b>	<b>Interface</b>	<b>Initiated By</b>	<b>Event Description</b>
Delete Granule	One per request	<i>Script:</i> EcDsBulkDelete.pl	<i>Process:</i> Sybase ASE (COTS)	The Sybase ASE database server deletes the requested granule from the archive and inventory or just the archive.
Request MCF	One per set of external data received by ECS	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Class:</i> DsCIDescriptor	<i>Process:</i> EcInGran <i>Library:</i> InPreprocess <i>Class:</i> InDataPreprocessTask	The <b>EcInGran</b> process requests the Metadata Configuration File (MCF) from the EcDsScienceDataServer, prior to a data insert request. The EcDsScienceDataServer provides the MCF information as part of the GetMCF service call.
Validate metadata	One per data insert request.	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Class:</i> DsCIDescriptor	<i>Process:</i> EcInGran <i>Library:</i> InPreprocess <i>Class:</i> InDataPreprocessTask	The <b>EcInGran</b> process populates the metadata files and sends requests to the EcDsScienceDataServer to validate the metadata files.
Request Data Search	One per input pointer in metadata or per granule pointer in linkage file	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Class:</i> DsCIQuery	<i>Process:</i> EcInGran <i>Library:</i> InPreprocess <i>Class:</i> InDataPreprocessTask	The <b>EcInGran</b> process sends a search request to the EcDsScienceDataServer for a granule corresponding to particular ESDT short name and version, which has a particular local granule id.

**Table 4.1-5. SDSRV CSCI Process Interface Events (7 of 22)**

<b>Event</b>	<b>Event Frequency</b>	<b>Interface</b>	<b>Initiated By</b>	<b>Event Description</b>
Ingest Granules	One per data insert request from EclnGran	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Classes:</i> DsCIRequest, DsCICommand, DsGeESDT	<i>Process:</i> EclnGran <i>Library:</i> InPreprocess <i>Class:</i> InDataServerInsertionTask	The <b>EclnGran</b> process sends requests to the EcDsScienceDataServer to insert a particular file or files into the archive. Inserted data is accompanied by metadata. The metadata is catalogued in the SDSRV inventory as a granule of a particular ESDT short name and version. This data can be algorithms, Level 0 (LO) data, standard products, ancillary data, correlative data or calibration data.
Request Management Services (RMS)	One service per request	N/A	N/A	The <b>EcMsAcRegUserSrvr</b> provides a basic management library of services to the processes, implemented as client or server applications, using the DCCI CSCI process Framework. The basic management library of services includes: (See the table cells below.)
RMS (cont.)	At system startup or shutdown and for restarts	<i>Process:</i> EcMsAcRegUserSrvr	DAAC unique startup scripts	<b>System startup and shutdown</b> - Please refer to the release-related, current version of the Mission Operations Procedures for the ECS Project document (611) and the current ECS Project Training Material document (625), identified in Section 2.2.1 of this document.
RMS (cont.)	One profile per request	<i>Process:</i> EcMsAcRegUserSrvr <i>Library:</i> MsAcCInt <i>Class:</i> MsAcUsrProfile	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsSr <i>Class:</i> DsSrManagedServer	<b>User Profile Request</b> - The EcMsAcRegUserSrvr receives requests from the EcDsScienceDataServer for user profile information such as e-mail address and shipping address from authorized users to support their processing activities.

**Table 4.1-5. SDSRV CSCI Process Interface Events (8 of 22)**

<b>Event</b>	<b>Event Frequency</b>	<b>Interface</b>	<b>Initiated By</b>	<b>Event Description</b>
Return User Profile	One per request	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsSr <i>Class:</i> DsSrManagedServer	<i>Process:</i> EcMsAcRegUserSrvr <i>Library:</i> MsAcCInt <i>Classes:</i> MsAcUsrProfile, RWPportal	The <b>EcMsAcRegUserSrvr</b> returns the user profile to the EcDsScienceDataServer.
Submit Electronic Distribution Request	One order per user	<i>Process:</i> EcDsScienceDataServer	<i>Process:</i> EcOmOrderManager <i>Executable:</i> EcOmSrCLI <i>Library:</i> DsClientSideLibs <i>Class:</i> OmSdsrvlf	The <b>EcOmOrderManager</b> sends requests to the EcDsScienceDataServer to distribute ECS data electronically via an FTP Pull or FTP Push.

**Table 4.1-5. SDSRV CSCI Process Interface Events (9 of 22)**

Event	Event Frequency	Interface	Initiated By	Event Description
Search Inventory	One per query	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Class:</i> DsCIQuery	<i>Processes:</i> EcPIPREditor_IF, EcPISubMgr, EcPIOdMgr <i>Library:</i> DpPrDssIF <i>Class:</i> DpPrDSSInterface	The <b>EcPIPREditor_IF</b> , <b>EcPISubMgr</b> and <b>EcPIOdMgr</b> processes create two types of queries. One type only has the ESDT short name and data start and stop times and the other type also includes spatial coordinates. The EcPIPREditor_IF process queries when the predicted data is available. The EcPIPREditor_IF process creates an ESDT Reference from an UR after receiving an ESDT Reference from a query. The EcPISubMgr process creates an ESDT Reference from an UR after receiving a subscription notification or receiving an ESDT reference from a query. The EcPISubMgr process queries when predicted data is not available. The EcPIOdMgr process creates an ESDT Reference from an UR after receiving a subscription notification or receiving an ESDT reference from a query. The EcPIOdMgr process queries when predicted data is not available.

**Table 4.1-5. SDSRV CSCI Process Interface Events (10 of 22)**

<b>Event</b>	<b>Event Frequency</b>	<b>Interface</b>	<b>Initiated By</b>	<b>Event Description</b>
Submit User Acquire	One per request	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Classes:</i> DsCI Request, DsCICommand, DsCIESDTReferenceCollector	<i>Process:</i> EcPIOdMgr <i>Library:</i> PICore2 <i>Classes:</i> PIPrActivator, DpPrDSSInterface	The <b>EcPIOdMgr</b> submits an acquire command to the EcDsScienceDataServer on behalf of the user. The user gets a response via the EcDsDistributionServer upon data distribution.
Return Inventory Granule Metadata	One set of metadata per granule	<i>Processes:</i> EcPIPREditor_IF, EcPISubMgr, EcPIOdMgr <i>Library:</i> DpPrDssIF <i>Class:</i> DpPrDSSInterface	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Class:</i> DsCIQuery	The EcDsScienceDataServer returns metadata information about the granule(s) being inspected to the <b>EcPIPREditor_IF</b> , <b>EcPISubMgr</b> and <b>EcPIOdMgr</b> processes.
Return Granule URs	One per input pointer in metadata or per granule pointer in linkage file	<i>Processes:</i> EcPIPREditor_IF, EcPISubMgr, EcPIOdMgr <i>Library:</i> DpPrDssIF <i>Class:</i> DpPrDSSInterface  <i>Process:</i> EcInGran <i>Library:</i> InPreprocess <i>Class:</i> InDataPreprocessTask	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Class:</i> DsCIQuery	The EcDsScienceDataServer returns ESDT References for granules to satisfy the query to the <b>EcPIPREditor_IF</b> , <b>EcPISubMgr</b> and <b>EcPIOdMgr</b> processes.  The EcDsScienceDataServer returns the granule URs for the granules requested in the data search to the <b>EcInGran</b> process.
Return MCF Template	One per set of external data received by ECS	<i>Process:</i> EcInGran <i>Library:</i> InPreprocess <i>Class:</i> InDataPreprocessTask	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Class:</i> DsCIDescriptor	The EcDsScienceDataServer provides the MCF information as part of the GetMCF service call to the <b>EcInGran</b> process.

**Table 4.1-5. SDSRV CSCI Process Interface Events (11 of 22)**

<b>Event</b>	<b>Event Frequency</b>	<b>Interface</b>	<b>Initiated By</b>	<b>Event Description</b>
Request PGE Insert	One per insert request	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Classes:</i> DsCIRequest, DsCICommand	<i>Processes:</i> EcDpAtInsertExeTarFile, EcDpAtInsertStaticFile, EcDpAtInsertTestFile <i>Library:</i> PICore2 <i>Classes:</i> DpAtDsrv, PIResourceRequirement	The <b>EcDpAtInsertExeTarFile</b> , <b>EcDpAtInsertStaticFile</b> , and <b>EcDpAtInsertTestFile</b> send PGE insert requests to the EcDsScienceDataServer for data that defines a PGE and allows it to be scheduled and executed.
Request Data InsertAt	One per data insert request	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Classes:</i> DsCIRequest, DsCICommand, DsGeESDT	<i>Processes:</i> EcDpAtInsertExeTarFile, EcDpAtInsertStaticFile, EcDpAtInsertTestFile <i>Library:</i> DpAtDsrv <i>Class:</i> DpAtDsrv	The <b>EcDpAtInsertExeTarFile</b> , <b>EcDpAtInsertStaticFile</b> , and <b>EcDpAtInsertTestFile</b> , processes send requests to the EcDsScienceDataServer to insert a particular file or files into the archive. Inserted data is accompanied by metadata. The metadata is catalogued in the SDSRV inventory as a granule of a particular ESDT short name and version. For the EcDpAtInsertExeTarFile, EcDpAtInsertStaticFile, and EcDpAtInsertTestFile processes these files can be processing output, static files received with PGEs, PGE Tape Archive (TAR) files, Algorithm Packages (APs), Science Software Archive Packages (SSAPs), or Delivered Algorithm Packages (DAPs), failed PGE tar files, or production history files.
Request MCF	One per set of external data received by the ECS	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Class:</i> DsCIDescriptor	<i>Processes:</i> EcDpPrEM, EcDpAtGetMCF <i>Library:</i> DpPrDssIF <i>Class:</i> DpPrDSSInterface	The <b>EcDpAtGetMCF</b> and <b>EcDpPrEM</b> processes request the Metadata Configuration File (MCF) from the EcDsScienceDataServer, prior to a data insert request.

**Table 4.1-5. SDSRV CSCI Process Interface Events (12 of 22)**

<b>Event</b>	<b>Event Frequency</b>	<b>Interface</b>	<b>Initiated By</b>	<b>Event Description</b>
Request SSAP Information	One per SSAP information request	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Classes:</i> DsCIESDTReferenceCollector, DsCIRequest, DsCICommand	<i>Process:</i> EcDpAtSSAPGui <i>Libraries:</i> DpAtSSAP, DpAtDsrv <i>Classes:</i> DpAtSSAPManager, DpAtDsrv	The <b>EcDpAtSSAPGui</b> sends requests to the EcDsScienceDataServer for information about SSAPs, including names of existing SSAPs and the components associated with a specific SSAP.
Request DAPs	One per DAPs request	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Classes:</i> DsCIESDTReferenceCollector, DsCIRequest, DsCICommand	<i>Process:</i> EcDpAtStageDAP <i>Library:</i> DpAtDsrv <i>Class:</i> DpAtDsrv	The <b>EcDpAtStageDAP</b> requests DAPs from the SDSRV Archives based on the UR. In response, the DAPs are returned and stored on the local AITTL disk.
Request Product	One per product order request	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Classes:</i> DsCIRequest, DsCICommand	<i>Process:</i> EcDpAtStageDAP <i>Library:</i> DpAtDsrv <i>Class:</i> DpAtDsrv	The <b>EcDpAtStageDAP</b> sends requests to the EcDsScienceDataServer for particular data granules to be pushed, via the FTP service, onto the DPS science processor as input for data processing or for SSIT work.
Insert SSAP Information	One per SSAP	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Classes:</i> DsCIRequest, DsCICommand	Operations Staff <i>Process:</i> EcDpAtSSAPGui <i>Library:</i> DpAtDsrv <i>Classes:</i> DpAtSSAPManager, DpAtDsrv	The Operations Staff uses the <b>EcDpAtSSAPGui</b> to send requests to the EcDsScienceDataServer to insert new SSAP information or update some existing SSAP information.

**Table 4.1-5. SDSRV CSCI Process Interface Events (13 of 22)**

Event	Event Frequency	Interface	Initiated By	Event Description
Export Location Information	One per server	<i>Process:</i> EcCsIdNameServer <i>Libraries:</i> EcPf, Middleware, FoNs, Folp, oodce <i>Classes:</i> EcPfManagedServer, CCSMdwNameServer, FoNsNameServerProxy, CCSMdwRwNetProxy	<i>Process:</i> EcDsScienceDataServer	The EcDsScienceDataServer places physical and logical location information in the <b>EcCsIdNameServer</b> .

**Table 4.1-5. SDSRV CSCI Process Interface Events (14 of 22)**

Event	Event Frequency	Interface	Initiated By	Event Description
Request Communications Support	One service per request	<p><b>Process:</b> EcCsIdNameServer</p> <p><b>Libraries:</b> EcPf, Middleware, FoNs, Folp, oodce</p> <p><b>Classes:</b> EcPfManagedServer, CCSMdwNameServer, FoNsNameServerProxy, CCSMdwRwNetProxy</p> <p><b>Library (Common):</b> EcUr</p> <p><b>Class:</b> EcUrServerUR</p> <p><b>Library:</b> event</p> <p><b>Class:</b> EcLgErrorMsg</p> <p><b>Process:</b> EcSbSubServer</p> <p><b>Library:</b> EcSbCl</p> <p><b>Classes:</b> EcClEvent, EcClTriggerEventCb, EcClRegisterEventCb</p> <p><b>Process:</b> EcCsEmailParser</p> <p><b>Class:</b> EcCsEmailParser</p> <p><b>Process:</b> EcCsRegistry</p> <p><b>Library:</b> EcCsRegistry</p> <p><b>Class:</b> EcRgRegistryServer_C</p>	<p><b>Process:</b> EcDsScienceDataServer</p> <p><b>Libraries:</b> DsDe1, DsBtSh</p> <p><b>Classes:</b> DsDeEventCustomizer, DsDeServiceCustomizer, DsBtSbSbrvNotifier</p>	<p>The DCCI CSCI provides a library of services available to each SDPS and CSMS CSCI. The CSCI services required to perform specific assignments are requested from the DCCI CSCI. These services include:</p> <ul style="list-style-type: none"> <li>• CCS Middleware Support</li> <li>• Database Connection Services</li> <li>• Name/Address Services</li> <li>• Server Request Framework (SRF)</li> <li>• Universal Reference (UR)</li> <li>• Error/Event Logging</li> <li>• Fault Handling Services</li> <li>• Mode Information</li> <li>• Query Registry - Retrieving the requested configuration attribute-value pairs from the Configuration Registry</li> <li>• Request Distribution Media Options from the Configuration Registry (when it first accesses an Earth Science Data Type.)</li> </ul>

**Table 4.1-5. SDSRV CSCI Process Interface Events (15 of 22)**

<b>Event</b>	<b>Event Frequency</b>	<b>Interface</b>	<b>Initiated By</b>	<b>Event Description</b>
Register Events	One per ESDT installation	<i>Process:</i> EcSbSubServer <i>Library:</i> EcSbSrSh <i>Class:</i> EcSbEvent	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsDe1 <i>Class:</i> DsDeEventCustomizer	The EcDsScienceDataServer sends the subscription events for an Earth Science Data Type to the <b>EcSbSubServer</b> when an ESDT is installed into the system or when an ESDT is updated by adding additional subscription events.
Replace Events	One per ESDT update	<i>Process:</i> EcSbSubServer <i>Library:</i> EcSbSrSh <i>Class:</i> EcCIEvent	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsDe1 <i>Class:</i> DsDeEventCustomizer	The EcDsScienceDataServer sends the updated subscription events for an Earth Science Data Type (ESDT) to the <b>EcSbSubServer</b> when an ESDT is updated in the system. This replaces the previous information.
Trigger Events	One per subscription event	<i>Process:</i> EcSbSubServer <i>Library:</i> EcSbCI <i>Class:</i> EcCIEvent	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsBtSh <i>Class:</i> DsBtSbsrvNotifier	The EcDsScienceDataServer notifies the <b>EcSbSubServer</b> (via an event trigger) when a subscription event occurs on an Earth Science Data Type Service.
Return URs	One per query	<i>Process:</i> EcCsMtMGateway <i>Classes:</i> EcCsMtMDataServerMgr, EcCsMtMECSOrderProxy, , EcCsMtMOrderImp, EcCsMtMECSSearchOrderProxy, EcCsMtMSearchOrderImp	<i>Process:</i> EcDsScienceDataServer <i>Libraries:</i> DsCI, DsSh <i>Classes:</i> DsCIRequest, DsCICommand, DsCIESDTReferenceCollector	The EcDsScienceDataServer returns a list of granule URs as a result of a query from the <b>EcCsMtMGateway</b> .

**Table 4.1-5. SDSRV CSCI Process Interface Events (16 of 22)**

Event	Event Frequency	Interface	Initiated By	Event Description
Return Inventory Granule Metadata	Once per granule inspect	<i>Process:</i> EcCsMtMGateway <i>Class:</i> EcCsMtMECSearchProxy, EcCsMtMSearchImp, EcCsMtMSdsrvMgr, EcCsMtMDataServerMgr	<i>Process:</i> EcDsScienceDataServer <i>Libraries:</i> DsCl, DsSh <i>Classes:</i> DsCIESDTReference, DsCIESDTReferenceCollector	The EcDsScienceDataServer returns granule metadata information as results of receiving a granule inspect request from the <b>EcCsMtMGateway</b> .
Send Acquire	One per acquire	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCl <i>Classes:</i> DsClRequest DsClCommand DsCIESDTReferenceCollector	<b>Process:</b> EcCsEmailParser <i>Class:</i> EcCsEmailParser <b>Process:</b> EcSbSubServer <i>Library:</i> EcSbSr <i>Class:</i> EcSbSubscription	An “acquire” (instruction to obtain data) is created by the <b>EcCsEmailParser</b> or the <b>EcSbSubServer</b> and sent to the EcDsScienceDataServer. This is similar to the “Request Product” interface event, except it applies to EDOS expedited data.
Get Info for EDN	One per request	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCl <i>Class:</i> DsCIESDTReference	<i>Process:</i> EcCsEmailParser <i>Class:</i> EcCsEmailParser	The <b>EcCsEmailParser</b> sends requests to the EcDsScienceDataServer for the Expedited Data Set Notification (EDN) information and sends messages to users at the ASTER GDS.
Send Search	Per client request	<i>Processes:</i> EcDsScienceDataServer <i>Library:</i> DsCl <i>Class:</i> DsCIESDTReferenceCollector	<i>Process:</i> EcCsMtMGateway <i>Library:</i> DsXSsStaticClientLibs (macro) <i>Classes:</i> See note at the end of this table.	The <b>EcCsMtMGateway</b> sends inventory search requests, constructed from the qualifying metadata information in the SIPS request, to the EcDsScienceDataServer via a remote procedure call.
Send Event ID	One per event	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsDe1 <i>Class:</i> DsDeEventCustomizer	<i>Process:</i> EcSbSubServer <i>Library:</i> EcSbSrSh <i>Class:</i> EcSbEvent	The <b>EcSbSubServer</b> sends Event IDs to the EcDsScienceDataServer when ESDTs are installed or when ESDTs are updated by adding additional events.

**Table 4.1-5. SDSRV CSCI Process Interface Events (17 of 22)**

<b>Event</b>	<b>Event Frequency</b>	<b>Interface</b>	<b>Initiated By</b>	<b>Event Description</b>
Return Status	One per request	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsBtSh <i>Class:</i> DsBtSbsrvNotifier	<i>Process:</i> EcSbSubServer <i>Library:</i> EcUt	Status returned by the <b>EcSbSubServer</b> to the EcDsScienceDataServer to simply indicate that the request was received, not that the action succeeded.
Import Location Information	One per server	<i>Process:</i> EcDsScienceDataServer	<i>Process:</i> EcCsIdNameServer <i>Libraries:</i> EcPf, Middleware, FoNs, Folp, oodce <i>Classes:</i> EcPfManagedServer, CCSMdwNameServer, FoNsNameServerProxy, CCSMdwRwNetProxy	The EcDsScienceDataServer retrieves server location information from the <b>EcCsIdNameServer</b> .
Return Configuration Parameters	One set per request	<i>Process:</i> EcDsScienceDataServer	<i>Process:</i> EcCsRegistry <i>Library:</i> EcCsRegistry <i>Class:</i> EcRgRegistryServer_C	The <b>EcCsRegistry</b> returns the attribute-value pairs (configuration parameters) to the EcDsScienceDataServer upon request.
Return Dist. Media Options	One set of media types per request	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsDe1 <i>Class:</i> DsDeServiceCustomizer	<i>Process:</i> EcCsRegistry <i>Library:</i> EcCsRegistry <i>Class:</i> EcRgRegistryServer_C	The <b>EcCsRegistry</b> returns the attribute-value pairs (configuration parameters) to the EcDsScienceDataServer upon request.
Request Granule Deletion	One per granule delete request	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Classes:</i> DsCIRequest DsCICommand DsCIESDTRreferenceCollector	<i>Process:</i> EcDpPrDeletion <i>Library:</i> DpPrDssIF <i>Class:</i> DpPrDSSInterface	The <b>EcDpPrDeletion</b> sends delete requests to the EcDsScienceDataServer for particular granules (interim data) in the SDSRV archives.

**Table 4.1-5. SDSRV CSCI Process Interface Events (18 of 22)**

<b>Event</b>	<b>Event Frequency</b>	<b>Interface</b>	<b>Initiated By</b>	<b>Event Description</b>
Request Data InsertPr	One per data insert request	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Classes:</i> DsCIRequest, DsCICommand, DsGeESDT	<i>Processes:</i> EcDpPrEM, EcDpPrQaMonitorGUI <i>Libraries:</i> DpPrDsslF, DpPrQaMonitor <i>Classes:</i> DpPrDSSInterface, DpPrQAGranuleQaFlags	The <b>EcDpPrEM</b> and <b>EcDpPrQaMonitorGUI</b> processes send requests to the EcDsScienceDataServer to insert a particular file or files into the archive. Inserted data is accompanied by metadata. The metadata is catalogued in the SDSRV inventory as a granule of a particular ESDT short name and version. For the EcDpPrEM process, these files can be granules or PGE tar files. For the EcDpPrQaMonitorGUI, these files are metadata updates.
Acquire PGE Tar File	One per request	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Classes:</i> DsCIRequest, DsCICommand	<i>Process:</i> EcDpPrEM <i>Library:</i> DpPrDsslF <i>Class:</i> DpPrDSSInterface	The <b>EcDpPrEM</b> process acquires a tar file for any PGE not currently local to the science processor from the EcDsScienceDataServer. The executable is extracted from the tar file and used during PGE execution.
Insert Product History Tar Files	One per successful PGE execution	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Classes:</i> DsCIRequest, DsCICommand	<i>Process:</i> EcDpPrEM <i>Library:</i> DpPrDsslF <i>Class:</i> DpPrDSSInterface	After the PGE has successfully completed executing and archiving the resulting outputs, the <b>EcDpPrEM</b> requests the PGE Production History Tar file be inserted into the EcDsScienceDataServer for permanent archive.
Insert Failed PGE Tar File	One per unsuccessful PGE execution	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Classes:</i> DsCIRequest, DsCICommand	<i>Process:</i> EcDpPrEM <i>Library:</i> DpPrDsslF <i>Class:</i> DpPrDSSInterface	After an unsuccessful execution of a PGE, the <b>EcDpPrEM</b> obtains the Tar file containing the PGE log files, core dump (if any), PCF and other files, and requests the files be inserted into the EcDsScienceDataServer for permanent archive.

**Table 4.1-5. SDSRV CSCI Process Interface Events (19 of 22)**

<b>Event</b>	<b>Event Frequency</b>	<b>Interface</b>	<b>Initiated By</b>	<b>Event Description</b>
Update Product Metadata	One per metadata product update	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Classes:</i> DsCICommand, DsCIRequest, DsCIESDTReferenceCollector	<i>Process:</i> EcDpPrQaMonitorGUI <i>Library:</i> DpPrQaMonitor <i>Class:</i> DpPrQAGranuleQaFlags	The <b>EcDpPrQaMonitorGUI</b> provides the operator with capabilities to update product metadata in the EcDsScienceDataServer.
Retrieve Product History	One per request	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Class:</i> DsCIAcquireCommand	<i>Process:</i> EcDpPrQaMonitorGUI <i>Library:</i> DpPrQaMonitor <i>Class:</i> DpPrQaMonitor	The <b>EcDpPrQaMonitorGUI</b> submits requests of this type to the EcDsScienceDataServer. It transfers the Production History tar file from the Science Data archive to the user's host machine.
Query Data	One per query	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Class:</i> DsCIESDTReferenceCollector	Operations Staff <i>Process:</i> EcDpPrQaMonitorGUI <i>Library:</i> DpPrQaMonitor <i>Class:</i> DpPrQaDataGranule	The Operations Staff uses the <b>EcDpPrQaMonitorGUI</b> to submit requests of this type to the EcDsScienceDataServer. It searches the archive for granules that match the user-supplied selection criteria: data type and begin/end date. Results are displayed to the user at the EcDpPrQaMonitorGUI.
Retrieve Data	One per request	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Classes:</i> DsCIQuery, DsCIAcquireCommand	Operations Staff <i>Process:</i> EcDpPrQaMonitorGUI <i>Library:</i> DpPrQaMonitor <i>Class:</i> DpPrQaMonitor	The Operations Staff uses the <b>EcDpPrQaMonitorGUI</b> to send retrieval requests, to the EcDsScienceDataServer, for a particular data granuleId. The product is transferred (pushed), via the FTP service, onto the DPS science processor and used as input for PGE processing or for SSIT work.

**Table 4.1-5. SDSRV CSCI Process Interface Events (20 of 22)**

Event	Event Frequency	Interface	Initiated By	Event Description
Return MCF Template	One per set of external data received by ECS	<i>Processes:</i> EcDpPrEM, EcDpAtGetMCF <i>Library:</i> DpPrDssIF <i>Class:</i> DpPrDSSInterface	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Class:</i> DsCIDescriptor	The EcDsScienceDataServer provides the MCF template as part of the GetMCF service call to the <b>EcDpPrEM</b> and <b>EcDpAtGetMCF</b> processes.
Return PGE Tar File	One per request	<i>Process:</i> EcDpPrEM <i>Library:</i> DpPrDssIF <i>Class:</i> DpPrDSSInterface	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Classes:</i> DsCIRequest, DsCICommand	After an unsuccessful execution of a PGE, the <b>EcDpPrEM</b> obtains the Tar file containing the PGE log files, core dump (if any), Process Control File (PCF) and other files, and requests the files be inserted into the DSS for permanent archive.
Search Inventory	One per service request	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Classes:</i> DsCIQuery, DsCIESDTReferenceCollector	<i>Process:</i> EcDmV0ToEcsGateway <i>Library:</i> RequestProcessing <i>Class:</i> DmGwInventoryRequest	The <b>EcDmV0ToEcsGateway</b> sends requests to the EcDsScienceDataServer to search the SDPS Inventory (archives).
Request Browse Data	One per browse request	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Classes:</i> DsCIESDTReferenceCollector, DsCIRequest, DsCICommand	<i>Process:</i> EcDmV0ToEcsGateway <i>Library:</i> RequestProcessing <i>Class:</i> DmGwBrowseRequest	The <b>EcDmV0ToEcsGateway</b> submits requests for browse data to the EcDsScienceDataServer to acquire reduced resolution products to support a product request.
Request Product	One per product order request	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Classes:</i> DsCIRequest, DsCICommand	<i>Process:</i> EcDmV0ToEcsGateway <i>Library:</i> RequestProcessing <i>Class:</i> DmGwAcquireRequest	The <b>EcDmV0ToEcsGateway</b> forwards product requests to the EcDsScienceDataServer from an external user to be distributed by the EcDsDistributionServer upon receipt of the data from the EcDsStStagingDiskServer.

**Table 4.1-5. SDSRV CSCI Process Interface Events (21 of 22)**

Event	Event Frequency	Interface	Initiated By	Event Description
Request Inspect	One per price estimate request	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Classes:</i> DsCIESDTReferenceCollector, DsCIRequest	<i>Process:</i> EcDmV0ToEcsGateway <i>Library:</i> RequestProcessing <i>Class:</i> DmGwPriceEstimateRequest	The <b>EcDmV0ToEcsGateway</b> sends a request for an inspection of granule metadata to the EcDsScienceDataServer in support of a price estimate request.
Return Inventory Granule Metadata	One per service request	<i>Process:</i> EcDmV0ToEcsGateway <i>Library:</i> RequestProcessing <i>Class:</i> DmGwInventoryRequest	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Classes:</i> DsCIQuery, DsCIESDTReferenceCollector	The EcDsScienceDataServer returns ESDT Universal References (URs) for the requested granules to the <b>EcDmV0ToEcsGateway</b> .
Return Granule URs	One per price estimate request	<i>Process:</i> EcDmV0ToEcsGateway <i>Library:</i> RequestProcessing <i>Class:</i> DmGwPriceEstimateRequest	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Classes:</i> DsCIESDTReferenceCollector, DsCIRequest	The EcDsScienceDataServer returns the URs for the granules to the <b>EcDmV0ToEcsGateway</b> to inspect the metadata in support of a price estimate request.
Return Browse Data	One per browse request	<i>Process:</i> EcDmV0ToEcsGateway <i>Library:</i> RequestProcessing <i>Class:</i> DmGwBrowseRequest	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Classes:</i> DsCIESDTReferenceCollector, DsCIRequest, DsCICommand	The EcDsScienceDataServer returns browse data to the <b>EcDmV0ToEcsGateway</b> to acquire reduced resolution products to support a product request.
Return Product	One per product order request	<i>Process:</i> EcDmV0ToEcsGateway <i>Library:</i> RequestProcessing <i>Class:</i> DmGwAcquireRequest	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Classes:</i> DsCIRequest, DsCICommand	The EcDsScienceDataServer returns products to the <b>EcDmV0ToEcsGateway</b> to forward to an external user via the EcDsDistributionServer upon receipt of the data from the EcDsStStagingDiskServer.

**Table 4.1-5. SDSRV CSCI Process Interface Events (22 of 22)**

Event	Event Frequency	Interface	Initiated By	Event Description
Return SSAP Information	One per SSAP information request	<i>Process:</i> EcDpAtSSAPGui <i>Libraries:</i> DpAtSSAP, DpAtDsrv <i>Classes:</i> DpAtSSAPManager, DpAtDsrv	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Classes:</i> DsCIESDTReferenceCollector, DsCIRequest, DsCICommand	The EcDsScienceDataServer returns information about SSAPs, including names of existing SSAPs and the components associated with a specific SSAP to the <b>EcDpAtSSAPGui</b> .
Return DAPs	One DAP per request	<i>Process:</i> EcDpAtStageDAP <i>Library:</i> DpAtDsrv <i>Class:</i> DpAtDsrv	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Classes:</i> DsCIESDTReferenceCollector, DsCIRequest, DsCICommand	The EcDsScienceDataServer returns DAPs from the SDPS archives to the <b>EcDpAtStageDAP</b> , which stores the DAPs on the local AITTL disk.
Send ESDT Installation Information	One per new ESDT installation	<i>Process:</i> EcDmDictServer <i>Library:</i> EcDmDdClient <i>Class:</i> DmDdCISchemaRequest	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsDe1 <i>Class:</i> DsDeDataDictController	The EcDsScienceDataServer sends ESDT installation information, to the <b>EcDmDictServer</b> , whenever a new ESDT is installed. This data consists of Inventory and Collection level metadata.
Replace ESDT Installation Information	One per ESDT update	<i>Process:</i> EcDmDictServer <i>Library:</i> EcDmDdClient <i>Class:</i> DmDdCISchemaRequest	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsDe1 <i>Class:</i> DsDeDataDictController	The EcDsScienceDataServer sends updated ESDT information to the <b>EcDmDictServer</b> whenever an ESDT is updated. This data consists of updated Inventory and Collection level metadata.
Get File Sizes				The <b>EcPdPDS</b> sends a request to the EcDsScienceDataServer to get file sizes.
Submit Acquire				The <b>EcPdPDS</b> submits an acquire request to the EcDsScienceDataServer to retrieve data granules of interest.

**Note: DsXSsStaticClientLibs is a macro defined in the COMMON components. It defines DSS library includes for the CI, Sh, Ge, Sr, De2 and GI libraries. The important classes used from this macro (by library include) are:**

- **CI** – DsCICommand, DsCIDescriptor, DsCIESDTAddRequest, DsCIESDTReference, DsCIESDTReferenceCollector, DsCIESDTReferenceVector, DsCIInsertCommand, DsCIQuery and DsCIRequest
- **Sh** – DsShByteBuffer, DsShConnectionProxy, DsSh DescriptorProxy, DsShESDTUR, DsShError, DsShErrorDetails, DsShMutex, DsShMutexLock, DsShRequest, DsShRequestProxy and DsShThread
- **GI** – GIParameterList, GIParameter, GILongP, GIGPolygonP, GIDoubleP, GIBinaryP, GIRectangleP, GIStringP and GITimeP

#### 4.1.1.6 Science Data Server Data Stores

Table 4.1-6 provides a description of the data stores for the SDSRV CSCI, and the conceptual model of the data store. The physical model for the SDSRV data stores can be found in the Science Data Server Database Design and Schema Specifications for the ECS Project (CDRL 311, 311-CD-624).

**Table 4.1-6. SDSRV CSCI Data Stores**

Data Store	Type	Description
ECS Inventory	Database	<p>The ECS Inventory (archives) contains the metadata describing the earth science data for the Earth Science Data Types at a specific DAAC. The metadata describes:</p> <ul style="list-style-type: none"> <li>• Collection level information</li> <li>• Browse data</li> <li>• Science data (as granules)</li> <li>• Quality Assessments</li> <li>• Algorithm Packages</li> <li>• Delivered Algorithm Packages</li> <li>• Production History</li> </ul> <p>The ECS catalog also contains systems data for the dynamic configuration of the EcDsScienceDataServer.</p> <p>The ECS catalog also contains implementation of the “ECS Data Model” for Attribute Validates checking.</p> <p>The ECS catalog also contains system data for ESDT Configuration.</p>

## **4.1.2 Data Distribution Software Description**

### **4.1.2.1 Data Distribution Functional Overview**

The Data Distribution (DDIST) CSCI monitors and controls processing for distribution requests. Data Distribution processing consists of directing the STMGT CSCI to place data for distribution in working storage, creating packing lists, directing the STMGT CSCI to "FtpPush" or "FtpPull", and sending notifications for completed distribution requests. Product Distribution System (PDS) subsystem requests are handled as FtpPush requests onto a PDS working directory, from which the PDS reads the data and copies the data onto hard media (e.g., 8MM tape). All requests for distribution via physical or hard media are PDS requests. The DDIST CSCI alone or through the use of the STMGT CSCI does not place data on hard media. For FtpPush requests, the STMGT FTP Server (when requested by the Distribution Server) pushes data to a user-specified location. For FtpPull requests, data is placed in a directory to be pulled. Once the data is ready, the DDIST CSCI sends an electronic message to the user providing the required information for the user to pull the data. The DDIST CSCI has a GUI interface with the administration/operations staff (Admin. /Ops). The GUI provides error conditions and status to operations staff and enables the operations staff to set parameters and control operations including suspending, canceling, and resuming requests, changing the priorities of requests, performing multiple selects, and setting threshold sizes. The DDIST CSCI provides limited automatic error response by suspending requests when most errors are encountered.


The DDIST CSCI has an interface with the following:

- STMGT CSCI
- SDSRV CSCI
- Administrator/Operations staff (through a GUI or command line)
- MSS (MCI)


The Administrator/Operations staff and the SDSRV CSCI control the DDIST CSCI activities. The DDIST CSCI receives direction to perform its functions from calls to the STMGT CSCI.

### **4.1.2.2 Data Distribution Context**

Figure 4.1-4 is the DDIST CSCI context diagrams. The diagrams show the events sent to the DDIST CSCI and the events the DDIST CSCI sends to other CSCIs and Users. Table 4.1-7 provides descriptions of the events (by service name) shown in the DDIST CSCI context diagrams.

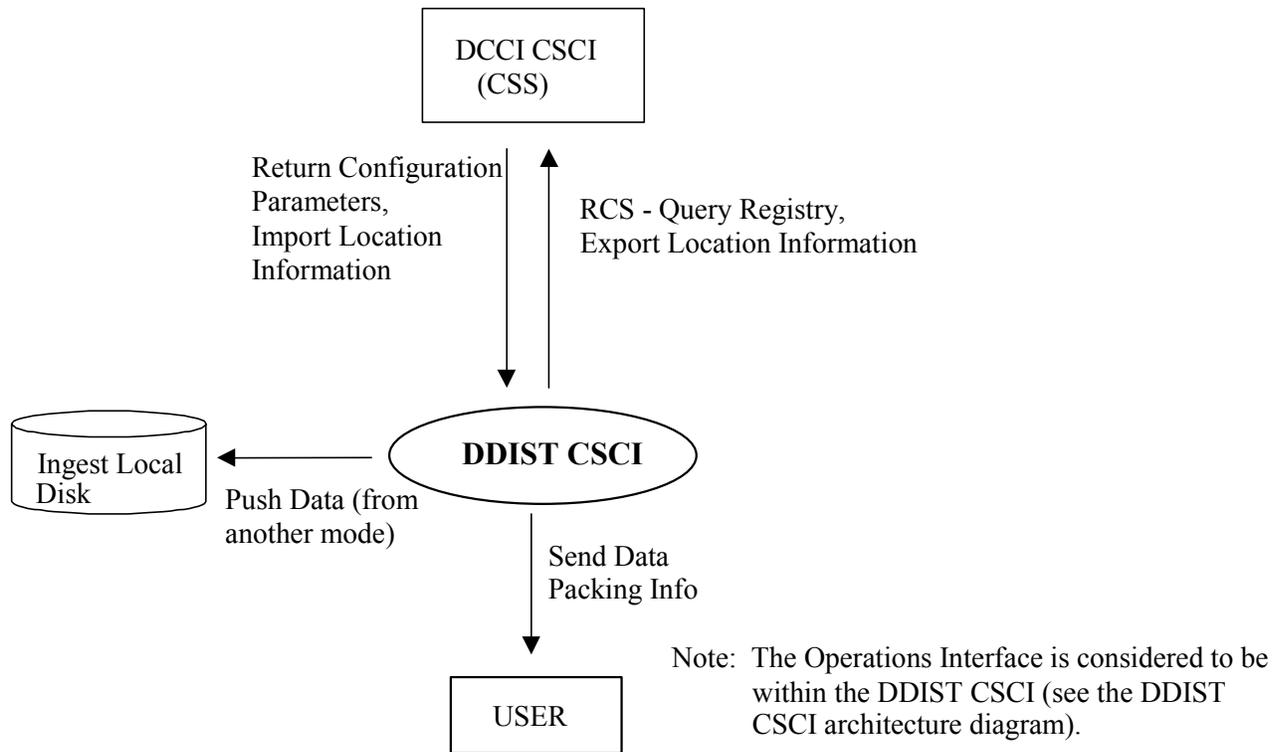

**Figure 4.1-4. DDIST CSCI Context Diagram**

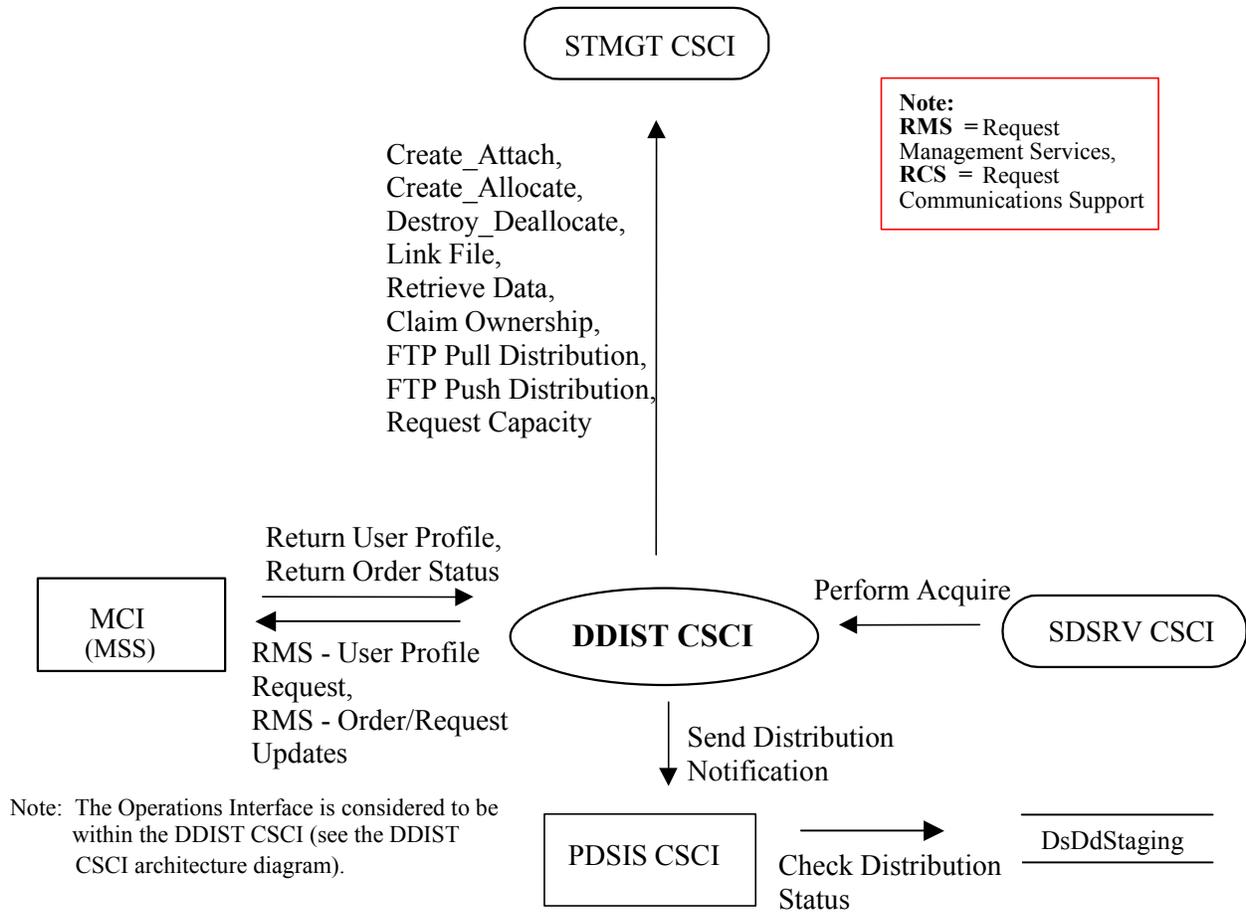

**Figure 4.1-4. DDIST CSCI Context Diagram (cont.)**

**Table 4.1-7. DDIST CSCI Interface Events (1 of 2)**

Event	Interface Event Description
Request Communications Support	<p>The <b>DCCI CSCI</b> provides a library of services available to each SDPS and CSMS CSCI. The CSCI services required to perform specific assignments are requested from the DCCI CSCI. These services include:</p> <ul style="list-style-type: none"> <li>• CCS Middleware Support</li> <li>• Database Connection Services</li> <li>• Name/Address Services</li> <li>• Server Request Framework (SRF)</li> <li>• Error/Event Logging</li> <li>• Fault Handling Services</li> <li>• Mode Information</li> <li>• Query Registry - Retrieving the requested configuration attribute-value pairs from the Configuration Registry</li> </ul>
Export Location Information	The DDIST CSCI stores physical and logical server location information in the <b>DCCI CSCI</b> .
Send Data Packing Info	Notification sent to the <b>user</b> via E-mail about a data product to be or has been distributed. Data handled electronically is either pushed, via the File Transfer Protocol (FTP) service, to a user-specified location or placed in a directory to be pulled via the FTP service by the user.
Push Data (from another mode)	The DDIST CSCI pushes data, via the FTP service, to the <b>Ingest local disk</b> when it is distributing data to be ingested.
Return Configuration Parameters	The DDIST CSCI receives the configuration parameters and associated values from the Registry Server within the <b>DCCI CSCI</b> .
Import Location Information	The DDIST CSCI retrieves physical and logical server location information from the <b>DCCI CSCI</b> .
Create_Attach	The DDIST CSCI sends requests to the <b>STMGT CSCI</b> to attach (gain access to an existing staging disk area allocated by another process) to a staging disk area.
Create_Allocate	The DDIST CSCI sends requests to the <b>STMGT CSCI</b> to allocate areas on the local staging disk to store data for distribution.
Destroy_Deallocate	The DDIST CSCI sends requests to the <b>STMGT CSCI</b> to deallocate (lose access to) an existing staging disk area.
Link File	The DDIST CSCI sends requests to the <b>STMGT CSCI</b> to link files from read-only cache to a staging disk specified in the request.
Retrieve Data	The DDIST CSCI sends requests to the <b>STMGT CSCI</b> to retrieve data from the SDPS archives to be staged for distribution.
Claim Ownership	The DDIST CSCI sends requests to the <b>STMGT CSCI</b> to claim ownership of (take responsibility for deallocating) an existing staging disk area.
FTP Pull Distribution	The DDIST CSCI sends requests to the <b>STMGT CSCI</b> to move a file to the Pull area.
FTP Push Distribution	The DDIST CSCI sends requests to the <b>STMGT CSCI</b> to distribute a file directly to a user or to a predetermined local disk area for the user.
Request Capacity	The DDIST CSCI sends requests to the <b>STMGT CSCI</b> to get the effective maximum capacity of a media type. This information is used to determine the number of media needed to satisfy a given request.

**Table 4.1-7. DDIST CSCI Interface Events (2 of 2)**


Event	Interface Event Description
Perform Acquire	A request is sent from the <b>SDSRV CSCI</b> to the DDIST CSCI for science data or a product to be sent to a specified user. The <b>SDSRV CSCI</b> assembles instructions to send data and sends the instructions to the DDIST CSCI. The DDIST CSCI stores the request received from the <b>SDSRV CSCI</b> in a queue with the appropriate priority. The DDIST CSCI sends a request to the STMGT CSCI to push the data, via the FTP service. When the request is taken from the queue, the STMGT CSCI is passed the data retrieval request from the DDIST CSCI for a particular data granule to be pushed onto the DPS science processor, via the FTP service. The data granule is to be used as input for PGE processing or for SSIT work.
Send Distribution Notification	The DDIST CSCI sends a distribution notification, via e-mail, to the <b>PDSIS CSCI</b> when data is being distributed on hard media.
Check Distribution Status	The <b>PDSIS CSCI</b> checks the data base table for the status of the distribution request (i.e., in the queue, being processed, or distribution completed).
Request Management Services	<p>The <b>MCI</b> provides a basic management library of services to the CSCIs, implemented as client or server applications, using the CSS Process Framework. The basic management library of services includes:</p> <ul style="list-style-type: none"> <li>• <b>System startup and shutdown</b> - Please refer to the release-related, current version of the Mission Operations Procedures for the ECS Project document (611) and the current ECS Project Training Material document (625), identified in Section 2.2.1 of this document.</li> </ul> <p>The MCI also interfaces with other CSCIs or CSCs to perform the following:</p> <ul style="list-style-type: none"> <li>• <b>User Profile Request</b> – The MCI provides requesting CSCIs or CSCs with access to user profile information such as e-mail address and shipping address to support their processing activities.</li> <li>• <b>Order/Request Updates</b> - The DDIST CSCI interfaces with the Accountability Management Service Order/Request Tracking to create/update the EcAcRequest (user product order request) such as media id, quantity and type.</li> </ul>
Return User Profile	The DDIST CSCI receives user profile information from the <b>MCI</b> to authenticate a user.
Return Order Status	The DDIST CSCI receives order status (i.e., Order ID, Request ID) information from the <b>MCI</b> .

#### 4.1.2.3 Data Distribution Architecture


The DDIST CSCI is a couple of SDPS developed processes with the addition of the Sybase ASE COTS hardware and software process package as a data repository identified as:

- EcDsDistributionServer - Data Distribution
- EcDsDdistGui - Data Distribution GUI
- Sybase ASE - Data Repository (storage area)

Figure 4.1-5 is the DDIST CSCI architecture diagrams. The diagrams show the events sent to the DDIST CSCI processes and the events the DDIST CSCI processes send to other processes and the Operations staff.

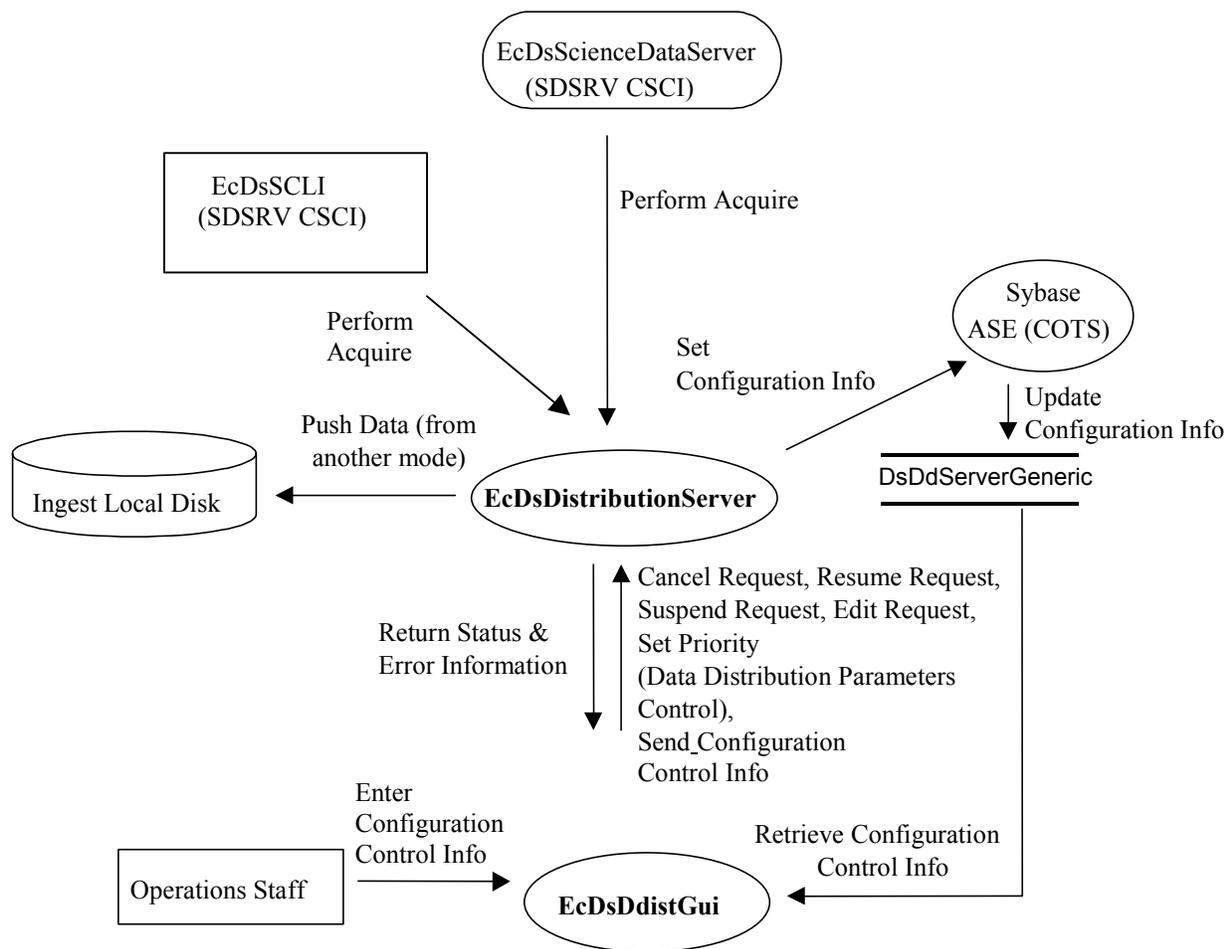

**Figure 4.1-5. DDIST CSCI Architecture Diagram**

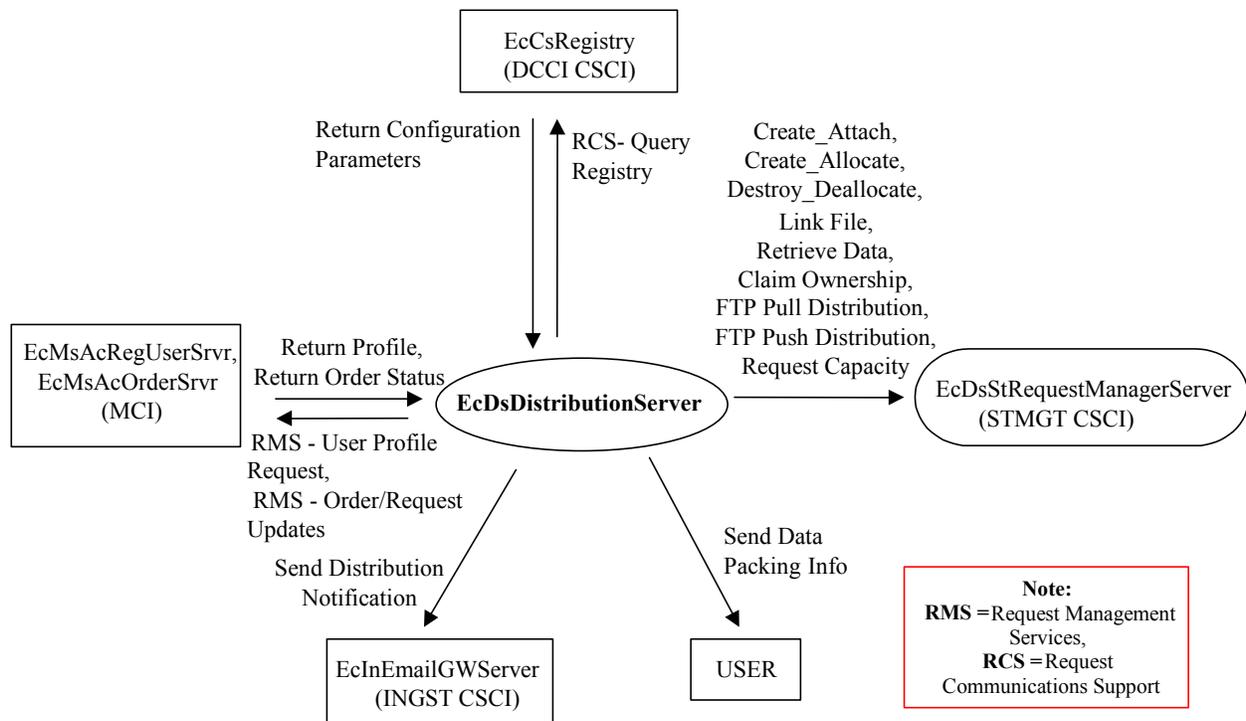

**Figure 4.1-5. DDIST CSCI Architecture Diagram (cont.)**

#### 4.1.2.4 Data Distribution Process Descriptions

Table 4.1-8 provides descriptions of the processes shown in the DDIST CSCI architecture diagram.

**Table 4.1-8. DDIST CSCI Processes**

Process	Type	COTS/ Developed	Functionality
EcDsDistribution Server	Server	Developed	This process provides the control and coordination for data distribution through request processing.
EcDsDdistGui	GUI	Developed	This process enables operations to initiate, track, and manipulate distribution requests by using input GUI controls and database information.
Sybase ASE	Server	COTS	The process contains the request list and has a set of stored procedures, which updates the request configuration, provides the request configuration to GUI operations and checkpoints the state of the CSCI for fault recovery purposes.

#### 4.1.2.5 Data Distribution Process Interface Descriptions

Table 4.1-9 provides descriptions of the interface events shown in the DDIST CSCI architecture diagrams.

**Table 4.1-9. DDIST CSCI Process Interface Events (1 of 8)**

Event	Event Frequency	Interface	Initiated By	Event Description
Perform Acquire	One granule and file per request	<i>Process:</i> EcDsDistributionServer <i>Libraries:</i> DsDdSSH, DsDdB, DsDdC, DsDdI <i>Classes:</i> DsDdScheduler, DsDdRequestMgrReal, DsDdDCERequestMgrConcrete, DsDdRequestMgrC, DsDdGranuleC, DsDdGranuleS	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsSr <i>Classes:</i> DsDbInterface, DsDdRequestMgrReal, DsSrWorkingCollection	The <b>EcDsScienceDataServer</b> sends requests to the EcDsDistributionServer for science data (granule(s)) or a product to be sent to a specified user. The <b>EcDsScienceDataServer</b> assembles instructions to send data to the EcDsDistributionServer. The EcDsDistributionServer sends a request to the EcDsStStagingDiskServer to push the data, via the FTP service, followed by a signal file to the destination specified in an acquire instruction by particular ESDTs that function this way. The <b>EcDsScienceDataServer</b> sends requests to the EcDsDistributionServer to retrieve subsetted data files for distribution.
Set Configuration Info	One per scheduling request	Sybase ASE (COTS)	<i>Process:</i> EcDsDistributionServer <i>Libraries:</i> DsDdSSH, DsDdC <i>Classes:</i> DsDdRequestMgrBaseC, DsDdConfiguration, DsDdDistRequestS	Current configuration information entered by the Operations staff via the EcDsDdistGui is sent to the <b>Sybase ASE</b> database via the EcDsDistributionServer. The Operations staff can access the configuration information from the database for expedient data distribution or product order distribution scheduling.

**Table 4.1-9. DDIST CSCI Process Interface Events (2 of 8)**

Event	Event Frequency	Interface	Initiated By	Event Description
Update Configuration Info	One set per request	DDIST Data Stores	<i>Process:</i> Sybase ASE (COTS)	The <b>Sybase ASE</b> updates the configuration data in the data stores as requested.
Retrieve Configuration Control Info	Upon Operations Staff request	DDIST Data Stores	<i>Process:</i> EcDsDdistGui <i>Classes:</i> DsDdConfiguration, DsDdPfConfigFile	The Operations Staff retrieve configuration control information from the database for viewing or update via the <b>EcDsDdistGui</b> .
Cancel Request	One per priority cancel request	<i>Process:</i> EcDsDistributionServer <i>Library:</i> DsDdC <i>Class:</i> DsDdRequestMgrBaseC	Operations Staff <i>Process:</i> EcDsDdistGui <i>Class:</i> DsGuiDistRequest	The Operations Staff uses the <b>EcDsDdistGui</b> to send a command to the EcDsDistributionServer to cancel the priority of a request.
Resume Request	One per resume request	<i>Process:</i> EcDsDistributionServer <i>Libraries:</i> DsDdB, DsDdC, DsDdl <i>Class:</i> DsDdRequestMgrC	Operations Staff <i>Process:</i> EcDsDdistGui <i>Class:</i> DsGuiDistRequest	The Operations Staff uses the <b>EcDsDdistGui</b> to send a command to the EcDsDistributionServer to resume requests when resume requests are suspended with errors.
Suspend Request	One per suspend request	<i>Process:</i> EcDsDistributionServer <i>Libraries:</i> DsDdB, DsDdC, DsDdl <i>Class:</i> DsDdRequestMgrC	Operations staff <i>Process:</i> EcDsDdistGui <i>Class:</i> DsGuiDistRequest	The <b>Operations staff</b> uses the EcDsDdistGui to send a command to the EcDsDistributionServer to suspend a request(s).
Edit Request	Per operator request on any given suspended request	<i>Process:</i> EcDsDistributionServer <i>Library:</i> DsDdSSh <i>Classes:</i> DsDdScheduler, DsDdRequestMgrReal, DsDdDCERequestMgrConcrete	Operations Staff <i>Process:</i> EcDsDdistGui <i>Class:</i> DsGuiDistRequest	The <b>Operations staff</b> uses the EcDsDdistGui to send requests to the EcDsDistributionServer to edit a suspended request to the selected media type.

**Table 4.1-9. DDIST CSCI Process Interface Events (3 of 8)**

<b>Event</b>	<b>Event Frequency</b>	<b>Interface</b>	<b>Initiated By</b>	<b>Event Description</b>
Set Priority	One per priority change	<i>Process:</i> EcDsDistributionServer <i>Library:</i> DsDdS <i>Classes:</i> DsDdMedia, DsDdRequestListS, DsDdRequestMgrReal, DsDdDistRequestS	Operations staff <i>Process:</i> EcDsDdistGui <i>Class:</i> DsGuiDistRequest	The <b>Operations staff</b> uses the EcDsDdistGui to send a command to the EcDsDistributionServer to change the priority of a distribution request.
Send Configuration Control Info	One per request	<i>Process:</i> EcDsDistributionServer <i>Library:</i> DsDdSSh <i>Classes:</i> DsDdDistListS, DsDdDistFileS, DsDdDistRequestS	<i>Process:</i> EcDsDdistGui <i>Classes:</i> DsDdConfiguration DsDdPfConfigFile	The configuration control information captured by the EcDsDdistGui is sent to the EcDsDistributionServer to be stored in the DDIST data stores.
Enter Configuration Control Info	One per configuration sent	<i>Process:</i> EcDsDdistGui <i>Classes:</i> DsDdConfiguration DsDdPfConfigFile	Operations staff	The <b>Operations staff</b> enters configuration control information (queues, thresholds, suspend and resume status) via the EcDsDdistGui or command line.
Return Status & Error Information	One per Distribution Request	<i>Process:</i> EcDsDdistGui <i>Class:</i> DsGuErrorDialog	<i>Process:</i> EcDsDistributionServer <i>Classes:</i> DsDdMedia, DsDdBaseQueue	The EcDsDistributionServer sends Distribution Request status and error information to the Operations staff via the <b>EcDsDdistGui</b> , if the acquire is asynchronous and the EcDsDistributionServer gets the request.
Push Data (from another mode)	One distribution per request	Ingest Local Disk	<i>Process:</i> EcDsDistributionServer <i>Class:</i> DsDdGranuleS	The EcDsDistributionServer pushes data, via the FTP Service, to the <b>Ingest Local Disk</b> when it is distributing data to be ingested.

**Table 4.1-9. DDIST CSCI Process Interface Events (4 of 8)**

Event	Event Frequency	Interface	Initiated By	Event Description
Request Communications Support	One service per request	<p><b>Process:</b> EcCsIdNameServer</p> <p><b>Libraries:</b> EcPf, Middleware, FoNs, Folp, oodce</p> <p><b>Classes:</b> EcPfManagedServer, EcPfClient, CCSMdwNameServer, FoNsNameServerProxy, CCSMdwRwNetProxy</p> <p><b>Library (Common):</b> EcUr <b>Class:</b> EcUrServerUR</p> <p><b>Library:</b> event <b>Class:</b> EcLgErrorMsg</p> <p><b>Process:</b> EcCsRegistry <b>Library:</b> EcCsRegistry <b>Class:</b> EcRgRegistryServer_C</p>	<p><b>Processes:</b> EcDsDistributionServer</p> <p><b>Classes:</b> DsDdRequestMgrServer, DsDdlog</p>	<p>The <b>DCCI CSCI</b> provides a library of services available to each SDPS and CSMS CSCI. The CSCI services required to perform specific assignments are requested from the DCCI CSCI. These services include:</p> <ul style="list-style-type: none"> <li>• CCS Middleware Support</li> <li>• Database Connection Services</li> <li>• Name/Address Services</li> <li>• Server Request Framework (SRF)</li> <li>• Error/Event Logging</li> <li>• Fault Handling Services</li> <li>• Mode Information</li> <li>• Query Registry - Retrieving the requested configuration attribute-value pairs from the Configuration Registry</li> </ul>
Create_Attach	One attach per request	<p><b>Process:</b> EcDsStRequestManagerServer</p> <p><b>Library:</b> DsStRmClient</p> <p><b>Class:</b> DsStRequestManager</p>	<p><b>Process:</b> EcDsDistributionServer</p> <p><b>Classes:</b> DsDdMedia, DsDsStaging</p>	<p>The EcDsDistributionServer sends requests to the <b>EcDsStRequestManager Server</b> to attach (gain access to an existing staging disk area allocated by another process) to a staging disk area.</p>

**Table 4.1-9. DDIST CSCI Process Interface Events (5 of 8)**

Event	Event Frequency	Interface	Initiated By	Event Description
Create_Allocate	One allocation per request	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<i>Process:</i> EcDsDistributionServer <i>Class:</i> DsDdMedia	The EcDsDistributionServer send requests to the <b>EcDsStRequestManager Server</b> to allocate areas on the local staging disk to store data for distribution.
Destroy_Deallocate	One deallocation per request	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<i>Process:</i> EcDsDistributionServer <i>Class:</i> DsDdMedia	The EcDsDistributionServer sends requests to the <b>EcDsStRequestManager Server</b> to deallocate (lose access to) an existing staging disk area.
Link File	One link per file in a request	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<i>Process:</i> EcDsDistributionServer <i>Library:</i> DsDdS <i>Class:</i> DsDdGranuleS	The EcDsDistributionServer sends requests to the <b>EcDsStRequestManager Server</b> to link files from the read-only cache to a staging disk and from one staging disk to another.
Retrieve Data	One granule per retrieval request	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<i>Process:</i> EcDsDistributionServer <i>Class:</i> DsDdGranuleS	The EcDsDistributionServer sends requests to the <b>EcDsStRequestManager Server</b> to retrieve data from the SDPS archives and to compress the retrieved data.
Claim Ownership	One per staging disk area	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<i>Process:</i> EcDsDistributionServer <i>Class:</i> DsDdMedia	The EcDsDistributionServer sends requests to the <b>EcDsStRequestManager Server</b> to claim ownership of (take responsibility for deallocating) an existing staging disk area.

**Table 4.1-9. DDIST CSCI Process Interface Events (6 of 8)**

Event	Event Frequency	Interface	Initiated By	Event Description
FTP Pull Distribution	One order per pull request	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<i>Process:</i> EcDsDistributionServer <i>Class:</i> DsDdGranuleS	The EcDsDistributionServer sends requests to the <b>EcDsStRequestManager Server</b> to move a file to the Pull area.
FTP Push Distribution	One order per push request	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<i>Process:</i> EcDsDistributionServer <i>Class:</i> DsDdGranuleS	The EcDsDistributionServer sends requests to the <b>EcDsStRequestManager Server</b> to distribute a file directly to a user via a local disk area accessible by the user.
Request Capacity	One calculation per request	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<i>Process:</i> EcDsDistributionServer <i>Class:</i> DsDdMedia	The EcDsDistributionServer determines the effective maximum capacity of a media type to send to the <b>EcDsStRequestManager Server</b> . This is used to determine the number of media needed to satisfy a given request.
Send Data Packing Info	One per distributed data location	User	<i>Process:</i> EcDsDistributionServer <i>Library:</i> DsDdSSH <i>Class:</i> DsDdMedia	The EcDsDistributionServer sends notifications to the <b>user</b> via e-mail with the location of data to be distributed or has been distributed.
Send Distribution Notification	One per distribution	<i>Process:</i> EcInEmailGWServer <i>Classes:</i> InEmailGWServer, InEmailParser	<i>Process:</i> EcDsDistributionServer <i>Library:</i> DsDdSSH <i>Classes:</i> DsDdMedia, DsDdMediaDist	The EcDsDistributionServer sends distribution notifications, via e-mail, to the <b>EcInEmailGWServer</b> .

**Table 4.1-9. DDIST CSCI Process Interface Events (7 of 8)**

<b>Event</b>	<b>Event Frequency</b>	<b>Interface</b>	<b>Initiated By</b>	<b>Event Description</b>
Request Management Services (RMS)	At system startup or shutdown and for restarts	<i>Process:</i> EcDsDistributionServer	DAAC unique startup scripts	<b>System startup and shutdown</b> - Please refer to the release-related, current version of the Mission Operations Procedures for the ECS Project document (611) and the current ECS Project Training Material document (625), identified in Section 2.2.1 of this document.
RMS (cont.)	One per address request	<i>Process:</i> EcMsAcRegUserSvr <i>Libraries:</i> MsAcCInt, MsAcComm	<i>Process:</i> EcDsDistributionServer <i>Library:</i> DsDdSSh <i>Class:</i> DsDdMedia	The <b>MCI</b> also interfaces with other CSCIs or CSCs to perform the following: <b>User Profile Request</b> – The MCI provides requesting CSCIs or CSCs with access to user profile information such as e-mail address and shipping address to support their processing activities.
RMS (cont.)	One per address request	<i>Processes:</i> EcMsAcOrderSvr <i>Libraries:</i> MsAcCInt, MsAcComm	<i>Process:</i> EcDsDistributionServer <i>Library:</i> DsDdSSh <i>Class:</i> DsDdMedia	<b>Order/Request Updates</b> - The DDIST CSCI interfaces with the <b>MCI</b> Accountability Service Order/Request Tracking to create/update a user product order request.
Return User Profile	One profile per request	<i>Process:</i> EcDsDistributionServer <i>Library:</i> DsDdSSh <i>Class:</i> DsDdMedia	<i>Process:</i> EcMsAcRegUserSvr <i>Libraries:</i> MsAcCInt, MsAcComm <i>Class:</i> MsAcUsrProfile	The <b>EcMsAcRegUserSvr</b> returns user profile information requested by the EcDsDistributionServer.

**Table 4.1-9. DDIST CSCI Process Interface Events (8 of 8)**

Event	Event Frequency	Interface	Initiated By	Event Description
Return Order Status	One per order request	<i>Process:</i> EcDsDistributionServer <i>Library:</i> DsDdSSh <i>Classes:</i> DsDdMedia, DsDdRequestMgrServer	<i>Process:</i> EcMsAcOrderSrvr <i>Library:</i> MsAcCInt <i>Class:</i> EcAcOrderCMgr	The <b>EcMsAcOrderSrvr</b> provides order status information (i.e., Order ID, Request ID) for products requested by the EcDsDistributionServer.
Return Configuration Parameters	One set per request	<i>Process:</i> EcDsDistributionServer <i>Library:</i> EcCsRegistry <i>Class:</i> EcRgRegistryServer_C	<i>Process:</i> EcCsRegistry <i>Library:</i> EcCsRegistry <i>Class:</i> EcRgRegistryServer_C	The <b>EcCsRegistry</b> returns the attribute-value pairs (configuration parameters) to the EcDsDistributionServer upon request.

#### 4.1.2.6 Data Distribution Data Stores

Table 4.1-10 provides descriptions of the individual DDIST CSCI data stores entitled collectively “DDIST Data Stores” in the DDIST CSCI architecture diagram. More details on these database tables can be found in the Data Distribution Database Design and Schema Specifications for the ECS Project.

**Table 4.1-10. DDIST CSCI Data Stores (1 of 2)**

Data Store	Type	Description
DsDdFile	Sybase	This data store holds the distribution files maintained/processed by the EcDsDistributionServer. Table Abbreviation "F" is used as the standard naming convention for stored procedures.
DsDdGranule	Sybase	This data store holds the distribution granule maintained/processed by the EcDsDistributionServer. Table Abbreviation "G" is used as the standard naming convention for stored procedures.

**Table 4.1-10. DDIST CSCI Data Stores (2 of 2)**

Data Store	Type	Description
DsDdParameterList	Sybase	This data store holds the GIParameter list for each request maintained/processed by the EcDsDistributionServer. The EcDsScienceDataServer provides data from external metadata (i.e., via the MCF). Request information is initiated here first. Table abbreviation "PL" is used as the standard naming convention for stored procedures.
DsDdRequest	Sybase	This data store holds the distribution requests maintained/processed by the EcDsDistributionServer. Table abbreviation "R" is used as the standard naming convention for stored procedures.
DsDdServerGeneric	Sybase	This data store holds generic configuration settings for the EcDsDistributionServer.
DsDdParameterListArchive	Sybase	This data store holds all versions of the GL Parameter list for each request currently being maintained and processed by the EcDsDistributionServer. Each time a request is edited, a new row is added to this table.
DsDdRequestArchive	Sybase	This data store holds all versions of the distribution requests currently being maintained and processed by the EcDsDistributionServer. Each time a request is edited, a new row is added to the data store.

### 4.1.3 Storage Management Software Description

#### 4.1.3.1 Storage Management Functional Overview

The Storage Management (STMGT) CSCI stores/archives, manages, and retrieves non-document earth science data and provides a user-friendly graphical user interface (GUI) for operations. The STMGT CSCI manages all physical storage resources for all the DSS CSCIs and processes including: tape robotic archive, RAID disk cache, on-line storage, and peripheral devices used for ingesting data from and distributing data to hard media such as various hard media sizes or drive types.

The STMGT CSCI manages both long-term, high capacity archival of data (data repository) and short term/temporary storage (working storage/cache management). The STMGT CSCI controls associated file access services to the archive, handles short-term data storage needs for the INGST CSCI, the DDIST CSCI, the SDSRV CSCI, and the PRONG CSCI. The STMGT CSCI also provides access to hard media peripheral devices for both the INGST CSCI and the DDIST CSCI.

During data ingest, the STMGT CSCI provides interfaces to enable ingest and obtain access to disk space, FTP services, and shared resource peripheral devices. The STMGT CSCI copies files into the archive for permanent storage. During data distribution, the SDSRV CSCI and the


DDIST CSCI copy files from the archive and allocates magnetic disk space for staging the files. The DDIST CSCI also allocates the peripheral devices shared with the INGST CSCI for copying of files to hard media, or to copy files for electronic distribution. The STMGT CSCI maintains a user pull area to allow for electronic pull distribution.

The STMGT CSCI provides retrieval and storage methods to the DDIST CSCI and the SDSRV CSCI to support storing and providing data for their client CSCIs. The PRONG CSCI is a client CSCI in both storage and retrieval requests by retrieving lower level data via FTP Push Acquire through the SDSRV and DDIST CSCIs and by storing data via insert request to the SDSRV CSCI. In addition to the product files created by the PRONG CSCI, the following types of files are stored for the PRONG CSCI: intermediate product files (interim files), production history files, metadata files, and lower level data files such as raw science data. The STMGT CSCI stores files as a result of insert requests to the SDSRV CSCI by the INGST CSCI and the PRONG CSCI. The STMGT CSCI retrieves files from the archive to satisfy sub-setting requests submitted to the SDSRV CSCI and by acquire requests submitted to the SDSRV CSCI and routed through the DDIST CSCI.

The STMGT GUI provides a simple and consistent interface to set various system parameters, identify errors, analyze the underlying problem(s), and develop corrective measures. The persistence of the data is maintained in a database through a STMGT GUI interface. The GUI provides a method to manage system resources such as servers, cache thresholds, on-line storage availability, and peripherals. The GUI also provides the operator with the capability to track the status of files, hard media, and drives for an enhanced level of quality control.

#### **4.1.3.2 Storage Management Context**

Figure 4.1-6 is the STMGT CSCI context diagram. The diagram shows the events sent to other CSCIs and events received from other CSCIs. The STMGT CSCI has a direct interface with the INGST CSCI. **Note:** any items italicized and inside of < > are items which show consistency across the diagrams. These items do not have descriptions in the table associated with the diagram, but are shown in a previous diagram and described in a previous table.

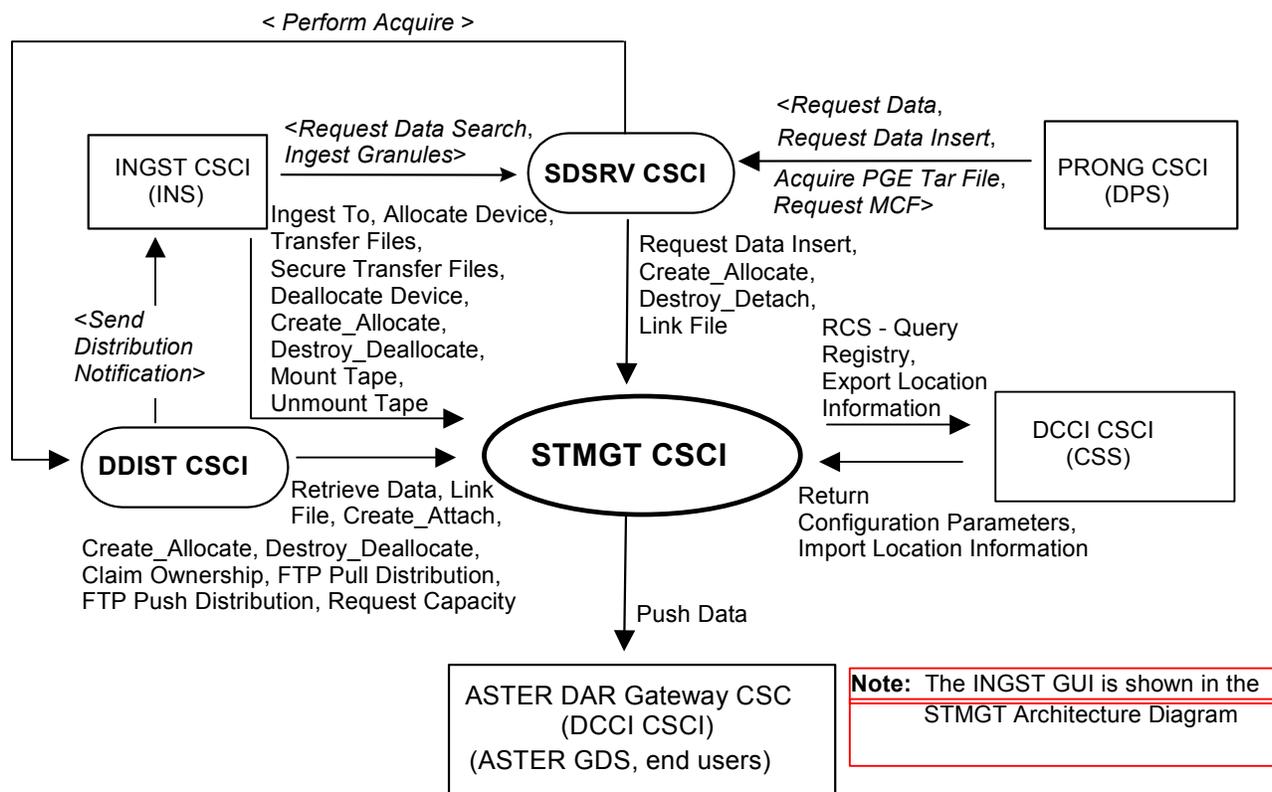

**Figure 4.1-6. STMGT CSCI Context Diagram**

Table 4.1-11 provides descriptions of the interface events shown in the STMGT CSCI context diagram.

**Table 4.1-11. STMGT CSCI Interface Events (1 of 3)**

Event	Interface Event Description
Request Management Services	<b>System startup and shutdown</b> - Please refer to the release-related, current version of the Mission Operations Procedures for the ECS Project document (611) and the current ECS Project Training Material document (625), identified in Section 2.2.1 of this document.
Request Data	The <b>PRONG CSCI</b> sends data retrieval requests to the SDSRV CSCI. The SDSRV CSCI sends the data retrieval request to the DDIST CSCI. The DDIST CSCI puts the request in a queue with the appropriate priority. When the request is taken from the queue, the STMGT CSCI is passed the data retrieval request from the DDIST CSCI for a particular data granule to be pushed onto the DPS science processor, via the FTP service. The data granule is to be used as input for PGE processing or for SSIT work.
Request Data Insert	The <b>PRONG CSCI</b> sends data insert requests to the SDSRV CSCI. The SDSRV CSCI sends the data insert request to the STMGT CSCI. The STMGT CSCI receives the data insert request for a particular file or files to be inserted into the archive, and their metadata be catalogued into the SDSRV inventory, as a granule of a particular ESDT short name and version. These files can be processing output, static files received with PGEs, PGE Tape Archive (TAR) files, APs, SSAPs or DAPs, failed PGE tar files, or production history files.
Acquire PGE Tar File	The <b>PRONG CSCI</b> sends requests to the SDSRV CSCI to acquire a tar file for any PGE not currently local to the science processor. The executable is extracted from the tar file and used during PGE execution in the PRONG CSCI.
Request MCF	The <b>PRONG CSCI</b> requests the MCF from the SDSRV CSCI for a particular ESDT short name prior to a data insert request.
Create_Allocate	The STMGT CSCI receives requests from the <b>DDIST CSCI</b> and <b>INGST CSCI</b> to allocate areas on the local staging disk to store data for distribution. The SDSRV CSCI sends requests to the STMGT CSCI to allocate areas on the local staging disk to store ingested data or output files from routine data processing or SSIT work.
Destroy_Detach	The <b>SDSRV CSCI</b> sends requests to the STMGT CSCI to detach from a staging disk area (lose access to an existing staging disk area owned by another process).
Link File	The <b>SDSRV</b> and <b>DDIST CSCIs</b> sends requests to the STMGT CSCI to link files from read-only cache or a staging disk to a staging disk specified in the request.

**Table 4.1-11. STMGT CSCI Interface Events (2 of 3)**

Event	Interface Event Description
Request Communications Support	<p>The <b>DCCI CSCI</b> provides a library of services available to each SDPS and CSMS CSCI. The CSCI services required to perform specific assignments are requested from the DCCI CSCI. These services include:</p> <ul style="list-style-type: none"> <li>• CCS Middleware Support</li> <li>• Database Connection Services</li> <li>• Name/Address Services</li> <li>• Server Request Framework (SRF)</li> <li>• Error/Event Logging</li> <li>• Fault Handling Services</li> <li>• Mode Information</li> <li>• Query Registry - Retrieving the requested configuration attribute-value pairs from the Configuration Registry</li> <li>• Request Distribution Media Options from the Configuration Registry</li> </ul>
Export Location Information	<p>The CCS Middleware CSC stores physical and logical location information received from the STMGT CSCI in the <b>DCCI CSCI</b> (CCS NameServer via the Server Locator).</p>
Return Configuration Parameters	<p>The <b>DCCI CSCI</b> returns the requested configuration parameters to the STMGT CSCI.</p>
Import Location Information	<p>The STMGT CSCI requests server location information from the <b>DCCI CSCI</b> (CCS NameServer via the Server Locator).</p>
Push Data	<p>The STMGT CSCI pushes data (i.e., EDS), via the FTP service and an FTP Daemon, to the <b>ASTER DAR Gateway</b> for data distribution per user request. A signal file is also sent to indicate the completion of the file transfer by particular ESDTs that function this way.</p>
Retrieve Data	<p>The <b>SDSRV CSCI</b> sends requests to the STMGT CSCI to retrieve data or products from the archival storage.</p>
Create_Attach	<p>The STMGT CSCI receives requests from the <b>DDIST CSCI</b> to attach (gain access to an existing staging disk area allocated by another process) to a staging disk area.</p>
Create_Allocate	<p>The STMGT CSCI receives requests from the <b>DDIST CSCI</b> and <b>INGST</b> to allocate areas on the local staging disk to store data for distribution.</p>
Destroy_Deallocate	<p>The STMGT CSCI receives requests from the <b>DDIST CSCI</b> and <b>INGST CSCI</b> to deallocate (lose access to) an existing staging disk area.</p>
Claim Ownership	<p>The STMGT CSCI receives requests from the <b>DDIST CSCI</b> to claim ownership of (take responsibility for deallocating) an existing staging disk area.</p>
FTP Pull Distribution	<p>The STMGT CSCI receives requests from the <b>DDIST CSCI</b> to move a file to the Pull area.</p>
FTP Push Distribution	<p>The STMGT CSCI receives requests from the <b>DDIST CSCI</b> to distribute a file directly to the user via a predetermined local disk area accessible by the user.</p>

**Table 4.1-11. STMGT CSCI Interface Events (3 of 3)**

Event	Interface Event Description
Request Capacity	The <b>DDIST CSCI</b> sends requests to the STMGT CSCI to get the effective maximum capacity of a media type. This information is used to determine the number of media needed to satisfy a given request.
Send Distribution Notification	The <b>DDIST CSCI</b> sends a distribution notification, via e-mail, to the <b>INGST CSCI</b> when data being distributed is to be ingested.
Perform Acquire	A request is sent from the <b>SDSRV CSCI</b> to the <b>DDIST CSCI</b> for science data or a product to be sent to a specified user. The <b>SDSRV CSCI</b> assembles instructions to send data and sends the instructions to the <b>DDIST CSCI</b> . The <b>DDIST CSCI</b> stores the request received from the <b>SDSRV CSCI</b> in a queue with the appropriate priority. The <b>DDIST CSCI</b> sends a request to the <b>STMGT CSCI</b> to push the data, via the FTP service. When the request is taken from the queue, the <b>STMGT CSCI</b> is passed the data retrieval request from the <b>DDIST CSCI</b> for a particular data granule to be pushed onto the <b>DPS science processor</b> , via the FTP service. The data granule is to be used as input for <b>PGE processing</b> or for <b>SSIT work</b> .
Request Data Search	The <b>INGST CSCI</b> sends a search request to the <b>SDSRV CSCI</b> for a granule corresponding to a particular <b>ESDT short name</b> and version, which has a particular local granule id.
Ingest Granules	The <b>INGST CSCI</b> sends requests to the <b>SDSRV CSCI</b> to insert a particular file or files into the <b>SDSRV inventory</b> and archive. Inserted data is accompanied by metadata. The metadata is catalogued in the <b>SDSRV inventory</b> as a granule of a particular <b>ESDT short name</b> and version.
Ingest To	The <b>INGST CSCI</b> sends requests to the <b>STMGT CSCI</b> to copy files from peripheral resources to staging disk areas.
Allocate Device	The <b>INGST CSCI</b> sends requests to the <b>STMGT CSCI</b> to allocate peripheral devices for data ingesting.
Transfer Files	The <b>INGST CSCI</b> sends requests to the <b>STMGT CSCI</b> to transfer (copy) data files to a staging disk.
Secure Transfer Files	The <b>INGST CSCI</b> sends requests to the <b>STMGT CSCI</b> to secure transfer (scp) data files to a staging disk.
Deallocate Device	The <b>INGST CSCI</b> sends requests to the <b>STMGT CSCI</b> to deallocate previously allocated peripheral resources.
Mount Tape	The <b>INGST CSCI</b> process sends requests to the <b>STMGT CSCI</b> to load tapes to hardware peripherals for reading the tapes.
Unmount Tape	The <b>INGST CSCI</b> process sends requests to the <b>STMGT CSCI</b> to unload and detach tapes from hardware peripherals after reading or writing to the tapes.

### 4.1.3.3 Storage Management Architecture

**Note:** All interface events from a client to the **STMGT CSCI** pass through the Request Manager process. For external processes sending interface events to the Request Manager, the sequence is external process to the Request Manager to the Sybase ASE check-pointing tables to the **STMGT** process. For internal processes within the **STMGT CSCI**, the sequence is **STMGT** process to the Sybase ASE tables to the receiving **STMGT** process. Figure 4.1-7 below illustrates the flow of requests in an FTP Pull distribution from the **DDIST CSCI** to the **STMGT CSCI**.

The STMGT CSCI architecture diagram consists of three diagrams to better display the functionality of the STMGT CSCI. Figure 4.1-8 is the STMGT CSCI INGEST architecture diagram. Figure 4.1-9 is the STMGT CSCI DISTRIBUTION STAGING architecture diagram. Figure 4.1-10 is the STMGT CSCI DISTRIBUTION TRANSFER architecture diagram. The diagrams show the events sent to the STMGT CSCI processes and the events the STMGT CSCI processes sends to other processes or gateways for remote systems such as the ASTER GDS. **Note:** any items italicized and inside of < > are items which show consistency across the diagrams. These items do not have descriptions in the table associated with the diagram, but are shown in a previous diagram and described in a previous table. Figure 4.1-11 is the STMGT CSCI Registry architecture diagrams showing the interaction between the STMGT CSCI and the DCCI CSCI Registry Server.


Table 4.1-13 provides descriptions of the interface events shown in the STMGT CSCI INGEST architecture diagram. Table 4.1-14 provides descriptions of the interface events shown in the STMGT CSCI DISTRIBUTION STAGING architecture diagram. Table 4.1-15 provides descriptions of the interface events shown in the STMGT CSCI DISTRIBUTION TRANSFER architecture diagram. Table 4.1-16 provides descriptions of the interface events shown in the STMGT CSCI and DCCI CSCI Registry Server architecture diagrams.

The STMGT CSCI is composed of the following processes:


- EcDsStArchiveServer (used for archiving data)
- EcDsStCacheManagerServer and EcDsStStagingDiskServer (used for staging data)
- EcDsSt8MMServer and EcDsStDTFServer (used for hard media resource management)
- EcDsStPullMonitorServer (used for electronic data transfer)
- EcDsStRequestManagerServer (used to route requests from clients to servers)
- EcDsStCopyServer (used to execute scp requests from EcDsStFtpServer)

The STMGT GUI software (EcDsStmgGui) is an interface with the database to set parameter configurations and to monitor and manage the servers.


The Archival Management and Storage System (AMASS) is an automated library management system. See the AMASS Release Notes for version 5.3.1 from vendor ADIC. The release notes are provided as part of Pre-Ship Review (PSR) document #914-TDA-234 for AMASS 5.3.1 released on 03/24/2003 for more information about the AMASS management and storage system.

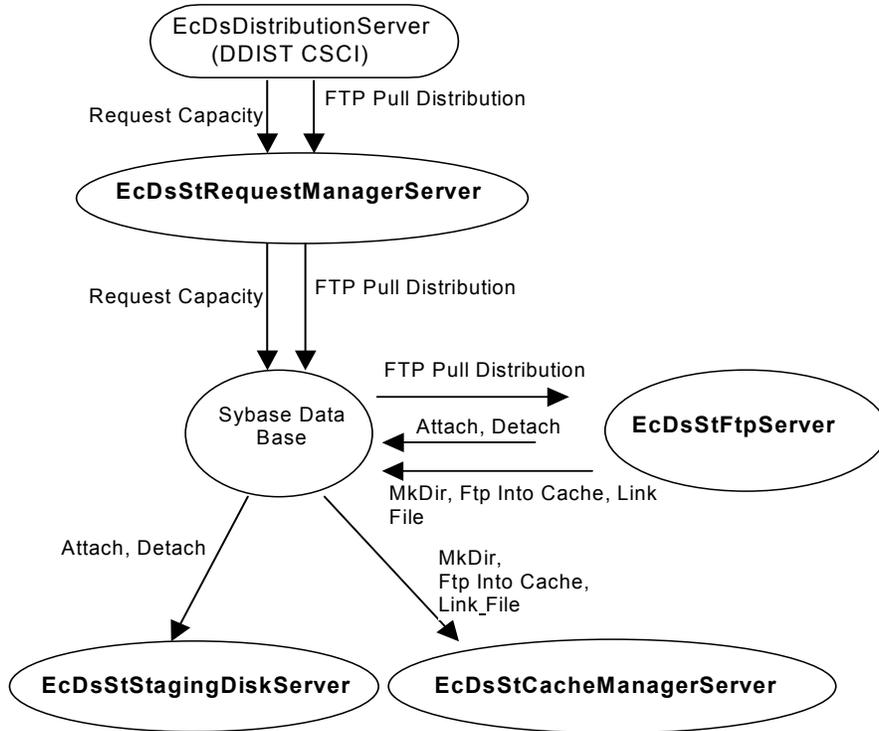

**Figure 4.1-7. Sample FTP Pull Distribution Request**

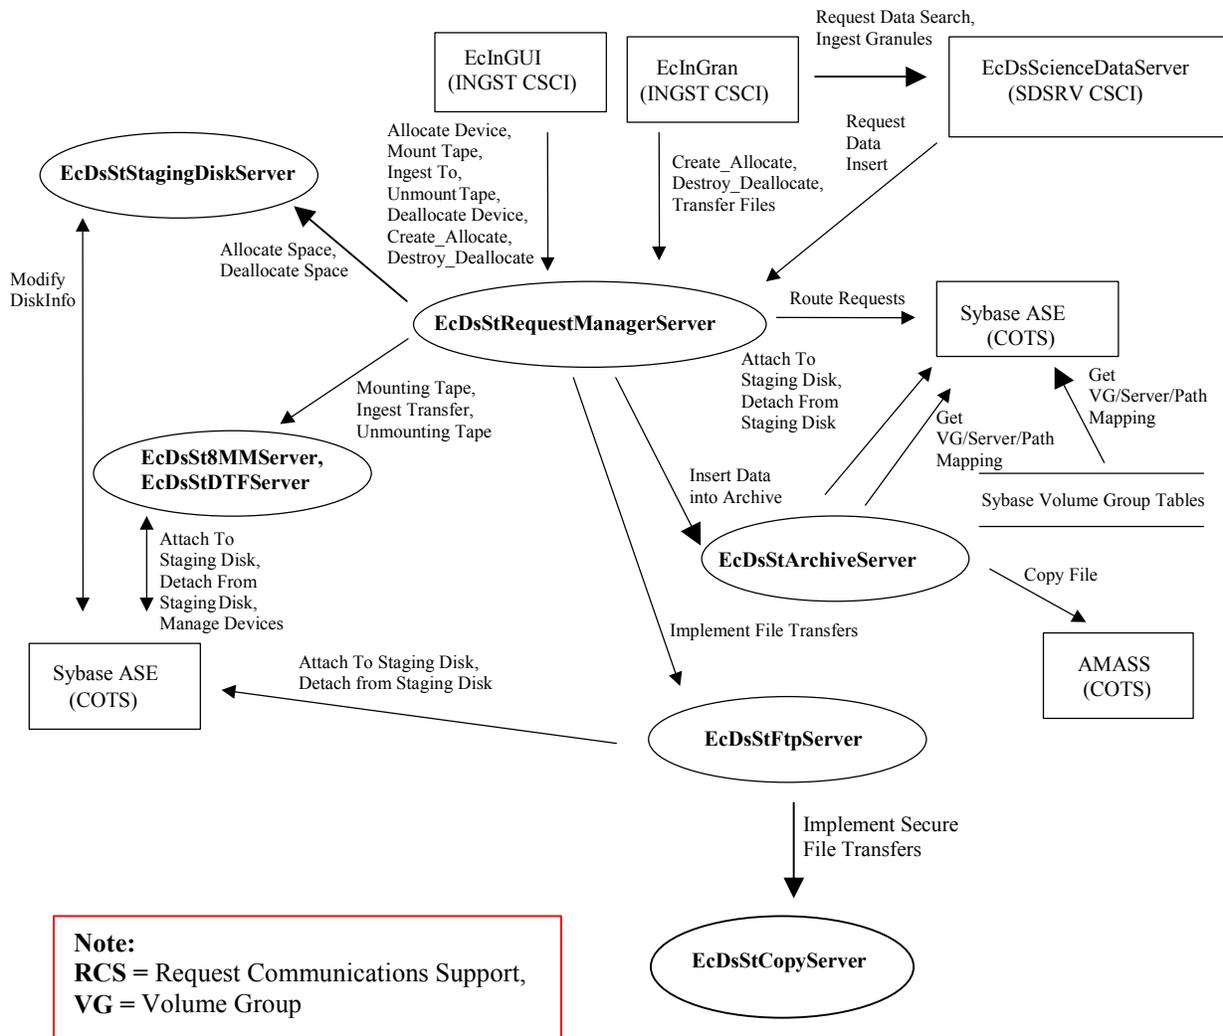


**Figure 4.1-8. STMG CSCI INGEST Architecture Diagram**

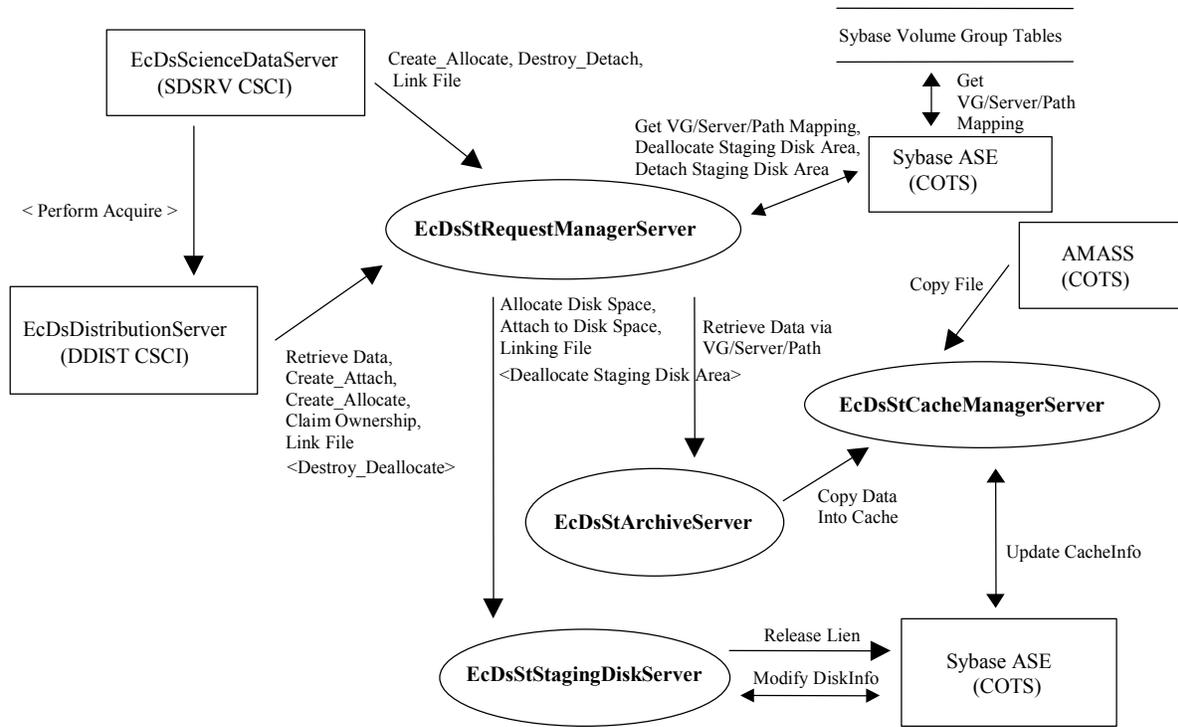


**Note:**  
**RCS** = Request Communications Support,  
**VG** = Volume Group


**Figure 4.1-9. STMG T CSCI DISTRIBUTION STAGING Architecture Diagram**

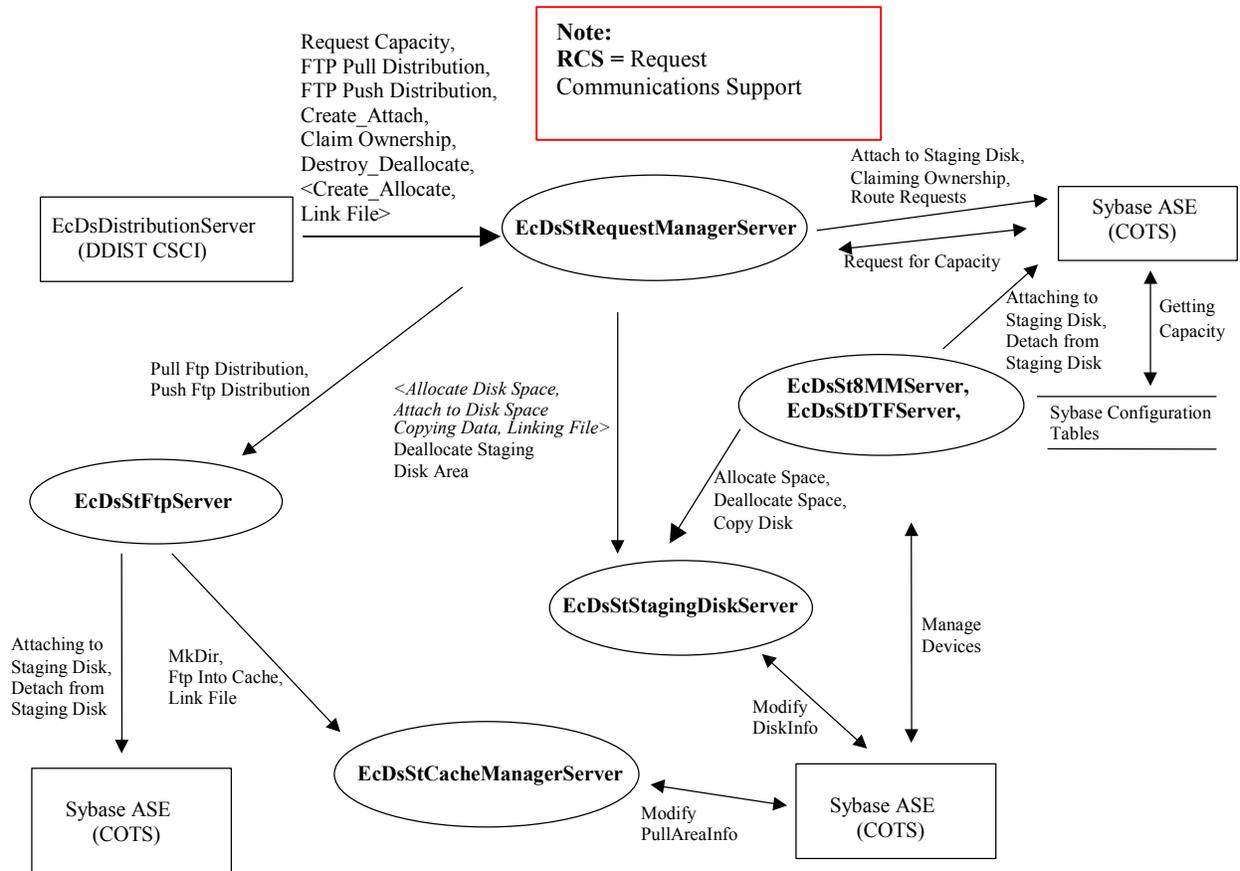

**Figure 4.1-10. STMGT CSCI DISTRIBUTION TRANSFER Architecture Diagram**

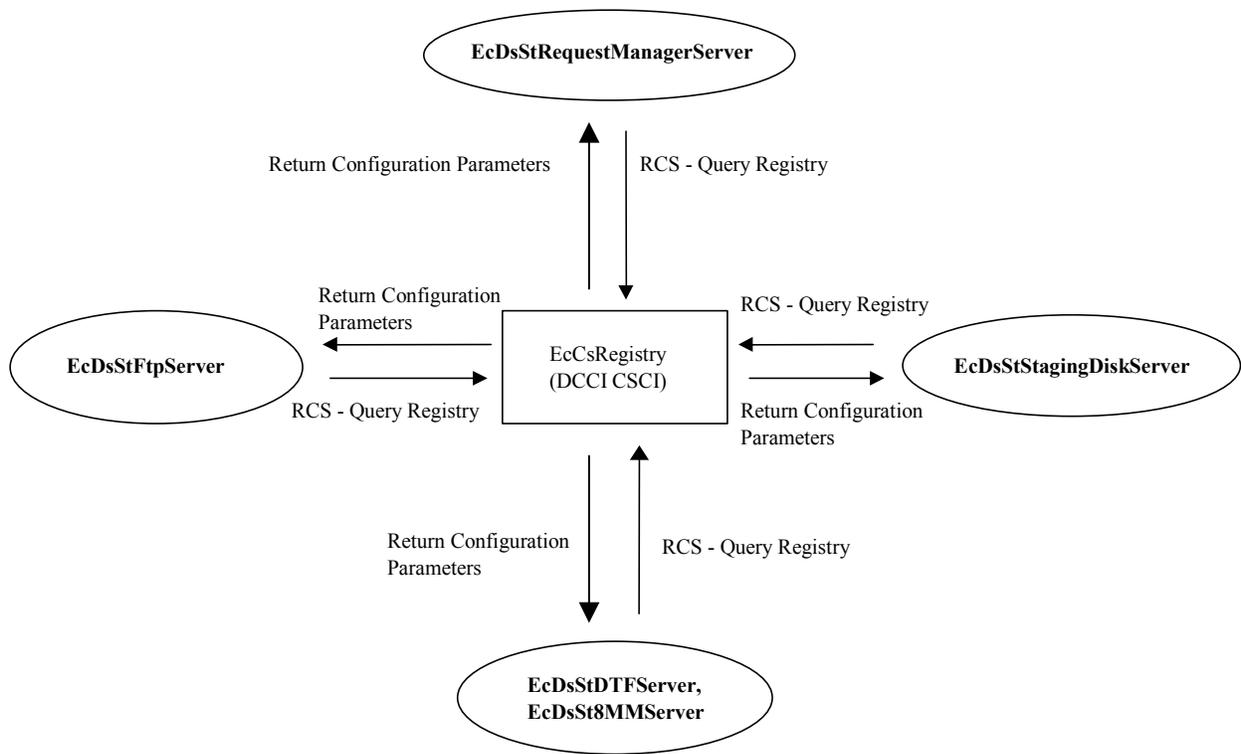

**Figure 4.1-11. STMG CSCI Registry Architecture Diagram**

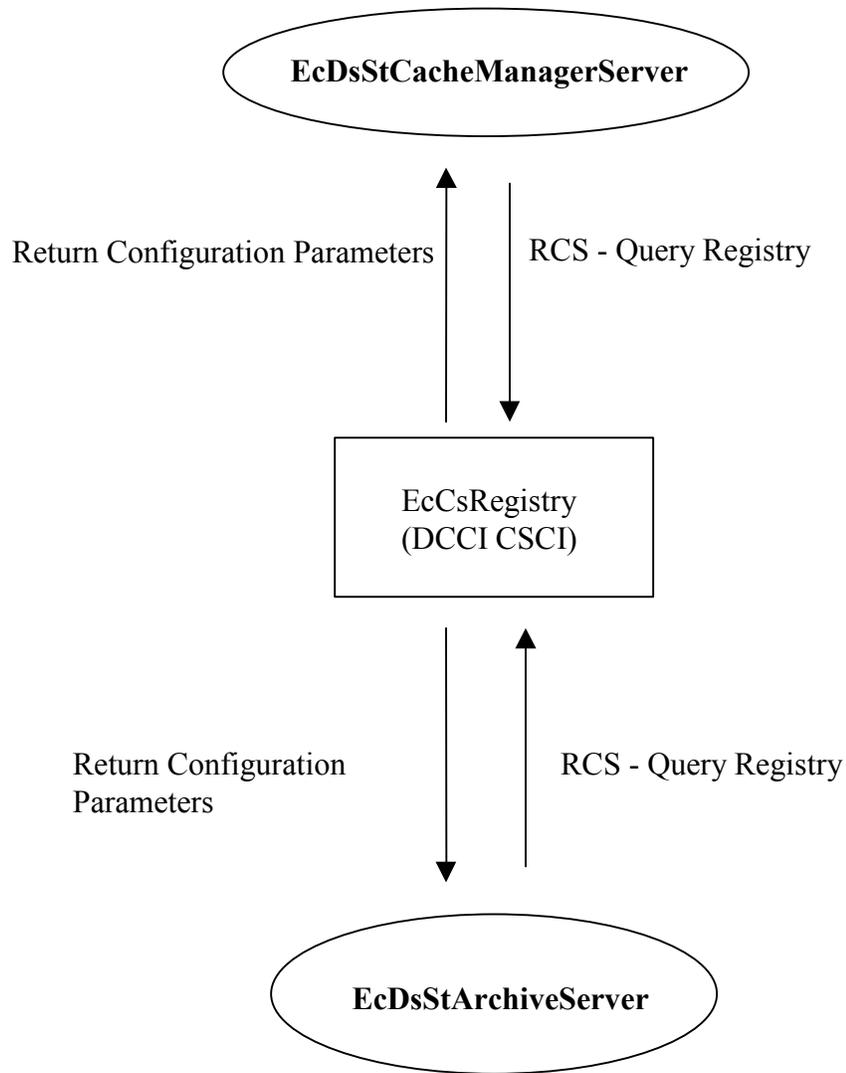

**Figure 4.1-11. STMGT CSCI Registry Architecture Diagram (cont.)**

#### 4.1.3.4 Storage Management Process Descriptions

Table 4.1-12 provides descriptions of the processes shown in the STMGT CSCI INGEST, DISTRIBUTION STAGING, and DISTRIBUTION TRANSFER architecture diagrams, respectively.

**Table 4.1-12. STMGT CSCI Processes (1 of 2)**

Process	Type	COTS/ Developed	Functionality
EcDsStArchiveServer	Server	Developed	An Archive Server provides access to stored data. There can be multiple archive servers running at a given site, each with its own type of data or storage media. For requests retrieving files from the Archive, the staging disk is located on the same host as the Archive. For data being inserted, based on network architecture, files are moved to a staging disk located on a node with the appropriate network access. Within STMGT, ESDTs are allocated to Archive instances.
EcDsStCacheManagerServer	Server	Developed	The Cache Manager Server manages the group of data files retrieved from the archive and placed into a cache area on a staging disk. A list of these data files is maintained so subsequent data retrieval requests are fulfilled immediately without requiring an additional archive access. The Cache Manager Server also deletes files, which are no longer used to prevent the cache area from becoming too full. The STMGT CSCI supports multiple cache managers.
EcDsStStagingDiskServer	Server	Developed	The Staging Disk Server manages shared disk space. The Staging Disk Server enables disk space allocations and file reservations between staging directories and from non-staging to staging directories. The STMGT software supports multiple instances of the Staging Disk Server.
EcDsStPullMonitorServer	Server	Developed	The Pull Monitor Server manages the files in the user pull area. As ECS users retrieve files (i.e., files are electronically pulled) from the user pull area or as the files become stale (their time-out periods have expired), the Pull Monitor Server deletes them. Several algorithms are available for monitoring and maintaining the data levels at a specified capacity. <b>Note:</b> This is just a symbolic link to the Cache Manager Server binary executable image.
(Media Server) EcDsSt8MMServer, EcDsStDTFServer	Servers	Developed	The Media Server schedules access to share peripheral devices. Queues are maintained for requests based on priority and request receipt time. Each type of media pool has its own Media Server. Individual Media Servers identified are 8mm tape and DTF Tape. The STMGT software supports multiple instances of each type of Media Server.
EcDsStFtpServer	Server	Developed	The FTP Server manages the electronic transfer of files to and from staging disks. The STMGT software supports multiple instances of the FTP Server.

**Table 4.1-12. STMGT CSCI Processes (2 of 2)**

Process	Type	COTS/ Developed	Functionality
EcDsStRequestManagerServer	Server	Developed	The Request Manager routes requests to the appropriate server for servicing. Priority queuing is enforced for all requests, regardless of type and the status of all requests is centrally maintained in the database. The Request Manager provides the primary point of detection and recovery for unexpected client or server termination.
EcDsStCopyServer	Server	Developed	The Copy Server performs secure file copies between remote and local on behalf of the FTP Server.
AMASS	Server	COTS	Provides a Unix File System interface to the robotics to control the media where data is written and read.
Sybase ASE	Server	COTS	The Sybase ASE interacts with other STMGT CSCI servers to copy files to be stored in the ECS archives via AMASS, to store schedules for media distribution processing, to create and delete staging disk storage areas, and to allow Operations staff to insert or update data distribution information.

#### 4.1.3.5 Storage Management Process Interface Descriptions

Table 4.1-13 provides descriptions of the interface events shown in the STMGT CSCI INGEST architecture diagram.

**Table 4.1-13. STMGT CSCI INGEST Process Interface Events (1 of 7)**

Event	Event Frequency	Interface	Initiated By	Event Description
Create_Allocate	One allocation per request	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<i>Process:</i> EcInGUI <i>Library:</i> InResource <i>Class:</i> InResourceIF  <i>Process:</i> EcInGran <i>Library:</i> InResource <i>Class:</i> InResourceIF	The <b>EcInGUI</b> and <b>EcInGran</b> processes send requests to the EcDsStRequestManagerServer to allocate (create space) areas on the local staging disk to store ingested data.

**Table 4.1-13. STMGT CSCI INGEST Process Interface Events (2 of 7)**

Event	Event Frequency	Interface	Initiated By	Event Description
Destroy_Deallocate	One deallocation per request	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<b><i>Process:</i></b> EclnGUI <i>Library:</i> InResource <i>Class:</i> InResourceIF  <b><i>Process:</i></b> EclnGran <i>Library:</i> InResource <i>Class:</i> InResourceIF	The <b>EclnGUI</b> and <b>EclnGran</b> processes send requests to the EcDsStRequestManagerServer to deallocate (lose access to) an existing staging disk area.
Transfer Files	One per Science Data file activity	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<i>Process:</i> EclnGran <i>Library:</i> InResource <i>Class:</i> InResourceIFProcess	The <b>EclnGran</b> sends a request to the EcDsStRequestManagerServer to transfer (copy) data files to a staging disk.
Request Data Search	One per input pointer in metadata or per granule pointer in linkage file	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Class:</i> DsCIQuery	<i>Process:</i> EclnGran <i>Library:</i> InPreprocess <i>Class:</i> InDataPreProcessTask	The EclnGran process sends a search request to the EcDsScienceDataServer for a granule corresponding to particular ESDT short name and version, which has a particular local granule id.
Ingest Granules	One per ingest request	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Classes:</i> DsCIRequest, DsCICommand, DsGeESDT	<i>Process:</i> EclnGran <i>Library:</i> InPreprocess <i>Class:</i> InDataServerInsertionTask	The EclnGran sends requests to the EcDsScienceDataServer to add new granules to the SDSRV granule inventory after ingesting.

**Table 4.1-13. STMGT CSCI INGEST Process Interface Events (3 of 7)**

Event	Event Frequency	Interface	Initiated By	Event Description
Request Data Insert	One granule insertion per request	<i>Process:</i> EcDsStRequestManager Server <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<i>Process:</i> EcDsScienceDataServer <i>Class:</i> DsGeESDT	The EclnGran process sends requests to the EcDsScienceDataServer to insert a particular file or files into the archive. Inserted data is accompanied by metadata. The metadata is catalogued in the SDSRV inventory as a granule of a particular ESDT short name and version. The <b>EcDsScienceDataServer</b> sends requests to the EcDsStRequestManagerServer to insert data into the SDPS archives, including metadata.
Route Requests	Random from external clients	Sybase ASE (COTS) Database Tables: DsStGenericRequest, DsStArchiveRequest, DsStFtpRequest, DsStMediaRequest, DsStStagingDiskRequest	<i>Process:</i> EcDsStRequestManager Server <i>Library:</i> DsStTmClient <i>Class:</i> DsStCommonDBIF	All requests submitted by external clients are executed within the <b>Sybase ASE</b> database. Requests that can be fulfilled solely by the database ("trivial requests") are satisfied and the results returned to the client with no additional communications with STMGT servers.
Get VG/Server/Path Mapping	One per volume group	Sybase ASE (COTS) [Database Table: DsStVolumeGroup]	<i>Process:</i> EcDsStArchiveServer <i>Library:</i> DsStCmnDb <i>Class:</i> DsStCommonDBIF	The <b>EcDsStArchiveServer</b> obtains the physical Unix path used to store data for the specified ESDT from the Sybase ASE.

**Table 4.1-13. STMGT CSCI INGEST Process Interface Events (4 of 7)**

Event	Event Frequency	Interface	Initiated By	Event Description
Attach To Staging Disk	One per request	Sybase ASE (COTS)	<i>Processes:</i> EcDsStArchiveServer, EcDsStFtpServer, EcDsStDTFServer, EcDsSt8MMServer <i>Library:</i> DsStCmnDb <i>Class:</i> DsStCommonDBIF	The <b>EcDsStArchiveServer</b> , <b>EcDsStFtpServer</b> , <b>EcDsStDTFServer</b> and <b>EcDsSt8MMServer</b> send requests to the Sybase ASE to attach (i.e., gain access) to an existing staging disk area.
Detach From Staging Disk	One per request	Sybase ASE (COTS)	<i>Processes:</i> EcDsStArchiveServer, EcDsStFtpServer, EcDsStDTFServer and EcDsSt8MMServer <i>Library:</i> DsStCmnDb <i>Class:</i> DsStCommonDBIF	The <b>EcDsStArchiveServer</b> , <b>EcDsStFtpServer</b> , <b>EcDsStDTFServer</b> and <b>EcDsSt8MMServer</b> send requests to the Sybase ASE to detach (i.e., lose access) to an existing staging disk area.
Insert Data Into Archive	Per insert request	<i>Process:</i> EcDsStArchiveServer <i>Library:</i> DsStTmServer <i>Class:</i> DsStReceptionist	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStTmClient <i>Class:</i> DsStPatron	The EcDsStRequestManagerServer sends requests to the <b>EcDsStArchiveServer</b> to insert data into the archive.
Copy File	One file insert per request	AMASS (COTS)	<i>Process:</i> EcDsStArchiveServer <i>Library:</i> DsStCmnFileIO <i>Classes:</i> DsStCopyService	The <b>EcDsStArchiveServer</b> inserts data into the archives sending a request for a Unix file copy into the AMASS cache by buffered read/write software.
Implement File Transfers	One per Science Data file activity	<i>Process:</i> EcDsStFtpServer <i>Library:</i> DsStTmServer <i>Class:</i> DsStReceptionist	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStTmClient <i>Class:</i> DsStPatron	The EcDsStRequestManagerServer forwards the transfer (or staging) request to the <b>EcDsStFtpServer</b> for processing.

**Table 4.1-13. STMGT CSCI INGEST Process Interface Events (5 of 7)**

Event	Event Frequency	Interface	Initiated By	Event Description
Implement Secure File Transfers	One secure transfer per request	<i>Script (Perl):</i> EcDsStCopyServer	<i>Process:</i> EcDsStFtpServer <i>Library:</i> DsStSecureCopyClient <i>Class:</i> DsStSecureCopyClient	The EcDsStFtpServer sends a request to the <b>EcDsStCopyServer</b> to make a secure transfer of files as requested by the Data Provider.
Manage Devices	One per media	Sybase ASE (COTS) [Database Tables: DsStDevice, DsStSlot, DsStStacker]	<i>Processes:</i> EcDsStDTFServer, EcDsSt8MMServer <i>Library:</i> DsStCmnDb <i>Class:</i> DsStCommonDBIF	The <b>EcDsStDTFServer</b> uses database tables obtained via the Sybase ASE to determine if a drive is available to handle the request. The Sybase ASE updates its device, slot, and stacker tables (data stores).
Modify DiskInfo	One per ingest	Sybase ASE (COTS) [Database Tables: DsStStagingDisk, DsStStagingDiskLien, DsStStagingDiskFile]	<i>Process:</i> EcDsStStagingDiskServer <i>Library:</i> DsStSdServer <i>Class:</i> DsStStagingDiskService Thread	The <b>EcDsStStagingDiskServer</b> submits a request to the Sybase ASE to update the availability of space on the local disk. The Sybase ASE updates its staging area tables (data stores).
Allocate Space	One allocation per request	<i>Process:</i> EcDsStStagingDiskServer <i>Library:</i> DsStTmServer <i>Class:</i> DsStReceptionist	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStTmClient <i>Class:</i> DsStPatron	The EcDsStRequestManagerServer forwards the request (Create_Allocate) to the <b>EcDsStStagingDiskServer</b> for processing.
Deallocate Space	One deallocation per request	<i>Process:</i> EcDsStStagingDiskServer <i>Library:</i> DsStTmServer <i>Class:</i> DsStReceptionist	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStTmClient <i>Class:</i> DsStPatron	The EcDsStRequestManagerServer forwards the request (Destroy_Deallocate) to the <b>EcDsStStagingDiskServer</b> for processing.

**Table 4.1-13. STMGT CSCI INGEST Process Interface Events (6 of 7)**

Event	Event Frequency	Interface	Initiated By	Event Description
Mounting Tape	One per physical tape	<i>Processes:</i> EcDsStDTFServer, EcDsSt8MMServer <i>Library:</i> DsStTmServer <i>Class:</i> DsStReceptionist	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStTmClient <i>Class:</i> DsStPatron	The EcDsStRequestManagerServer forwards the request to the <b>EcDsSt8MMServer</b> and <b>EcDsStDTFServer</b> for processing.
Ingest Transfer	One data copy from peripheral device(s) per request	<i>Processes:</i> EcDsStDTFServer, EcDsSt8MMServer <i>Library:</i> DsStTmServer <i>Class:</i> DsStReceptionist	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStTmClient <i>Class:</i> DsStPatron	The EcDsStRequestManagerServer forwards the request to the <b>EcDsSt8MMServer</b> and <b>EcDsStDTFServer</b> for processing.
Unmounting Tape	One per physical tape	<i>Processes:</i> EcDsStDTFServer, EcDsSt8MMServer <i>Library:</i> DsStTmServer <i>Class:</i> DsStReceptionist	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStTmClient <i>Class:</i> DsStPatron	The EcDsStRequestManagerServer forwards the request to the <b>EcDsSt8MMServer</b> and <b>EcDsStDTFServer</b> for processing.
Allocate Device	One allocation per request	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<i>Process:</i> EcInGUI <i>Library:</i> InResource <i>Class:</i> InResourceIF	The <b>EcInGUI</b> sends requests to the EcDsStRequestManagerServer to allocate peripheral devices for data ingesting.
Mount Tape	One per physical tape	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<i>Process:</i> EcInGUI <i>Library:</i> InResource <i>Class:</i> InResourceIF	The <b>EcInGUI</b> process sends requests to the EcDsStRequestManagerServer to load tapes to hardware peripherals for reading the tapes.

**Table 4.1-13. STMGT CSCI INGEST Process Interface Events (7 of 7)**

<b>Event</b>	<b>Event Frequency</b>	<b>Interface</b>	<b>Initiated By</b>	<b>Event Description</b>
Ingest To	One data copy from peripheral device(s) per request	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<i>Process:</i> EcInGUI <i>Library:</i> InResource <i>Class:</i> InResourceIF	The <b>EcInGUI</b> process sends requests to the EcDsStRequestManagerServer to copy files from peripheral resources to staging disk areas.
Unmount Tape	One per physical tape	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<i>Process:</i> EcInGUI <i>Library:</i> InResource <i>Class:</i> InResourceIF	The <b>EcInGUI</b> process sends requests to the EcDsStRequestManagerServer to unload and detach tapes from hardware peripherals after reading or writing to the tapes.
Deallocate Device	One deallocation per request	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<i>Process:</i> EcInGUI <i>Library:</i> InResource <i>Class:</i> InResourceIF	The <b>EcInGUI</b> sends requests to the EcDsStRequestManagerServer to deallocate the previously allocated media resource.

Table 4.1-14 provides descriptions of the interface events shown in the STMGT CSCI DISTRIBUTION STAGING architecture diagram.

**Table 4.1-14. STMGT CSCI DISTRIBUTION STAGING Process Interface Events  
(1 of 4)**

Event	Event Frequency	Interface	Initiated By	Event Description
Get VG/Server/Path Mapping	One per volume group	Sybase ASE (COTS) [Database Tables: DsStVolumeGroup]	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStCmnDb <i>Class:</i> DsStDBIFTransaction	The EcDsStRequestManagerServer obtains the physical Unix path used to store data for the specified ESDT from the <b>Sybase ASE</b> .
Deallocate Staging Disk Space	One per attach request	Sybase ASE (COTS)	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStCmnDb <i>Class:</i> DsStDBIFTransaction	The EcDsStRequestManagerServer sends a request to the <b>Sybase ASE</b> to deallocate an existing staging disk area.
Detach Staging Disk Area	One detach per request	<i>Process:</i> EcDsStStagingDiskServer <i>Library:</i> DsStTmServer <i>Class:</i> DsStReceptionist	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStTmClient <i>Class:</i> DsStPatron	The EcDsStRequestManagerServer forwards the requests to the <b>EcDsStStagingDiskServer</b> for processing.
Copy file	One file copy per request	AMASS (COTS)	<i>Process:</i> EcDsStCacheManagerServer <i>Library:</i> DsStCmnFileIO <i>Classes:</i> DsStCopyService	The EcDsStCacheManagerServer sends requests for a Unix file copy from the AMASS cache to the read-only cache by buffered read/write software.
Retrieve Data via VG/Server/Path	One per request	<i>Process:</i> EcDsStArchiveServer <i>Library:</i> DsStTmServer <i>Class:</i> DsStReceptionist	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStTmClient <i>Class:</i> DsStPatron	The EcDsStRequestManagerServer forwards the requests to retrieve archived data from the archive to the <b>EcDsStArchiveServer</b> .

**Table 4.1-14. STMG T CSC I DISTRIBUTION STAGING Process Interface Events  
(2 of 4)**

Event	Event Frequency	Interface	Initiated By	Event Description
Copy Data Into Cache	One for each file per request	<i>Process:</i> EcDsStCacheManagerServer <i>Library:</i> DsStTmServer <i>Class:</i> DsStReceptionist	<i>Process:</i> EcDsStArchiveServer <i>Library:</i> DsStTmClient <i>Class:</i> DsStCacheManagerAsyncIF	The EcDsStArchiveServer sends requests to the EcDsStCacheManagerServer to move data from the archives to the read-only cache.
Update CacheInfo	One file copy per request	Sybase ASE (COTS) [Database Tables: DsStCache, DsStCacheFile, DsStDeleteLogCacheFile]	<i>Process:</i> EcDsStCacheManagerServer <i>Library:</i> DsStCmnDb <i>Class:</i> DsStDBIFTransaction	The EcDsStCacheManagerServer submits requests to the Sybase ASE to update the availability of space in the read-only cache upon receiving requests to move data from the EcDsStArchiveServer.
Modify DiskInfo	Two per request (one each for allocation and deallocation)	Sybase ASE (COTS) [Database Table: DsStStagingDisk, DsStStagingDiskLien, DsStStagingDiskFile]	<i>Process:</i> EcDsStStagingDiskServer <i>Library:</i> DsStCmnDb <i>Class:</i> DsStDBIFTransaction	The EcDsStStagingDiskServer submits a request to the Sybase ASE to update the availability of space on the local disk. The Sybase ASE updates its staging area tables (data stores).
Release Lien	One per file copied	Sybase ASE (COTS) [Database Table: DsStStagingDisk, DsStStagingDiskLien, DsStStagingDiskFile]	<i>Process:</i> EcDsStStagingDiskServer <i>Library:</i> DsStCmnDb <i>Class:</i> DsStDBIFTransaction	The EcDsStStagingDiskServer sends requests to the Sybase ASE to decrease the access count to a given file. This is done after a file has been copied or a link to a file in the cache has been removed.
Retrieve Data	One granule per retrieval request	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<i>Process:</i> EcDsDistributionServer <i>Class:</i> DsDdGranuleS	The <b>EcDsDistributionServer</b> sends requests to the EcDsStRequestManagerServer to retrieve data from the SDPS archives to be staged for distribution. The EcDsStRequestManagerServer forwards the requests to the <b>EcDsStArchiveServer</b> .

**Table 4.1.14. STMG T CSCI DISTRIBUTION STAGING Process Interface Events  
(3 of 4)**

Event	Event Frequency	Interface	Initiated By	Event Description
Create_Attach	One attach per request	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<i>Process:</i> EcDsDistributionServer <i>Class:</i> DsDdMedia	The <b>EcDsDistributionServer</b> sends requests to the EcDsStRequestManagerServer to attach (gain access) to an existing staging disk area allocated by another process.
Create_Allocate	One allocation per request	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<b><i>Process:</i></b> EcDsScienceDataServer <i>Library:</i> DsGe <i>Class:</i> DsGeESDT  <b><i>Process:</i></b> EcDsDistributionServer <i>Class:</i> DsDdMedia	The <b>EcDsScienceDataServer</b> and <b>EcDsDistributionServer</b> send requests to the EcDsStRequestManagerServer to allocate areas on the local staging disk to store data for distribution.
Claim Ownership	One per attach request	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<i>Process:</i> EcDsDistributionServer <i>Class:</i> DsDdMedia	The <b>EcDsDistributionServer</b> sends requests to the EcDsStRequestManagerServer to claim ownership of (take responsibility for deallocating) an existing staging disk area.
Copy Data	One file copy per request	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<b><i>Process:</i></b> EcDsScienceDataServer <i>Library:</i> DsGe <i>Class:</i> DsGeESDT  <b><i>Process:</i></b> EcDsDistributionServer <i>Class:</i> DsDdGranuleS	The <b>EcDsScienceDataServer</b> and <b>EcDsDistributionServer</b> send requests to the EcDsStRequestManagerServer to copy data within staging disks and between staging disks.

**Table 4.1-14. STMG CSCI DISTRIBUTION STAGING Process Interface Events  
(4 of 4)**

Event	Event Frequency	Interface	Initiated By	Event Description
Link File	One link per file in a request	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsGe <i>Class:</i> DsGeESDT  <i>Process:</i> EcDsDistributionServer <i>Class:</i> DsDdGranule	The <b>EcDsScienceDataServer</b> and <b>EcDsDistributionServer</b> send requests to the EcDsStRequestManagerServer to link files from the read-only cache to a staging disk and from one staging disk to another.
Allocate Disk Space	One allocation per request	<i>Process:</i> EcDsStStagingDiskServer <i>Library:</i> DsStTmServer <i>Class:</i> DsStReceptionist	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStTmClient <i>Class:</i> DsStPatron	The EcDsStRequestManagerServer forwards the requests to the <b>EcDsStStagingDiskServer</b> .
Attach to Disk Space	One attach per request	<i>Process:</i> EcDsStStagingDiskServer <i>Library:</i> DsStTmServer <i>Class:</i> DsStReceptionist	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStTmClient <i>Class:</i> DsStPatron	The EcDsStRequestManagerServer forwards the requests to the <b>EcDsStStagingDiskServer</b> for processing.
Linking File	One link per file in a request	<i>Process:</i> EcDsStStagingDiskServer <i>Library:</i> DsStTmServer <i>Class:</i> DsStReceptionist	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStTmClient <i>Class:</i> DsStPatron	The EcDsStRequestManagerServer forwards the requests to the <b>EcDsStStagingDiskServer</b> for processing.
Destroy_Detach	One detach per request	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsGe <i>Class:</i> DsGeESDT	The <b>EcDsScienceDataServer</b> sends requests to the EcDsStRequestManagerServer to detach (lose access) to an existing staging disk area owned by another process.

Table 4.1-15 provides descriptions of the interface events shown in the STMGT CSCI DISTRIBUTION TRANSFER architecture diagram.

**Table 4.1-15. STMGT CSCI DISTRIBUTION TRANSFER Process Interface Events  
(1 of 6)**

Event	Event Frequency	Interface	Initiated By	Event Description
Request Capacity	Per user request	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<i>Process:</i> EcDsDistributionServer <i>Class:</i> DsDdGranuleS	The <b>EcDsDistributionServer</b> sends requests to the EcDsStRequestManagerServer to get the effective maximum capacity of a media type. This information is used to determine the number of media needed to satisfy a given request.
FTP Pull Distribution	One file per pull request	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<i>Process:</i> EcDsDistributionServer <i>Class:</i> DsDdFtpPullMedia	The <b>EcDsDistributionServer</b> sends requests to the EcDsStRequestManagerServer to move a file to the Pull area.
FTP Push Distribution	One per push request	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<i>Process:</i> EcDsDistributionServer <i>Class:</i> DsDdFtpPushMedia	The <b>EcDsDistributionServer</b> sends requests to the EcDsStRequestManagerServer to distribute a file directly to a user.
Create_Attach	One attach per request	<b><i>Process:</i></b> EcDsStRequestManagerServer <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager  Sybase ASE (COTS)	<i>Process:</i> EcDsDistributionServer <i>Classes:</i> DsDdMedia, DsDsStaging	The <b>EcDsDistributionServer</b> sends requests to the EcDsStRequestManagerServer to attach (i.e., gain access) to an existing staging disk area allocated by another process. The EcDsStRequestManagerServer sends requests to the <b>Sybase ASE</b> to attach to staging disk areas.

**Table 4.1-15. STMG T CSCI DISTRIBUTION TRANSFER Process Interface Events  
(2 of 6)**

Event	Event Frequency	Interface	Initiated By	Event Description
Claim Ownership	One per attach request	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<i>Process:</i> EcDsDistributionServer <i>Class:</i> DsDdMedia	The <b>EcDsDistributionServer</b> sends requests to the EcDsStRequestManagerServer to claim ownership of (i.e., take responsibility for deallocating) an existing staging disk area.
Destroy_Deallocate	One deallocation per request	<b><i>Process:</i></b> EcDsStRequestManagerServer <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager  <b><i>Process:</i></b> EcDsStStagingDiskServer <i>Library:</i> DsStTmServer <i>Class:</i> DsStBaseReal	<i>Process:</i> EcDsDistributionServer <i>Class:</i> DsDdMedia	The <b>EcDsDistributionServer</b> sends requests to the EcDsStRequestManagerServer to deallocate (i.e., lose access to) an existing staging disk area. The EcDsStRequestManagerServer sends requests to the <b>EcDsStStagingDiskServer</b> to deallocate (i.e., lose access to) an existing staging disk area.
Attach to Staging Disk	One per request	Sybase ASE (COTS)	<b><i>Process:</i></b> EcDsStRequestManagerServer <i>Library:</i> DsStCmnDb <i>Class:</i> DsStDBIFTransaction	The EcDsStRequestManagerServer sends requests to the <b>Sybase ASE</b> to attach (i.e., gain access) to an existing staging disk area.
Claiming Ownership	One per attach request	Sybase ASE (COTS)	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStCmnDb <i>Class:</i> DsStDBIFTransaction	The EcDsStRequestManagerServer sends requests to the <b>Sybase ASE</b> to claim ownership of (i.e., take responsibility for deallocating) an existing staging disk area.

**Table 4.1-15. STMGT CSCI DISTRIBUTION TRANSFER Process Interface Events  
(3 of 6)**

<b>Event</b>	<b>Event Frequency</b>	<b>Interface</b>	<b>Initiated By</b>	<b>Event Description</b>
Route Requests	Per external client requests	Sybase ASE (COTS) Database Tables: DsStGenericRequest, DsStArchiveRequest, DsStFtpRequest, DsStMediaRequest, DsStStagingDiskRequest	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStCmnDb <i>Class:</i> DsStDBIFTransaction	All requests submitted by external clients are executed within the <b>Sybase ASE</b> database. Requests that can be fulfilled solely by the database ("trivial requests) are satisfied and the results returned to the client with no additional communications with STMGT servers.
Request for Capacity	One calculation per request	Sybase ASE (COTS)	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStCmnDb <i>Class:</i> DsStDBIFTransaction	The EcDsStRequestManagerServer sends requests to the <b>Sybase ASE</b> to determine the effective maximum capacity of a hard media type for the EcDsSt8mmServer or EcDsStDTFServer. This is used to determine the number of media needed to satisfy a given request.
Attaching to Staging Disk	One per attach request	Sybase ASE (COTS)	<i>Process:</i> EcDsSt8MMServer, EcDsStDTFServer, EcDsStFtpServer <i>Library:</i> DsStCmnDb <i>Class:</i> DsStDBIFTransaction	The <b>EcDsSt8MMServer</b> , <b>EcDsStDTFServer</b> and <b>EcDsStFtpServer</b> send requests to the Sybase ASE to attach (i.e., gain access) to an existing staging disk area.
Detach From Staging Disk	One per request	Sybase ASE (COTS)	<i>Process:</i> EcDsSt8MMServer, EcDsStDTFServer, EcDsStFtpServer <i>Library:</i> DsStCmnDb <i>Class:</i> DsStDBIFTransaction	The <b>EcDsSt8MMServer</b> , <b>EcDsStDTFServer</b> and <b>EcDsStFtpServer</b> send requests to the Sybase ASE to detach (i.e., lose access to) from an existing staging disk area.
Getting Capacity	One calculation per request	Sybase ASE (COTS) Database Tables: DsStMediaServer	Sybase ASE (COTS)	The Sybase ASE obtains the capacity for a particular media type from the Sybase configuration tables.

**Table 4.1-15. STMGT CSCI DISTRIBUTION TRANSFER Process Interface Events  
(4 of 6)**

Event	Event Frequency	Interface	Initiated By	Event Description
Allocate Space	One allocation per request	<i>Process:</i> EcDsStStagingDiskServer <i>Library:</i> DsStTmServer <i>Class:</i> DsStReceptionist	<i>Processes:</i> EcDsSt8MMServer, EcDsStDTFServer <i>Library:</i> DsStTmClient <i>Class:</i> DsStPatron	The EcDsSt8MMServer and EcDsStDTFServer send requests to the <b>EcDsStStagingDiskServer</b> to allocate space on an existing staging disk for data distribution.
Deallocate Space	One deallocation per request	<i>Process:</i> EcDsStStagingDiskServer <i>Library:</i> DsStTmServer <i>Class:</i> DsStReceptionist	<i>Processes:</i> EcDsSt8MMServer, EcDsStDTFServer <i>Library:</i> DsStTmClient <i>Class:</i> DsStPatron	The EcDsSt8MMServer and EcDsStDTFServer send requests to the <b>EcDsStStagingDiskServer</b> to deallocate space on an existing staging disk.
Copy Disk	One copy per request	<i>Process:</i> EcDsStStagingDiskServer <i>Library:</i> DsStTmServer <i>Class:</i> DsStReceptionist	<i>Processes:</i> EcDsSt8MMServer, EcDsStDTFServer <i>Library:</i> DsStTmClient <i>Class:</i> DsStPatron	The EcDsSt8MMServer and EcDsStDTFServer send requests to the <b>EcDsStStagingDiskServer</b> to copy data into a staging disk area or between staging disk areas.
Manage Devices	One per media	Sybase ASE (COTS) [Database Tables: DsStDevice, DsStSlot, DsStStacker]	<i>Processes:</i> EcDsSt8MMServer, EcDsStDTFServer <i>Library:</i> DsStCmnDb <i>Class:</i> DsStDBIFTransaction	The <b>EcDsSt8MMServer</b> and <b>EcDsStDTFServer</b> use database tables obtained via the Sybase ASE to determine if a drive is available to handle the request. The Sybase ASE updates its device, slot, and stacker tables (data stores).
Modify DiskInfo	One per distribution request	Sybase ASE (COTS) [Database Table: DsStStagingDisk, DsStStagingDiskLien, DsStStagingDiskFile]	<i>Process:</i> EcDsStStagingDiskServer <i>Library:</i> DsStCmnDb <i>Class:</i> DsStDBIFTransaction	The <b>EcDsStStagingDiskServer</b> submits a request to the Sybase ASE to update the availability of space on the local disk. The Sybase ASE updates its staging area tables (data stores).

**Table 4.1-15. STMGT CSCI DISTRIBUTION TRANSFER Process Interface Events  
(5 of 6)**

Event	Event Frequency	Interface	Initiated By	Event Description
Modify PullAreaInfo	One per file to insert	Sybase ASE (COTS) [Database Tables: DsStCache, DsStManagedCacheDir, DsStCacheFile, DsStDeleteLogCacheFile, DsStFileLink]	<i>Process:</i> EcDsStCacheManagerServer <i>Library:</i> DsStCmnDb <i>Class:</i> DsStDBIFTransaction	The <b>EcDsStCacheManagerServer</b> submits requests to the Sybase ASE to update the availability of space in the Pull cache upon receiving requests to create new user directories and transfer files (via the Ftp Service) from the EcDsStFtpServer.
MkDir	One per directory creation	<i>Process:</i> EcDsStPullMonitorServer <i>Library:</i> DsStTmServer <i>Class:</i> DsStReceptionist	<i>Process:</i> EcDsStFtpServer <i>Library:</i> DsStTmClient <i>Class:</i> DsStPatron	The EcDsStFtpServer sends requests to the EcDsStPullMonitorServer to create directories in the user pull area to which files are linked and from which the external requester can pull files.
Ftp Into Cache	One file per insert request into the Pull cache	<i>Process:</i> EcDsStPullMonitorServer <i>Library:</i> DsStTmServer <i>Class:</i> DsStReceptionist	<i>Process:</i> EcDsStFtpServer <i>Library:</i> DsStTmClient <i>Class:</i> DsStPatron	The EcDsStFtpServer sends requests to the EcDsStPullMonitorServer to transfer files (via the FTP service) into the Pull cache. In response, the EcDsStPullMonitorServer returns status to indicate whether the file needs to be transferred to the cache or is already resident.
Link File	One link per file in a request	<i>Process:</i> EcDsStPullMonitorServer <i>Library:</i> DsStTmServer <i>Class:</i> DsStReceptionist	<i>Process:</i> EcDsStFtpServer <i>Library:</i> DsStTmClient <i>Class:</i> DsStPatron	The EcDsStFtpServer sends requests to the EcDsStPullMonitorServer to link files from the Pull cache to the user pull area.
Pull Ftp Distribution	One file per pull request	<i>Process:</i> EcDsStFtpServer <i>Library:</i> DsStTmServer <i>Class:</i> DsStReceptionist	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStTmClient <i>Class:</i> DsStPatron	The EcDsStRequestManagerServer forwards the requests to the <b>EcDsStFtpServer</b> for processing.

**Table 4.1-15. STMGT CSCI DISTRIBUTION TRANSFER Process Interface Events  
(6 of 6)**

Event	Event Frequency	Interface	Initiated By	Event Description
Push Ftp Distribution	One per push request	<i>Process:</i> EcDsStFtpServer <i>Library:</i> DsStTmServer <i>Class:</i> DsStReceptionist	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStTmClient <i>Class:</i> DsStPatron	The EcDsStRequestManagerServer forwards the requests to the <b>EcDsStFtpServer</b> for processing.
Deallocate Staging Disk Area	One per attach request	<i>Process:</i> EcDsStStagingDiskServer <i>Library:</i> DsStTmServer <i>Class:</i> DsStReceptionist	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStTmClient <i>Class:</i> DsStPatron	The EcDsStRequestManagerServer forwards the requests (deallocate staging disk area) to the <b>EcDsStStagingDiskServer</b> for processing.
Request Management Services	At system startup or shutdown and for restarts	<i>Processes:</i> EcDsStRequestManagerServer, EcDsStArchiveServer, EcDsStStagingDiskServer, EcDsStCacheManagerServer, EcDsStFtpServer, EcDsSt8MMServer, EcDsStDTFServer	DAAC unique startup scripts	<b>System startup and shutdown</b> - Please refer to the release-related, current version of the Mission Operations Procedures for the ECS Project document (611) and the current ECS Project Training Material document (625), identified in Section 2.2.1 of this document.

Table 4.1-16 provides descriptions of the interface events shown in the STMGT CSCI Registry architecture diagram.

**Table 4.1-16. STMGT CSCI Registry Process Interface Events (1 of 2)**

Event	Event Frequency	Interface	Initiated By	Event Description
Request Communications Support	One service per request	<p><b>Process:</b> EcCsIdNameServer</p> <p><b>Libraries:</b> EcPf, Middleware, FoNs, Folp, oodce</p> <p><b>Classes:</b> EcPfManagedServer, EcPfClient, CCSMdwNameServer, FoNsNameServerProxy, CCSMdwRwNetProxy</p> <p><b>Library (Common):</b> EcUr</p> <p><b>Class:</b> EcUrServerUR</p> <p><b>Library:</b> event</p> <p><b>Class:</b> EcLgErrorMsg</p> <p><b>Process:</b> EcCsRegistry</p> <p><b>Library:</b> EcCsRegistry</p> <p><b>Class:</b> EcRgRegistryServer_C</p>	<p><b>Processes:</b> EcDsStRequestManagerServer, EcDsStCacheManagerServer, EcDsStStagingDiskServer, EcDsSt8MMServer, EcDsStDTFServer, EcDsStFtpServer</p>	<p>The <b>DCCI CSCI</b> provides a library of services available to each SDPS and CSMS CSCI. The CSCI services required to perform specific assignments are requested from the DCCI CSCI. These services include:</p> <ul style="list-style-type: none"> <li>• CCS Middleware Support</li> <li>• Database Connection Services</li> <li>• Name/Address Services</li> <li>• Server Request Framework (SRF)</li> <li>• Error/Event Logging</li> <li>• Fault Handling Services</li> <li>• Mode Information</li> <li>• Query Registry - Retrieving the requested configuration attribute-value pairs from the Configuration Registry</li> </ul>

**Table 4.1-16. STMGT CSCI Registry Process Interface Events (2 of 2)**

Event	Event Frequency	Interface	Initiated By	Event Description
Return Configuration Parameters	One set per request	<i>Processes:</i> EcDsStRequestManagerServer, EcDsStArchiveServer, EcDsStCacheManagerServer, EcDsStStagingDiskServer, EcDsSt8MMServer, EcDsStDTFServer, EcDsStFtpServer <i>Library:</i> EcCsRegistry <i>Class:</i> EcRgRegistryServer_C	<i>Process:</i> EcCsRegistry <i>Library:</i> EcCsRegistry <i>Class:</i> EcRgRegistryServer_C	The EcCsRegistry returns the attribute-value pairs (configuration parameters) to the <b>STMGT processes - EcDsStRequestManagerServer, EcDsStArchiveServer, EcDsStCacheManagerServer, EcDsStStagingDiskServer, EcDsSt8MMServer, EcDsStDTFServer and EcDsStFtpServer</b> - upon request.

#### 4.1.3.6 Storage Management Data Stores

Table 4.1-17 provides descriptions of the individual data stores (entitled collectively “Database”) in the STMGT CSCI architecture diagram. More detailed information on these database tables can be found in the CDRL 311 document on Storage Management (CD-311-625).

**Table 4.1-17. STMGT CSCI Data Stores (1 of 4)**

Data Store	Type	Description
<b>Sybase Device Tables</b>		
DsStDevice	Sybase	The data store (database table) to contain an entry for each peripheral device the STMGT CSCI uses to service requests to ingest or distribute data. Since this data store is a look-up for entries in the Request entity, this data is initialized prior to software installation.
DsStSlot	Sybase	This data store contains an entry for each peripheral stacker device’s slots the EcDsStArchiveServer uses to service ingest or data distribution requests, respectively. Since this data store is a look-up entity for entries in the Request entity, this data is initialized prior to software installation.
DsStStacker	Sybase	This data store contains an entry for each peripheral stacker the STMGT CSCI uses to service ingest or data distribution requests. Since this data store is a look-up entity for entries in the Request entity, this data is initialized prior to software installation.
DsStRequestMedia	Sybase	This data store contains the mappings from requests to the hard media needed for the requests. <b>Note:</b> Not currently used in the system.
DsStMediaSet	Sybase	This data store contains the associations of related media into groups that may be loaded or unloaded en masse.

**Table 4.1-17. STMGT CSCI Data Stores (2 of 4)**

<b>Data Store</b>	<b>Type</b>	<b>Description</b>
DsStDeviceMedia	Sybase	This data store contains the types of hard media available for distribution requests.
<b>Sybase Cache Tables</b>		
DsStCache	Sybase	This data store identifies every instance of a read-only cache or Pull Area. The current design supports multiple read-only caches, but only one Pull Area.
DsStCacheFile	Sybase	This data store contains an entry for each file in a STMGT cache (read-only cache or pull area). An entry is inserted into the entity for each file retrieved from the Archival Management And Storage System (AMASS).
DsStDeleteLogCacheFile	Sybase	This data store contains a historic record of each file the STMGT CSCI deletes from its caches (or the DsStCacheFile table). This entity maintains a history of file usage and cache usage for reporting and analysis purposes. An entry is inserted into the entity via a delete trigger in the DsStCacheFile table.
DsStNotification	Sybase	This data store contains configuration information for Pull Area monitoring purposes.
DsStFileLien	Sybase	This data store contains the names of files that have been staged in read-only cache in preparation for being copied or linked to a staging disk. Liens are removed upon copy and converted to links upon link. Liens expire and are automatically removed if not exercised within a configured number of hours.
DsStFileLink	Sybase	This data store contains the user Pull Area directory.
DsStManagedCacheDir	Sybase	This data store contains an entry for each user directory in the Pull Area. An entry is inserted into the data store every time a new directory is added to the Pull Area.
DsStPending Reservations	Sybase	This data store contains a queue for attempts to reserve space, which cannot be met at the time. The queue is serviced on a First-In/First Out (FIFO) priority order.
DsStPendingDelete	Sybase	This data store is used to record granule files ready to be deleted. Storage Management reads this table and deletes the corresponding information from the database.
<b>Sybase Staging Area Table</b>		
DsStStagingDisk	Sybase	This data store saves information (e.g., staging disk size, owner, disk number, and priority request id) about requests for staging disk services.
DsStStagingDiskLien	Sybase	This data store contains a list of the clients currently attached to staging disks. Staging disks are not removed until all liens are released or expired.
DsStStagingDiskFile	Sybase	This data store contains the file names copied to the staging disk areas. This data store is used to track links between staging disks.

**Table 4.1-17. STMGT CSCI Data Stores (3 of 4)**

Data Store	Type	Description
<b>Sybase Volume Group Tables</b>		
DsStBackup	Sybase	Stores a reference to every file currently being backed-up related to Archive Backup and Restore functionality.
DsStBackupHistory	Sybase	Stores a history of every file successfully backed-up related to Archive Backup and Restore functionality.
DsStVolumeGroup	Sybase	This data store contains 'volume group' information (the section of the ECS Archive being accessed) from configuration files such as the path currently pointed to and a history of paths used to store data of a given ESDT and version.
<b>Sybase Configuration Tables (All Servers Use these Tables)</b>		
DsStConfigParameter	Sybase	<p>This data store contains an entry for information to configure and initialize each server instance supported by Storage Management. The data consists of information currently accessed through configuration files (*.CFG) plus information as it pertains to the status and node of operation for each server. An entry is inserted for each parameter that a server uses.</p> <p>Two types of parameters can be defined within the constructs of the DsStConfigParameter table, startup and run-time. Startup parameters require the associated server be restarted in order for the parameters to be used. Run-time parameters can be changed without restarting the server (i.e., the server periodically queries the configuration table for new values).</p>
DsStServerType	Sybase	This data store contains all types of servers administered and configured by Storage Management and their associated descriptions. Eight types of standard servers are currently pre-populated with the database construction due to no user interface currently existing to administer (e.g., Archive, Cache Manager, 8MM Tape, Staging Disk, DTF, Request Manager, Pull Monitor and FTP Server).
DsStServiceThreadConfig	Sybase	This data store contains the allocation of service threads by priority for each server. For servers that use multiple thread pools, the priority allocation of each thread pool is stored.
DsStStagingDiskServer	Sybase	This data store contains configuration parameters specific to instances of the Staging Disk Server.
DsStFtpServer	Sybase	This data store contains configuration parameters specific to instances of the FTP Server.
DsStArchiveServer	Sybase	This data store contains configuration parameters specific to instances of the Archive Server.
EcDbDatabaseVersions	Sybase	Contains version information about the installed database. Data includes the date of installation, the version number of the database installed, and the latest version number available for the loaded database.

**Table 4.1-17. STMGT CSCI Data Stores (4 of 4)**

<b>Data Store</b>	<b>Type</b>	<b>Description</b>
DsStPreconfiguredDevice	Sybase	This data store contains a list of devices known to the deployed version of the ECS software. This is provided as a convenience to the operator in order to facilitate installation and configuration of new hardware.
<b>Sybase Operator Logging Tables</b>		
DsStErrorAttribute	Sybase	This data store is required for the DsStErrorDetails class. This data store provides a mapping between character mnemonics and numeric error codes. It defines the attributes for each error, and provides adequate characterization for appropriate retry/recovery procedures from the error attributes.
DsStErrorText	Sybase	This data store provides text descriptions and suggested recovery actions for each error code, and presents errors in a meaningful manner.
DsStEventLog	Sybase	This data store contains a history of events and COTS errors encountered by the STMGT CSCI. The STMGT CSCI inserts a new ERROR_LOG entry each time an event occurs or an error is encountered. The Operations staff has the capability to purge this entity periodically based on a date/time value.
<b>Sybase Check-pointing Tables (All Servers use these Tables)</b>		
DsStArchiveRequest	Sybase	Stores all requests for archive services until they are completed.
DsStFile	Sybase	Contains an entry for each file STGMT is currently processing related to a DsStArchiveRequest entry.
DsStFtpRequest	Sybase	Stores information (e.g., pull directory name and parameter list for FTP request) about FTP specific requests.
DsStGenericRequest	Sybase	Stores common information to all STMGT requests (e.g., checkpoint state, request status, and type of operation, and owner name) regardless of type.
DsStCacheManagerRequest	Sybase	Contains information (e.g., unique file name, and original file name and file size for Cache Manager specific requests.
DsStMediaRequest	Sybase	Contains information specific to requests processed by the DTF and 8MM.
DsStCancelledRequest	Sybase	Stores a list of requests, which have been cancelled, with the reason for cancellation.
DsStDependentRequest	Sybase	Tracks dependencies between requests, i.e., where a higher-level request is waiting for a lower-level request to complete.
DsStArchiveFileRequest	Sybase	Contains information specific to Archive Server requests, which operate on a single file, e.g., ArStoreFile and ArRetrieveFile.
DsStStagingDiskRequest	Sybase	Contains information specific to Staging Disk Server requests.

## 4.1.4 Data Server Subsystem Hardware

### 4.1.4.1 Access Control and Management Hardware CI Description

The Access Control and Management HWCI (ACMHW), provides access to the Data Server subsystem for subsystem and direct “push/pull” user access, provides tools and capabilities for system administration, and supports the infrastructure of the Data Server. This HWCI controls logical data server access, maintains sessions, provides sub-setting support, directs service requests to other appropriate Data Server Subsystem configuration items, and supports the control and data flow for electronic distributions. The Access Control and Management hardware (ACMHW) is logically divided into the Administration Stations (AS) and the Access/Process Coordinators (APCs). The number, type, and configuration of ASs and APCs depend on site requirements and the number of data servers supported. Table 4.1.4.1-1 provides descriptions of the ACMHW.

**Table 4.1.4.1-1. Access Control and Management HWCI Descriptions**

Server Name	Class/Type	Description
Administration Stations	OPS Workstation	SUN workstations
Access/Process Coordination	APC Data Server	Two SGI Servers with Multi-processor Capabilities and a SUN Server

Administration Stations (AS) hosts provide access to the Administration Services for one or more data servers. These services provide Data Server Administrators with the capability to modify and monitor the configuration of the data server. The data server configuration includes resource availability, number and location of items, data server schema, data types and archiving strategy. In addition, this set of services includes the capability to perform Archive maintenance functions. The AS are mid-sized workstations executing GUI packages to accommodate the imposed I/O and processing requirements.

The Access/Process Coordinators (APCs) are the interface to the data server services. The APCs support session establishment, management, and control, and are used to access the data server services. Sessions management (from a user perspective) provides a variety of data server resources including results sets, cached compute-on-demand data objects, search contexts, etc. These resources impose a computational load and an I/O load on the APC processors. A greater I/O load is imposed by the APCs functioning as a data throughput mechanism for electronic data distribution and for data manipulation via sub-setting. APC platforms also support ingest, storage, and distribution of the Browse data. The Browse data hardware accommodates the different DAAC sizes. At the smaller DAACs, Browse data resides on a RAID disk, at larger sites, like GSFC, Browse data is stored in on line storage. Each APC consists of four platforms configured in pairs as follows: each pair is an SGI host acting as a server and running a Science Data Server database and a SUN host running the ECS Science Data Server custom code. One pair is primary, while the other is the standby. The APCs provide the computer resources, search engines, and tools to operate on data retrieved from repositories. Algorithms operating on site data can execute on an APC or a computer in the Data Processing Subsystem.

The APC SGI server host accommodates electronic ingest of browse data and data from sources external to the DAAC, including electronic distribution, and manages the requests to the Data Server. APC storage supports functions such as sub-setting, storing user session context, keeping track of user session interactions that can be suspended or resumed, and the Browse collection.

The two APC servers in a standby configuration share a common disk pool. This disk pool is configured as an outboard stack of RAID disk drives dual-ported to the two servers. One of the servers is configured as primary, the other as a standby secondary. The active server maintains the current system configuration files on disk. In some cases, both servers are active with separate primary responsibilities and shared secondary responsibilities. The servers can accommodate degraded mode fail-over capability in the event of a failure. When a failure on a primary APC is detected, the operator initiates a fail-over procedure. During a fail-over, the backup APC server reads the system status files from the shared disk and begins operating as primary.

#### **4.1.4.2 Data Repositories Hardware CI Description**

The Data Repositories (DRs) HWCI (DRPHW) is hardware to store and maintain data permanently. Different technologies are used to instantiate DRs depending on the volume and type of data to be stored, the access patterns of the data, and additional unique requirements imposed on the repository (i.e., data maintenance requirements, backup and restore functions, media management and control, etc.).

DRs are classified as “permanent”, meaning the services to monitor and maintain data integrity for large data holdings are supported by this repository's storage technology. A copy of all data at a site not considered temporary is eventually maintained in a site permanent DR.

The File and Storage Management System (FSMS) host platform is an SGI machine. In DRPHW CIs there are at least two such hosts to serve as a primary and a backup. At the sites with more than two FSMS hosts, one of the hosts serves as a backup to all other hosts and the WKSHW host if any (See Section 4.1.4.3 for the WKSHW Description).

The Data Server's servers and workstations are directly connected to the DAAC FDDI network and High-speed Gig Ethernet fabric.

Table 4.1.4.2-1 provides descriptions for the Data Repository HWCI.

**Table 4.1.4.2-1. Data Repository HWCI Descriptions**

<b>Class/Type</b>	<b>Description</b>
Archive Robotics	STK Powderhorn
Magnetic Tape Drives	STK Redwood
SMP Server Workstation (FSMS Host)	SGI Server with Multi-processor Capabilities

#### 4.1.4.3 Working Storage Hardware CI Description

Working Storage HWCI (part of DRPHW) of the Data Server supplies storage for temporary file and buffer storage within the Data Server architecture. This pool contains the interim processing data. The Working Station HWCI (WKSHW) provides the staging capacity for data acquires and inserts of the interim data.

EDC is the only site that requires interim product data. All interim product data used by the Data Processing Subsystem are staged in the WKSHW for a maximum period of 90 days (most interim products are far more short-lived). Disk storage is supplied for the interim products. Also at EDC, where interim product data accumulation is very significant, archival robotics and tapes are used for this storage as a second tier of WKSHW.

**Table 4.1.4.3-1. Working Storage HWCI Descriptions**

Item Name	Class/Type	Comments
Working Storage Primary Tier	RAID (host attached)	EDC DAAC only
Working Storage Secondary Tier	Tape Robotics	EDC DAAC only

Using a RAID for storage implementation provides fault tolerance of the WKSHW. The RAID provides degraded mode of operations for a single disk failure. Second tier storage RMA is equivalent to the rest of the robotic library storage in the archive repository (See Section 4.1.4.2 for the Data Repository Hardware Description). The WKSHW host is backed up by a standby in the DRPHW configuration.

#### 4.1.4.4 Distribution and Ingest Peripheral Management Hardware CI Description

The Distribution and Ingest hardware (DIPHW) supports the media distribution methods for data dissemination from the system and hard media ingest of data into the system (LP DAAC only). Hard media distribution and ingest is used in an assortment of data recording peripherals. Robotic control is used where applicable to minimize operator involvement.

The distribution and ingest peripheral hardware (LP DAAC only) supply the hard media for inter-site, user data distribution scheduling and management. This HWCI contains media drives, jukeboxes/stackers, server hosts, and disk storage for network distribution.

Staging disks in the Distribution and Ingest configuration items of the DIG serve as a buffer to the data pull process. The buffered data pull optimizes performance of the data retrieval for distribution or data processing/archiving after ingest.

The Distribution hardware includes SGI server controlled recording devices for both hard media data distribution and hard media data ingest.

**Equipment complement:** RAID (host attached), 8-mm tape drives and stackers, 3480/3490 drives, CD recordable, DVD recordable, printers, and optical scanner. LP DAAC has the ASTER Ingest through a Sun server via an attached Sony DTF tape drive.

## 4.2 Ingest Subsystem Overview

The Ingest Subsystem (INS) ingests data into Science Data Processing Segment (SDPS) repositories in accordance with approved ICDs. Data is accepted from a variety of external data providers in a variety of formats predefined within SDPS regarding the expected metadata and metadata characteristics. The INS supports a variety of Ingest requests and preprocesses the data for archiving into the SDPS. The preprocessing depends on the attributes of the ingested data such as data type, data format, and the level to which the ingested data has been processed from raw instrument data.

The data types are formally referred to as Earth Science Data Types (ESDTs). An ESDT is a defined data set associated with a given mission/instrument or identified grouping and is registered in an SDPS ESDT Baseline List. The ESDT is identified with a short name, a long name, a collection description, and information on file type, metadata, formats, and services provided such as sub-setting by a given attribute. An example of an ESDT is AST\_L1A; the short name for the ASTER reconstructed Level 1A data set, unprocessed instrument digital counts with radiometric (LR) and geometric (LG) coefficients attached. ESDTs can also be ancillary data, algorithms, correlative and calibration data.


The INS software processes execute in a specific pattern based on the ESDT being ingested. The processes include a polling ingest process, a media ingest process, and a cross mode ingest process. Ingest processes provide for the receipt of external data, which is archived within the ECS SDPS archival system. Specific ingest process procedures are established to support each unique INS interface and allow the processing interface parameters to be modified as interface and mission requirements evolve. For a given incoming data set corresponding to an ESDT, the INS performs data preprocessing, metadata extraction, and directs the DSS SDSRV CSCI to perform metadata validation.

Data is staged (prepared for transfer) to one of two areas depending on the data level, ESDT, and other data set specific characteristics:

- Level 0 (L0) data received from external data providers and other selected data (EDOS ancillary data) is staged to the INS working storage area. Metadata is extracted and the format is validated in the working storage area. The L0 data is transferred to an archive data repository in the DSS for long-term storage.
- Non-L0 data (such as non-EDOS ancillary data and L1A - L4 data from external facilities) is staged directly to the working storage area in the DSS. Extraction of metadata is performed on the data by the INS software residing in the INS processor hardware. The INS software residing in the INS processor hardware calls the DSS (SDSRV CSCI) to perform metadata validation. The non-L0 data is transferred to a DSS archive data repository for long-term storage.

## Ingest Subsystem Context

Figure 4.2-1 is the INS context diagram. The diagram shows the events sent to the INS from other SDPS or CSMS subsystems and the events the INS sends to other SDPS or CSMS subsystems, the Operations staff, and external providers. Table 4.2-1 provides descriptions of the interface events shown in the Ingest Subsystem context diagram.

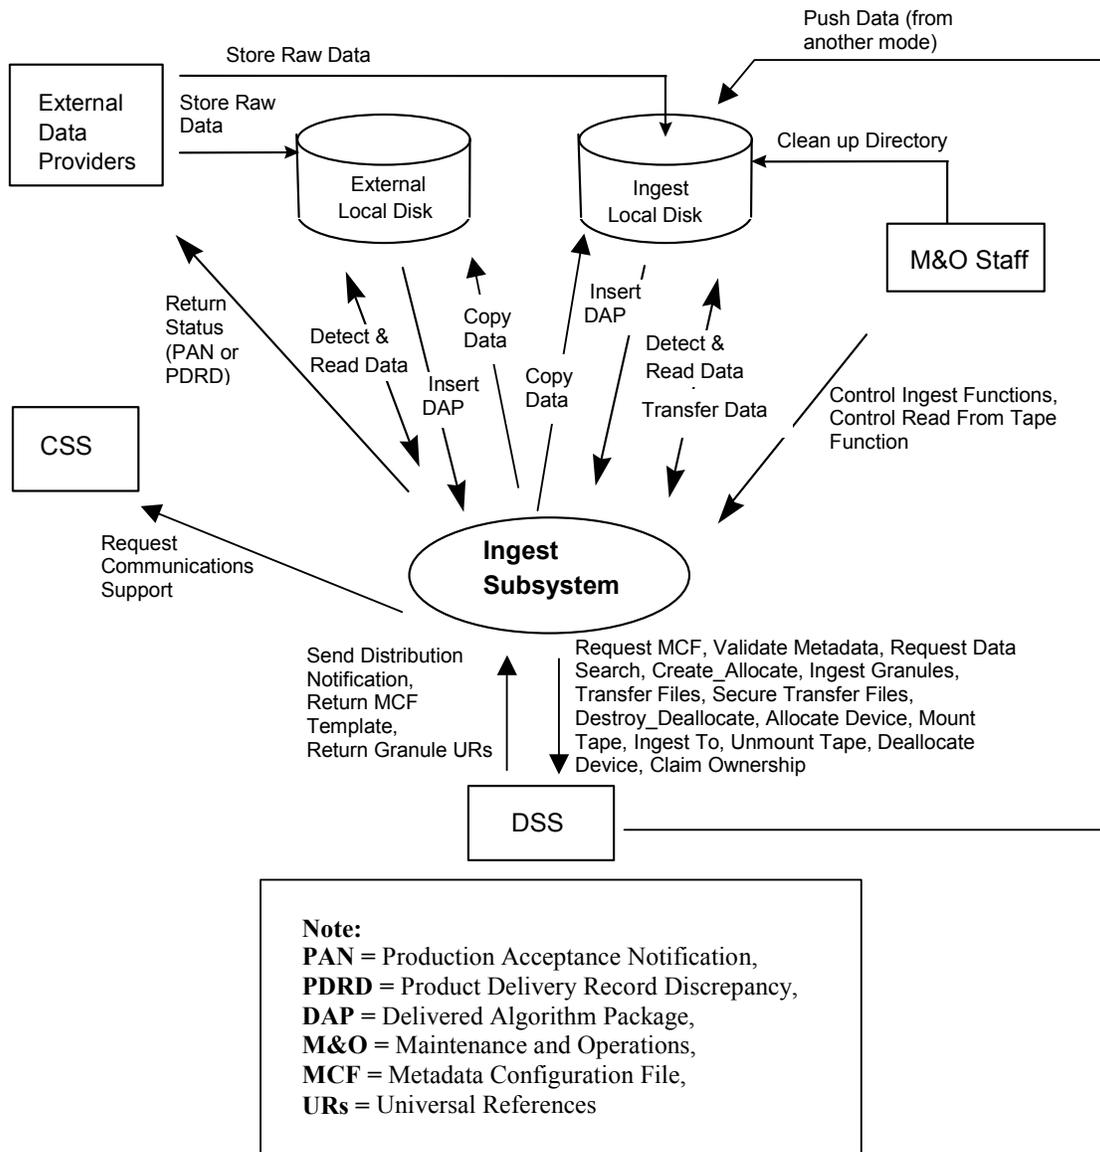

**Figure 4.2-1. Ingest Subsystem Context Diagram**

**Table 4.2-1. Ingest Subsystem Interface Events (1 of 2)**

Event	Interface Event Description
Push Data (from another mode)	The DSS pushes data, via the FTP service, to the <b>Ingest local disk</b> when it is distributing data to be ingested.
Clean up Directory	The <b>Operations staff</b> sends clean up instructions to the Ingest Local Disk for data clean up. Currently, delete and remove Unix commands are executed from the Unix command line to clean up the Ingest local disk.
Control Ingest Functions	The <b>Operations staff</b> controls the Ingest function by monitoring requests, canceling requests and granules, resuming suspended requests and granules, changing database parameters, viewing history, and performing manual media ingest via a GUI.
Control Read From Tape Function	The <b>M&amp;O staff</b> controls the read from tape function by selecting the option on the GUI to read from tape.
Detect & Read Data	The Ingest Subsystem (INS) polls for data files, Delivery Record files, or distribution notification files in an agreed upon location ( <b>External to ECS or Ingest internal Local Disk</b> ). The Data Provider can specify using normal FTP or secure shell to transfer Product Delivery Record and data files.
Transfer Data	The INS retrieves data from the <b>Ingest local disk</b> and stores distribution notification files and PDRs for cross mode ingest on the Ingest local disk.
Insert DAP	Delivered Algorithm Packages (DAPs) are located on a <b>Local Disk</b> (external or internal to a DAAC) and are inserted into the SDPS via the automated polling ingest interface.
Copy Data	The INS copies data from tape to the <b>Ingest external and/or internal local disk</b> .
Request MCF	The INS requests the Metadata Configuration File (MCF) template, from the <b>DSS</b> , for a particular ESDT short name prior to a data insert request.
Validate Metadata	The <b>DSS</b> validates the metadata files that the INS has populated.
Request Data Search	The INS requests a search, by the <b>DSS</b> , for the granule corresponding to a particular ESDT short name and version, which has a particular local granule id.
Create_Allocate	The INS sends requests to the <b>DSS</b> to allocate areas on the local staging disk to store ingested data.
Ingest Granules	The INS sends requests to the <b>DSS</b> to insert a particular file or files into the SDSRV inventory and archive. Inserted data is accompanied by metadata. The metadata is catalogued in the SDSRV inventory as a granule of a particular ESDT short name and version.
Transfer Files	The INS sends requests to the <b>DSS</b> to transfer (copy) data files to a staging disk.
Secure Transfer Files	The INS sends requests to the <b>DSS</b> to secure transfer (scp) data files to a staging disk.
Destroy_Deallocate	The INS sends requests to the <b>DSS</b> to deallocate a staging disk area (to remove an existing staging disk area from usage). Deallocation of staging disks deletes transferred copies of the data after it (the original data) has been archived.
Allocate Device	The INS sends requests to the <b>DSS</b> to allocate peripheral devices for data ingesting.

**Table 4.2-1. Ingest Subsystem Interface Events (2 of 2)**

Event	Interface Event Description
Mount Tape	The INS sends requests to the <b>DSS</b> to load tapes to hardware peripherals for reading the tapes.
Ingest To	The INS sends requests to the <b>DSS</b> to copy files from peripheral resources to staging disk areas.
Unmount Tape	The INS sends requests to the <b>DSS</b> to unload and detach tapes from hardware peripherals after reading or writing to the tapes.
Deallocate Device	The INS sends requests to the <b>DSS</b> to deallocate the previously allocated media resource.
Claim Ownership	The INS sends requests to the <b>DSS</b> to claim ownership of (take responsibility for deallocating) an existing staging disk area.
Send Distribution Notification	The <b>DSS</b> sends a distribution notification, via e-mail, to the INS when data being distributed is to be ingested.
Return MCF Template	The <b>DSS</b> sends the MCF template to populate as part of the GetMCF service call to the INS.
Return Granule URs	The <b>DSS</b> returns the Earth Science Data Type (ESDT) Universal References (URs) for the requested granules from the INS.
Request Communications Support	<p>The <b>CSS</b> provides a library of services available to each SDPS and CSMS CSCI. The CSCI services required to perform specific assignments are requested from the CSS. These services include:</p> <ul style="list-style-type: none"> <li>• CCS Middleware Support</li> <li>• Database Connection Services</li> <li>• File Transfer Services</li> <li>• Network &amp; Distributed File Services</li> <li>• Bulk Data Transfer Services</li> <li>• Name/Address Services</li> <li>• Server Request Framework (SRF)</li> <li>• Universal Reference (UR)</li> <li>• Error/Event Logging</li> <li>• Fault Handling Services</li> <li>• Mode Information</li> <li>• Query Registry - Retrieving the requested configuration attribute-value pairs from the Configuration Registry</li> </ul>
Return Status (PAN or PDRD)	The INS returns the status of a request received from an <b>External Data Provider</b> by transmitting a Production Acceptance Notification (PAN) or a Product Delivery Record Discrepancy (PDRD) to the External Data Provider directly.
Store Raw Data	The raw data (L0) provided from the <b>External Data Provider</b> to the ECS. Some external providers put this data on an external local disk for ECS to pull while others push the data onto a local INS internal disk.
Request Management Services	<b>System startup and shutdown</b> - Please refer to the release-related, current version of the Mission Operations Procedures for the ECS Project document (611) and the current ECS Project Training Material document (625), identified in Section 2.2.1 of this document.

## Ingest Subsystem Structure

The INS is one CSCI and one HWCI. Ingest backup hardware runs in the Test Mode as long as there are no failures. The configuration items are:

- Ingest (INGST) CSCI provides the software capability to acquire data by various methods and transfers the data into the SDPS. These methods include Polling with or without Delivery Record for data placed at predetermined locations, a Media transfer method, which includes reading tapes and a cross mode ingest method. The INGST CSCI also stores and manages request information, and provides for data preprocessing and insertion into the appropriate SDPS storage location.
- Ingest Client HWCI (ICLHW) supports INGST in bringing data into the SDPS from an external interface. This HWCI also includes an Ingest Workstation for execution of the Ingest GUI.

## Use of COTS in the Ingest Subsystem

- Rogue Wave's Tools.h++

The Tools.h++ class libraries provide basic functions and objects. This library and the following Rogue Wave libraries are delivered as static libraries with ECS custom code.

- Rogue Wave's DBTools.h++

The DBTools.h++ class libraries interact with the Sybase ASE. These libraries must be installed with the INS software to interact with Sybase. The INS uses an interface software process control file (PCF) to obtain access to the Sybase ASE.

- Rogue Wave's ToolsPro.h++

Net.h++ is included in the C++ class libraries of this tool to provide an object-oriented interface to Inter-Process Communication (IPC) and network communication services. The Net.h++ framework enables developed code to be portable to multiple operating systems and network services. These libraries must be installed with the INS software to support the interface to other subsystems.

- Integrated Computer Solutions' (ICS) Builder Xcessory (built on X/Motif)

The Builder Xcessory GUI builder tool modifies the displays of Ingest GUIs. The tool also generates the C++ code to produce Ingest GUIs at run time. There is no operational part of the Builder Xcessory needed at run-time.

- Sybase (OpenClient, ASE)

This set of Sybase products provides a relational database to store INS related information and must be installed on the platform where INS software resides.

- CCS Middleware Client

This product provides the communications between INS and other subsystems. CCS Middleware can reside on one or both sides of the interface and must be installed on the platform where the INS resides. Although the CCS Middleware Client is part of the CSS, this COTS product must be installed on the platform where the INS software resides for INS to run in the ECS operational and test environments.

- UNIX Network Services

DNS, NFS, E-mail, FTP, TCP/IP and the other Unix services provided are obtained from the CSS and are described in section 4.8 of this document.

### **Error Handling and processing**

The INGEST Subsystem (INS) uses the class EcUtStatus for general error reporting. It is used mostly as a return value for functions and allows detailed error codes to be passed back up function stacks.

DsShError is a Science Data Server specific class used by INGEST for printing the line number in the code where an error occurred.

The INGEST CSCI uses two main mechanisms for error handling.

1. Return Values

Functions can return an EcUtStatus object, which can be used to indicate a general success/failure status, as well as more detailed information on the exact reason for the failure. This is the most widely used mechanism within INGEST and in general, these errors get propagated back up to the top-level functions with ALOG error messages being generated along the way.

2. Debug Messages

The Ingest code uses the PF\_STATUS, PF\_VERBOSE and PF\_DEBUG macros to log messages to the debug logs. These macros are part of the EcPfGenProcess class.

For writing messages to the debug log, the following macros are used:

PF\_STATUS writes a message at a "log level" of 1 to the debug log. For example,

```
PF_STATUS { cerr << "InDataPreprocessTask::Preprocess successful. ";  
    cerr << "RequestID="<< myRequestID<< " GranuleID="<<myGranuleID <<"  
    CollectionName="<<myDataType<< endl; }
```

PF\_VERBOSE writes a message at a "log level" of 2 to the debug log. For example,

```
PF_VERBOSE { cerr << "InFDDorbitMetadata::Preprocess() " << endl;  
    cerr << "Byte-ordered FDD Orbit Metadata preprocessing successful. ";
```

```

cerr << "RequestID=" << myRequestID << ", ";
cerr << "GranuleID=" << myGranuleID << ", ";
cerr << "CollectionName=" << myDataType.data() << endl;
cerr << "myInputFile: " << myInputFile.data() << endl; }

```

PF\_DEBUG writes a message at a "log level" of 3 to the debug log. For example,

```

PF_DEBUG { cerr << __FILE__ << ":" << __LINE__ << endl;
cerr << "InDataPreprocessTask::PreprocessSceneMetadata ";
cerr << "browseFileName = " << browseFileName << endl;
cerr << "DataType = " << myDataType ;
cerr << "VersionID = " << myVersionID;
cerr << "RequestID=" << myRequestID << " GranuleID=" << myGranuleID << endl; }

```

In addition, INGST generates the following special messages: PDRD and PAN.

### 3. Product Delivery Record Discrepancy (PDRD)/Data Availability Acknowledgement (DAA)

When there is a problem with a Product Delivery Record (PDR) (or Data Availability Notice (DAN), INGST generates a PDRD or DAA message. The message can be sent via e-mail and/or transferred (via FTP) if so configured. The code to generate these messages is in the InMsg library.

### 4. Production Acceptance Notification (PAN)/Data Delivery Notice (DDN) messages

When an INGST request has completed, INGST generates a PAN or DDN message. The message can be sent via e-mail and/or transferred (via FTP) if so configured. The code to generate these messages is in the InMsg library.

## 4.2.1 INGST Computer Software Configuration Item Description

### 4.2.1.1 INGST Functional Overview

The INGST CSCI supports a variety of interfaces to external systems. The application-level protocol set up for data transfer is potentially different for each of the external interfaces. As a result, a separate ingest software application is required to facilitate data transfer for each interface. To minimize the software development effort and make it easier to accommodate interfaces to new external systems, data ingest from external systems is categorized, based on common characteristics and ingest processes.

### **1) Automated Polling Ingest Interface**

- Polling with Delivery Record -- The SDPS periodically checks an agreed-upon network location for a Delivery Record file. The Delivery Record describes the location of the available data. The data location could be on a working storage device within SDPS, where an external data provider has previously transferred the data.
- Polling without Delivery Record -- The SDPS periodically checks an agreed-upon network location for available data. All data in the location make up a collection of ingest data of one specific ESDT, with one file per data granule.

### **2) Manual Media Ingest Interface (via a GUI)**

Manual data transfer mechanisms -- data can be transferred from physical media. Physical Media Ingest enables authorized institutions or science users to provide data on hard media. The hard media must contain information identical to the Delivery Records described above, in a standard file format, or the data provider must separately provide Delivery Records to a specified SDPS location in the standard file format. Hard media data transfer involves data transfer from one of several ingest peripheral types found at a DAAC.


### **3) Cross Mode Ingest Interface**

The INGEST CSCI receives a distribution notice, via e-mail, of data files transferred, via the FTP service. The distribution notification is used to create a Delivery Record File (describes the location of the available data). The Delivery Record file is put in an agreed-upon network location. The polling with Delivery Record process checks the location for the Delivery Record files.


The INGEST CSCI includes the processes for ingesting data as described and provides a process for managing requests, and for inserting granule data into the SDPS.

#### **4.2.1.2 INGEST Context**

Figure 4.2-2 is the INGEST CSCI context diagrams. The diagrams show the events sent to the INGEST CSCI and the events the INGEST CSCI sends to other CSCIs. Table 4.2-2 provides descriptions of the interface events shown in the INGEST CSCI context diagrams.

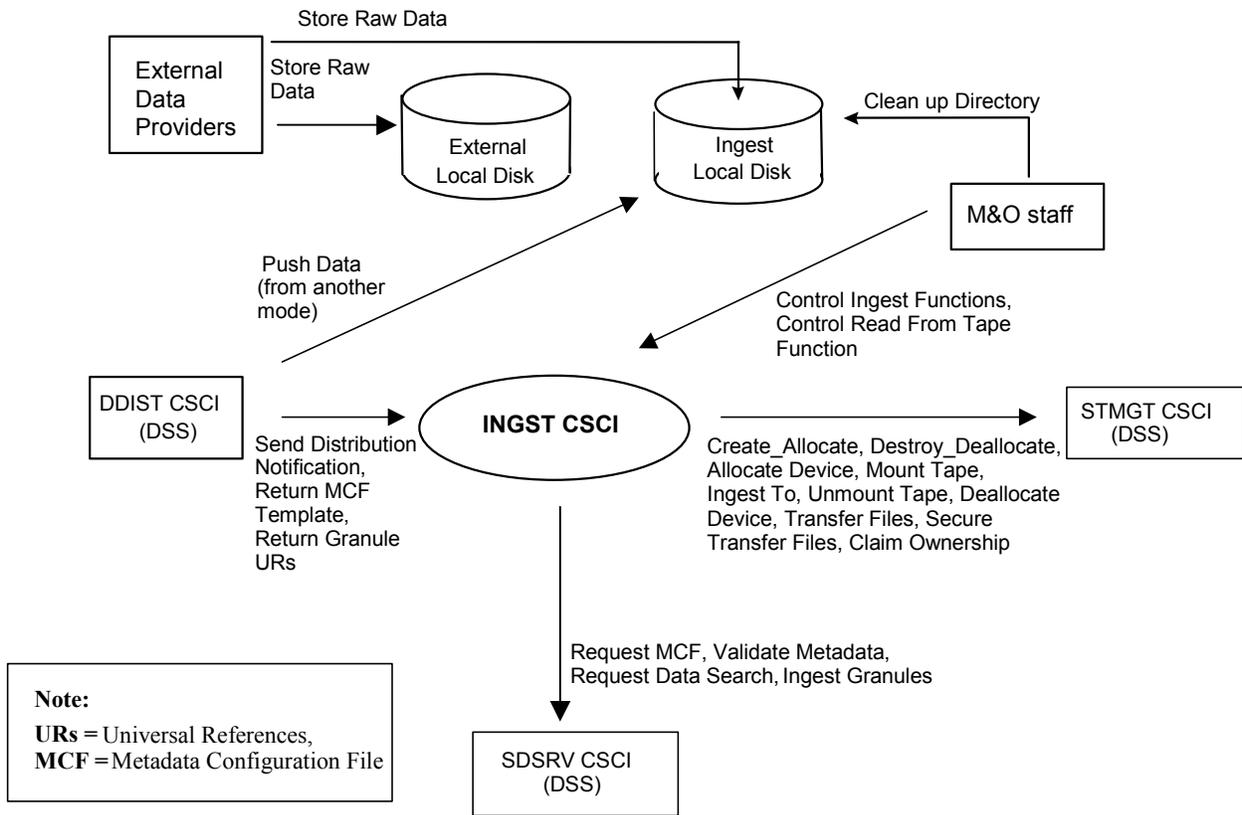

**Figure 4.2-2. INGST CSCI Context Diagram**

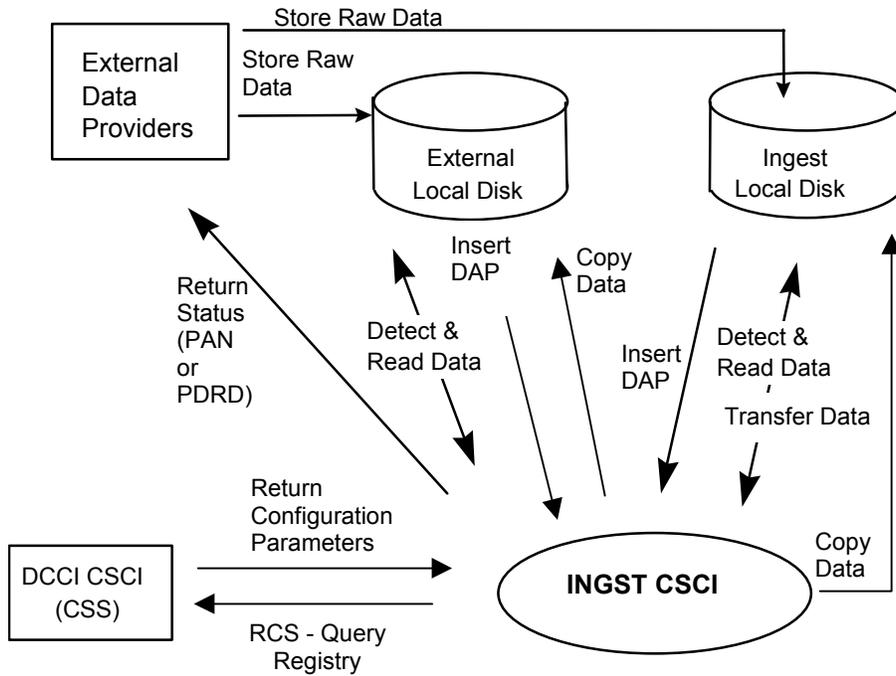

**Note:**  
**DAP** = Delivered Algorithm Package,  
**RCS** = Request Communications Support,  
**URs** = Universal References,  
**MCF** = Metadata Configuration File,  
**PAN** = Production Acceptance Notification,  
**PDRD** = Product Delivery Record Discrepancy

**Figure 4.2-2. INGST CSCI Context Diagram (cont.)**

**Table 4.2-2. INGST CSCI Interface Events (1 of 3)**

Event	Interface Event Description
Clean up Directory	The <b>M&amp;O staff</b> sends clean up instructions to the Ingest local disk for data clean up. Currently, delete and remove Unix commands are executed from the Unix command line to clean up the Ingest local disk.
Control Ingest Functions	The <b>M&amp;O staff</b> control the Ingest function by monitoring requests, canceling requests and granules, resuming suspended requests and granules, changing database parameters, viewing history, and performing manual media ingest via a GUI.
Control Read From Tape Function	The <b>M&amp;O staff</b> controls the read from tape function by selecting the option on the GUI to read from tape.
Create_Allocate	The INGST CSCI sends requests to the <b>STMGT CSCI</b> to allocate areas on the local staging disk to store ingested data.
Destroy_Deallocate	The INGST CSCI sends requests to the <b>STMGT CSCI</b> to deallocate a staging disk area (to remove an existing staging disk area from usage). Deallocation of staging disks deletes transferred copies of the data after it (the original data) has been archived.
Allocate Device	The INGST CSCI sends requests to the <b>STMGT CSCI</b> to allocate peripheral devices for data ingesting.
Mount Tape	The INGST CSCI sends requests to the <b>STMGT CSCI</b> to load tapes to hardware peripherals for reading the tapes.
Ingest To	The INGST CSCI sends requests to the <b>STMGT CSCI</b> to copy files from peripheral resources to staging disk areas.
Unmount Tape	The INGST CSCI sends requests to the <b>STMGT CSCI</b> to unload and detach tapes from hardware peripherals after reading or writing to the tapes.
Deallocate Device	The INGST CSCI sends requests to the <b>STMGT CSCI</b> to deallocate the previously allocated media resource.
Transfer Files	The INGST CSCI sends requests to the <b>STMGT CSCI</b> to transfer (copy) data files into the STMGT CSCI staging disks.
Secure Transfer Files	The INGST CSCI sends requests to the <b>STMGT CSCI</b> to secure transfer (scp) data files into the STMGT CSCI staging disks.
Claim Ownership	The INGST CSCI sends requests to the <b>STMGT CSCI</b> to claim ownership of (take responsibility for deallocating) an existing staging disk area.
Request MCF	The INGST CSCI requests the Metadata Configuration File (MCF) template, from the <b>SDSRV CSCI</b> , for a particular ESDT short name prior to a data insert request.
Validate Metadata	The INGST CSCI populates the metadata files and sends them to the <b>SDSRV CSCI</b> for validation.
Request Data Search	The INGST CSCI requests a search, by the <b>SDSRV CSCI</b> , for the granule corresponding to a particular ESDT short name and version, which has a particular local granule id.
Ingest Granules	The INGST CSCI sends requests to the <b>SDSRV CSCI</b> to insert a particular file or files into the archive. Inserted data is accompanied by metadata. The metadata is catalogued in the SDSRV inventory as a granule of a particular ESDT short name and version.

**Table 4.2-2. INGST CSCI Interface Events (2 of 3)**

Event	Interface Event Description
Send Distribution Notification	The INGST CSCI receives distribution notification, via e-mail, from the <b>DDIST CSCI</b> when data being distributed is to be ingested.
Return MCF Template	The INGST CSCI receives the MCF template to populate as part of the GetMCF service call to the <b>SDSRV CSCI</b> .
Return Granule URs	The INGST CSCI receive Earth Science Data Type (ESDT) Universal References (URs) for the granules from the <b>SDSRV CSCI</b> .
Push Data (from another mode)	The DDIST CSCI pushes data, via the FTP service, to the <b>Ingest local disk</b> when it is distributing data to be ingested.
Store Raw Data	The raw data (L0) is provided from the <b>External Data Provider</b> to the SDPS. Some External Data Providers put this data on an external local disk for SDPS to pull while others push the data onto a local INGST CSCI internal disk.
Insert DAP	Delivered Algorithm Packages (DAPs) are located on a <b>local disk (external or internal to a DAAC)</b> and are inserted into the SDPS via the automated polling Ingest interface.
Copy Data	The INGST CSCI copies data from tape to the <b>Ingest external and/or internal local disk</b> .
Detect & Read Data	The INGST CSCI polls for data files, Delivery Record files, or distribution notification files in an agreed upon location ( <b>External to ECS or Ingest internal local disk</b> ). The Data Provider can specify using normal FTP or secure shell to transfer the Product Delivery Record (PDR) and data files.
Transfer Data	The INGST CSCI retrieves data from the <b>Ingest local disk</b> and stores distribution notification files and PDRs for cross mode ingest on the Ingest local disk.
Request Communications Support	<p>The <b>DCCI CSCI</b> provides a library of services available to each SDPS and CSMS CSCI. The CSCI services required to perform specific assignments are requested from the DCCI CSCI. These services include:</p> <ul style="list-style-type: none"> <li>• CCS Middleware Support</li> <li>• Database Connection Services</li> <li>• File Transfer Services</li> <li>• Network &amp; Distributed File Services</li> <li>• Bulk Data Transfer Services</li> <li>• Name/Address Services</li> <li>• Server Request Framework (SRF)</li> <li>• Universal Reference (UR)</li> <li>• Error/Event Logging</li> <li>• Fault Handling Services</li> <li>• Mode Information</li> <li>• Query Registry - Retrieving the requested configuration attribute-value pairs from the Configuration Registry</li> </ul>
Return Configuration Parameters	The <b>DCCI CSCI</b> returns the attribute-value pairs (configuration parameters) to the INGST CSCI.
Return Status (PAN or PDRD)	The INGST CSCI returns the status of a request received from an <b>External Data Provider</b> by transmitting a Product Acceptance Notification (PAN) or a Product Delivery Record Discrepancy (PDRD) to the External Data Provider directly.

**Table 4.2-2. INGST CSCI Interface Events (3 of 3)**

Event	Interface Event Description
Store Raw Data	The raw data (L0) is provided from the <b>External Data Provider</b> to the SDPS. Some External Data Providers put this data on an external local disk for SDPS to pull while others push the data onto a local INGST CSCI internal disk.
Request Management Services	<b>System startup and shutdown</b> - Please refer to the release-related, current version of the Mission Operations Procedures for the ECS Project document (611) and the current ECS Project Training Material document (625), identified in Section 2.2.1 of this document.


### 4.2.1.3 INGST Architecture

The Polling Ingest Interface (EcInPolling) polls accessible file system locations to detect data to be ingested. This process submits a Product Delivery Record (PDR) or the information for INGST to create a PDR. The Media Ingest Interface (EcInGUI) enables authorized science users or institutions to submit a PDR and the data to be ingested via physical media. The Cross-Mode Ingest Interface (EcInEmailGWServer) receives distribution notifications, via e-mail, and stores them as files in a location, which is polled. This process detects the notification files and creates Delivery Record files, which are put in a polling directory and detected by the Polling Ingest Interface.

The Polling Ingest Interface and the Media Ingest all submit ingest requests (containing PDRs) to the Ingest Request Manager (EcInReqMgr) and the EcInReqMgr submits data granule requests to the Ingest Granule Server (EcInGran). The EcInGran manages subsequent request processing. The EcInGran invokes a Data Transfer task to transfer data from external locations. The EcInGran also invokes a data pre-processing task to preprocess ingested data (e.g., process metadata and validate metadata parameters) and invokes the Data Server Insertion Task to insert data into the Data Server.

Figure 4.2-3 is the INGST CSCI architecture diagram. The diagram shows the events sent to the INGST CSCI processes and the events the INGST CSCI processes send to other processes.

**Note: System startup and shutdown** - Please refer to the release-related, current version of the Mission Operations Procedures for the ECS Project document (611) and the current ECS Project Training Material document (625), identified in Section 2.2.1 of this document.

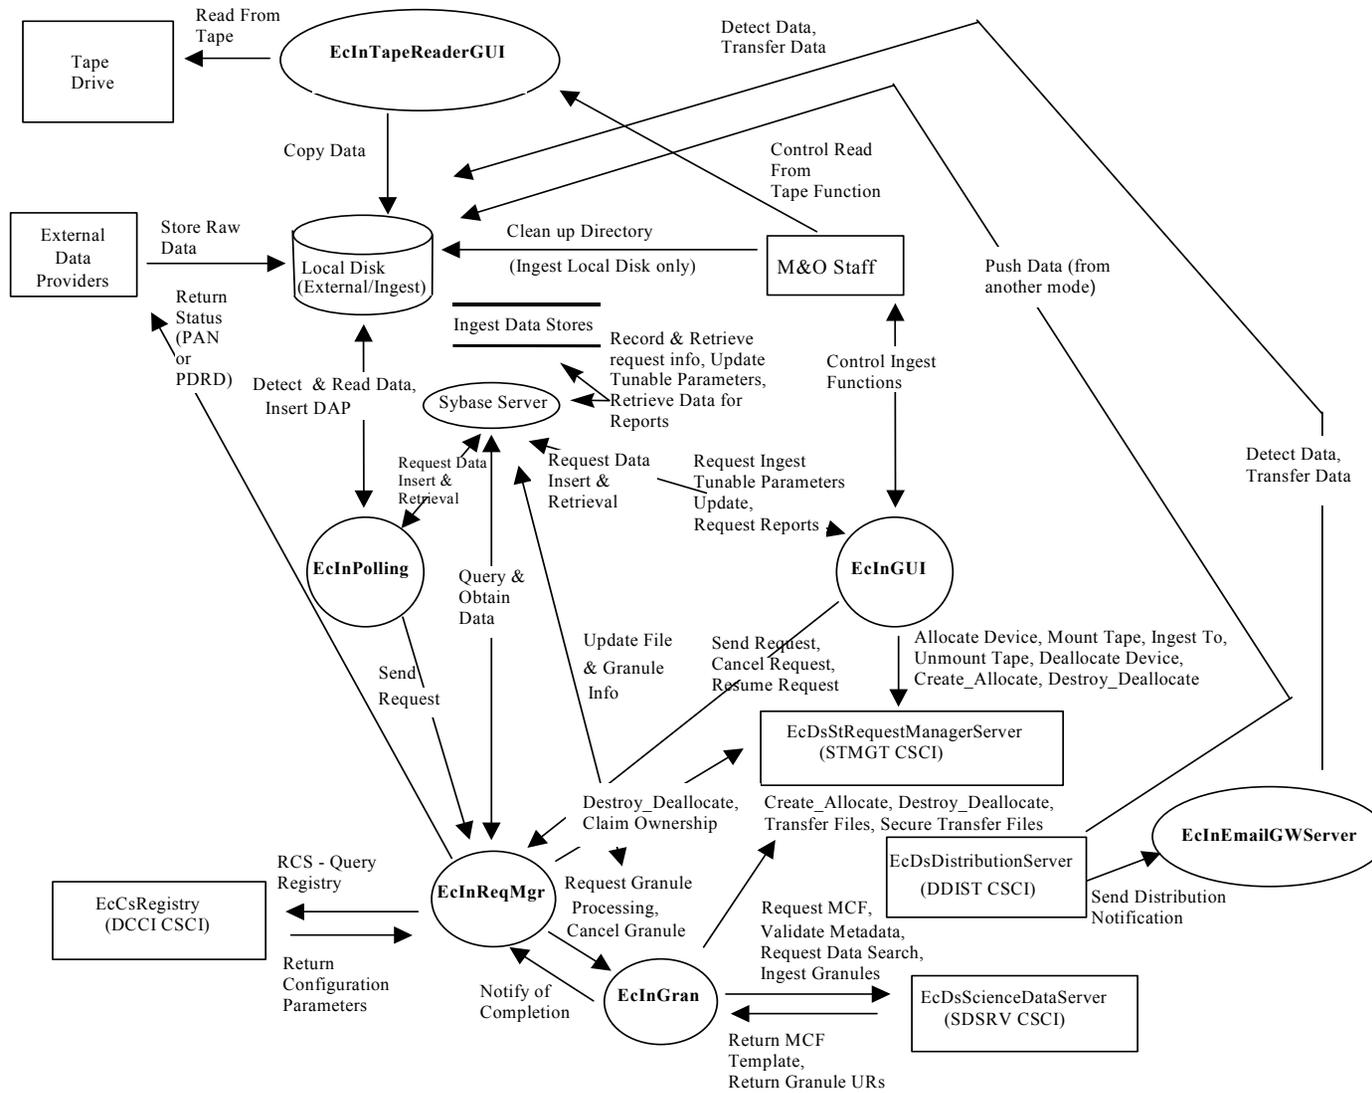

**Figure 4.2-3. INGST CSCI Architecture Diagram INGST Process Descriptions**

#### 4.2.1.4 INGST Process Descriptions

Table 4.2-3 provides the descriptions of the processes shown in the INGST CSCI architecture diagram.

**Table 4.2-3. INGST CSCI Processes (1 of 2)**

Process	Type	Source	Functionality
EclnPolling	Client	Developed	<ul style="list-style-type: none"> <li>Creates the appropriate polling request</li> <li>Detects new files of interest at tunable periods of time in either external or local disk locations (by checking an agreed upon network location for available data) and can provide secure file transfer if data provider indicates secure file transfer by setting TransferFlag to 2 or 3</li> <li>Creates a unique identifier for the request</li> <li>Submits requests</li> <li>Reports the status of the ongoing requests</li> </ul>
EclnGUI	GUI	Developed	<p>Provides Maintenance and Operations (M&amp;O) personnel the capability, via GUI Interface,</p> <ul style="list-style-type: none"> <li>To perform physical media ingest (to ingest data from DTF media)</li> <li>To monitor the ingest history log, to monitor the status of ongoing ingest requests, to cancel ingest requests and granules, and to resume suspended ingest requests and granules</li> <li>To modify ingest configuration parameters</li> </ul>
EclnReqMgr	Server	Developed	<ul style="list-style-type: none"> <li>Manages the ingest request traffic and the processing of the ingest requests, and</li> <li>Provides the capability to process multiple ingest requests concurrently by placing the request in a queue</li> <li>In the event of a failure, the EclnReqMgr process restores on-going requests from the Ingest database</li> </ul>
EclnEmailGWServer	Server	Developed	<ul style="list-style-type: none"> <li>Receives e-mail distribution notification messages</li> <li>Stores e-mail messages into files</li> <li>Detects new files of interest at a regular time interval, which can be configured, on a local disk</li> <li>Creates a polling request and puts it on a local disk location</li> </ul>
EclnTapeReaderGUI	GUI	Developed	<ul style="list-style-type: none"> <li>Reads data from physical media</li> <li>Generates PDR(s)</li> <li>Stores PDR(s) and data files in the PDR and data directories as specified in the corresponding configuration file</li> </ul>

**Table 4.2-3. INGST CSCI Processes (2 of 2)**

Process	Type	Source	Functionality
EclnGran	Server	Developed	<p>Provides services to perform the required data preprocessing and the subsequent data insertion into the appropriate Data Server. The preprocessing of data consists of:</p> <ul style="list-style-type: none"> <li>• Converting the data (if needed)</li> <li>• Extracting the metadata into the standard SDPS metadata format (if needed)</li> <li>• Performing required metadata existence and parameter range checks</li> <li>• Updating the metadata with ingest specific metadata (e.g., start and stop date/time for ingest)</li> </ul> <p>EclnGran coordinates the ingest granule processing including:</p> <ul style="list-style-type: none"> <li>• Performing data preprocessing</li> <li>• Sending an insertion request to the appropriate Data Server</li> <li>• Updating the granule state</li> <li>• Transferring data files into Ingest</li> <li>• Building file lists</li> <li>• Grouping files with a valid ESDT</li> </ul>
Sybase	Server	COTS	<p>Stores and provides access to the INS internal data. In particular, the database stores the Ingest operations databases -- Ingest History Logs and the Ingest request checkpoint state, and template information. See Section 4.2.1.6 INGST Data Stores.</p>

#### 4.2.1.5 INGST Process Interface Descriptions

Table 4.2-4 provides descriptions of the interface events shown in the INGST CSCI architecture diagram.

**Table 4.2-4. INGST CSCI Process Interface Events (1 of 10)**

Event	Event Frequency	Interface	Initiated By	Event Description
Clean up Directory (Ingest local disk only)	One per Unix command to delete or remove	Directories on Ingest Local Disk	M&O Staff-/Unix command	The <b>M&amp;O Staff</b> send clean up instructions to the Ingest Local Disk for data clean up. The Unix commands for delete and remove are executed from the Unix command line to clean up the Ingest Local Disk.
Detect Data	One per poll from EclnEmailGW Server	Directory on local disk	<i>Process:</i> EclnEmailGWServer <i>Class:</i> InEmailGWServer	The <b>EclnEmailGWServer</b> polls for notification files in an agreed upon location (on the Ingest Local Disk).

**Table 4.2-4. INGST CSCI Process Interface Events (2 of 10)**

<b>Event</b>	<b>Event Frequency</b>	<b>Interface</b>	<b>Initiated By</b>	<b>Event Description</b>
Transfer Data	Upon detection	Ingest Local Disk	<i>Process:</i> EclnEmailGWServer <i>Class:</i> InEmailGWServer	The <b>EclnEmailGWServer</b> sends distribution notification files and Delivery Record files to an agreed upon location (on the Ingest local disk).
Control Read From Tape Function	One per tape reader operation	<i>Process:</i> EclnTapeReaderGUI	M&O staff	The M&O staff controls the read from tape function by selecting the option on the GUI to read from tape.
Push Data (from another mode)	One per distribution	Ingest Local Disk	<i>Process:</i> EcDsDistributionServer <i>Class:</i> DsDdGranuleS	The <b>EcDsDistributionServer</b> pushes data, via the FTP Service, to the Ingest Local Disk when it is distributing data to be ingested.
Control Ingest Functions	One per Ingest Operation	<i>Process:</i> EclnGUI <i>Library:</i> InGuiUt <i>Classes:</i> InRequestControllerRPUtil, InMediaIngestRPUtil, InHistoryLogRPUtil, InOperatorToolsRPUtil	M&O staff	The <b>M&amp;O staff</b> control the Ingest function by monitoring requests, canceling ingest requests and granules, resuming suspended ingest requests and granules, changing database parameters, viewing history, and performing manual media ingest via a GUI.
Record & Retrieve Request Info	One per request	Ingest Data Stores (database)	Sybase ASE (COTS)	Requests from the <b>EclnGUI</b> and <b>EclnPolling</b> processes are recorded into the Ingest database for reference and are a source for restarts and re-initializations of outstanding requests.
Update Tunable Parameters	One per update of stored parameters	Sybase ASE (COTS)	<i>Process:</i> EclnGUI <i>Library:</i> InGuiUt <i>Class:</i> InOperatorToolsRPUtil	The EclnGUI sends requests to the <b>Sybase ASE</b> to update the stored parameters in the Ingest database affecting the functions of the EclnPolling, EclnReqMgr, and EclnGran processes.

**Table 4.2-4. INGST CSCI Process Interface Events (3 of 10)**

<b>Event</b>	<b>Event Frequency</b>	<b>Interface</b>	<b>Initiated By</b>	<b>Event Description</b>
Retrieve Data for Reports	One per data request	Sybase ASE (COTS)	<i>Process:</i> EclnGUI <i>Library:</i> InGuiUt <i>Class:</i> InHistoryLogRPUtil	The EclnGUI obtains data from the Ingest database via the <b>Sybase ASE</b> to generate reports.
Request Data Insert & Retrieval	One per request	Sybase ASE (COTS)	Operations Staff <i>Processes:</i> EclnGUI, EclnPolling <i>Library:</i> InDBaccUt <i>Classes:</i> InRequestProcessData, InRequestProcessHeader, InExternalDataProviderInfo, InNextAvailableID, InSystemParameters, InCurrentDataTypeMap, InDataTypeTemplate, InEDPAddressMap, InFileTypeTemplate, InMediaType, InRequestSummaryData, InRequestSummaryHeader, InValDataGranuleState, InValRequestState	Requests from the EclnGUI and EclnPolling processes are recorded into the Ingest database, via the <b>Sybase ASE</b> , for reference and are a source for restarts and re-initializations of outstanding requests.
Request Ingest Tunable Parameters Update	One per update of stored parameters	Sybase ASE (COTS)	<i>Process:</i> EclnGUI <i>Library:</i> InGuiUt <i>Class:</i> InOperatorToolsRPUtil	The EclnGUI sends requests to the <b>Sybase ASE</b> to update the stored parameters affecting the functions of the EclnPolling, EclnReqMgr, and EclnGran processes.
Request Reports	One per data request	Sybase ASE (COTS)	<i>Process:</i> EclnGUI <i>Library:</i> InGuiUt <i>Class:</i> InHistoryLogRPUtil	The EclnGUI obtains data from the Ingest database to generate reports via the <b>Sybase ASE</b> .

**Table 4.2-4. INGST CSCI Process Interface Events (4 of 10)**

<b>Event</b>	<b>Event Frequency</b>	<b>Interface</b>	<b>Initiated By</b>	<b>Event Description</b>
Allocate Device	One allocation per request	<i>Process:</i> EcDsStRequestManager Server <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<i>Process:</i> EcInGUI <i>Library:</i> InGuiUt <i>Class:</i> InMediaIngestRPUtil	The EcInGUI sends requests to the <b>EcDsStRequestManagerServer</b> to allocate peripheral devices for data ingesting.
Mount Tape	One per physical tape	<i>Process:</i> EcDsStRequestManager Server <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<i>Process:</i> EcInGUI <i>Library:</i> InGuiUt <i>Class:</i> InMediaIngestRPUtil	The EcInGUI process sends requests to the <b>EcDsStRequestManagerServer</b> to load tapes to hardware peripherals for reading the tapes.
Ingest To	One data copy from peripheral device(s) per request	<i>Process:</i> EcDsStRequestManager Server <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<i>Process:</i> EcInGUI <i>Library:</i> InGuiUt <i>Class:</i> InMediaIngestRPUtil	The EcInGUI sends requests to the <b>EcDsStRequestManagerServer</b> to copy files from peripheral resources to staging disk areas.
Unmount Tape	One per physical tape	<i>Process:</i> EcDsStRequestManager Server <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<i>Process:</i> EcInGUI <i>Library:</i> InGuiUt <i>Class:</i> InMediaIngestRPUtil	The EcInGUI process sends requests to the <b>EcDsStRequestManagerServer</b> to unload and detach tapes from hardware peripherals after reading or writing to the tapes.
Deallocate Device	One deallocation per request	<i>Process:</i> EcDsStRequestManager Server <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<i>Process:</i> EcInGUI <i>Library:</i> InGuiUt <i>Class:</i> InMediaIngestRPUtil	The EcInGUI sends requests to the <b>EcDsStRequestManagerServer</b> to deallocate the previously allocated media resource.

**Table 4.2-4. INGST CSCI Process Interface Events (5 of 10)**

Event	Event Frequency	Interface	Initiated By	Event Description
Create_Allocate	One allocation per request	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<i>Process:</i> EclnGUI <i>Library:</i> InResource <i>Class:</i> InResourceIF  <i>Process:</i> EclnGran <i>Library:</i> InGranResource <i>Class:</i> InGranResourceIF	The EclnGUI and EclnGran processes send requests to the <b>EcDsStRequestManagerServer</b> to allocate areas on the local staging disk to store ingested data.
Destroy_Deallocate	One deallocation per request	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<i>Process:</i> EclnGran <i>Library:</i> InGranResource <i>Class:</i> InGranResourceIF  <i>Processes:</i> EclnGUI, EclnReqMgr <i>Library:</i> InResource <i>Class:</i> InResourceIF	The EclnGran, EclnGUI, and EclnReqMgr processes send requests to the <b>EcDsStRequestManagerServer</b> to deallocate a staging disk area (to remove an existing staging disk area from usage).
Claim Ownership	One per staging disk area	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<i>Process:</i> EclnReqMgr <i>Library:</i> InResource <i>Class:</i> InResourceIF	The EclnReqMgr sends requests to the <b>EcDsStRequestManagerServer</b> to claim ownership of (take responsibility for deallocating) an existing staging disk area.

**Table 4.2-4. INGST CSCI Process Interface Events (6 of 10)**

Event	Event Frequency	Interface	Initiated By	Event Description
Send Request	One per request to Request Manager	<i>Process:</i> EclnReqMgr <i>Class:</i> InRequestManager	<i>Processes:</i> EclnPolling, EclnGUI <i>Library:</i> InGuiUt <i>Classes:</i> InPollingIngestSession, InMediaIngestRPUtil	Processing requests from one of the two ingest processes ( <b>EclnPolling</b> and <b>EclnGUI</b> ) are sent to the EclnReqMgr.
Cancel Request	One per Ingest Request/Granule	<i>Process:</i> EclnReqMgr <i>Class:</i> InRequestManager	<i>Process:</i> EclnGUI <i>Library:</i> InGuiUt <i>Class:</i> InRequestControllerRPUtil	The <b>EclnGUI</b> is the interface to the EclnReqMgr process to cancel a request or one of its granules.
Resume Request	One per suspended Ingest Request/Granule	<i>Process:</i> EclnReqMgr <i>Class:</i> InRequestManager	<i>Process:</i> EclnGUI <i>Library:</i> InGuiUt <i>Class:</i> InRequestControllerRPUtil	The <b>EclnGUI</b> is the interface to the EclnReqMgr process to resume a suspended request or one of its granules.
Update File & Granule Info	One per file or granule update	Sybase ASE (COTS)	<i>Process:</i> EclnGran <i>Library:</i> InDBaccUt <i>Classes:</i> InRequestProcessData, InRequestFileInfo	The EclnGran process sends requests to the <b>Sybase ASE</b> to update file and granule information obtained from the Ingest database.
Request Granule Processing	One per granule processing request	<i>Process:</i> EclnGran <i>Class:</i> InGranuleAsync_S	<i>Process:</i> EclnReqMgr <i>Class:</i> InRequest	The EclnReqMgr sends processing requests to the <b>EclnGran</b> process for granule processing.
Cancel Granule	One per Granule	<i>Process:</i> EclnGran <i>Class:</i> InGranuleAsync_C	<i>Process:</i> EclnReqMgr <i>Class:</i> InRequest	The EclnReqMgr sends a cancel message to the <b>EclnGran</b> process.

**Table 4.2-4. INGST CSCI Process Interface Events (7 of 10)**

Event	Event Frequency	Interface	Initiated By	Event Description
Notify of Completion	One per granule completion	<i>Process:</i> EclnReqMgr <i>Library:</i> InGranuleC <i>Class:</i> InGranuleAsync_C	<i>Process:</i> EclnGran <i>Class:</i> InGranuleAsync_S	The EclnGran process sends a completion notification to the <b>EclnReqMgr</b> when a granule for a request is completed.
Transfer Files	One per Science Data file activity	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<i>Process:</i> EclnGran <i>Library:</i> InGranResource <i>Class:</i> InGranResourceIF	The EclnGran sends requests to the <b>EcDsStRequestManagerServer</b> to transfer (copy) data files to a staging disk.
Secure Transfer Files	One per request	<i>Process:</i> EcDsStRequestManagerServer <i>Library:</i> DsStRmClient <i>Class:</i> DsStRequestManager	<i>Process:</i> EclnGran <i>Library:</i> InGranResource <i>Class:</i> InGranResourceIF	The EclnGran sends requests to the <b>EcDsStRequestManagerServer</b> to secure transfer (scp) data files to a staging disk.
Request MCF	One per access of MCF	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Class:</i> DsCIDescriptor	<i>Process:</i> EclnGran <i>Library:</i> InPreprocess <i>Class:</i> InDataPreprocessTask	The EclnGran process requests the MCF template from the <b>EcDsScienceDataServer</b> .
Validate Metadata	One per metadata validation	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Class:</i> DsCIDescriptor	<i>Process:</i> EclnGran <i>Library:</i> InPreprocess <i>Class:</i> InDataPreprocessTask	The EclnGran process requests the <b>EcDsScienceDataServer</b> to perform a validation of the metadata files.

**Table 4.2-4. INGST CSCI Process Interface Events (8 of 10)**

Event	Event Frequency	Interface	Initiated By	Event Description
Request Data Search	One per granule pointer in linkage file	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Classes:</i> DsCIESDTReferenceCollector, DsCIQuery	<i>Process:</i> EcInGran <i>Library:</i> InPreprocess <i>Class:</i> InDataPreprocessTask	The EcInGran process sends a search request to the <b>EcDsScienceDataServer</b> for a granule corresponding to a particular ESDT short name and version, which has a particular local granule id.
Ingest Granules	One per insert into the archive	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Class:</i> DsCIRequest	<i>Process:</i> EcInGran <i>Library:</i> InPreprocess <i>Class:</i> InDataServerInsertionTask	The EcInGran process requests a file or files to be inserted into the SDSRV ( <b>EcDsScienceDataServer</b> ) inventory and archives, and the associated metadata is catalogued in the SDSRV inventory (archives), as a granule of a particular ESDT short name and version.
Return MCF Template	One per set of external data received by ECS	<i>Process:</i> EcInGran <i>Library:</i> InPreprocess <i>Class:</i> InDataPreprocessTask	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Class:</i> DsCIDescriptor	The EcInGran process receives the MCF information as part of the GetMCF service call from the <b>EcDsScienceDataServer</b> .
Return Granule URs	One per input pointer in metadata or per granule pointer in linkage file	<i>Process:</i> EcInGran <i>Library:</i> InPreprocess <i>Class:</i> InDataPreprocessTask	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Class:</i> DsCIQuery	The EcInGran process receives the granule URs for the granules requested in the data search from the <b>EcDsScienceDataServer</b> .
Send Distribution Notification	One per distribution request	<i>Process:</i> EcInEmailGWServer <i>Classes:</i> InEmailGWServer, InEmailParser	<i>Process:</i> EcDsDistributionServer <i>Library:</i> DsDdSSh <i>Classes:</i> DsDdMedia, DsDdMediaDist	The EcInEmailGWServer receives distribution notifications via e-mail from the <b>EcDsDistributionServer</b> .

**Table 4.2-4. INGST CSCI Process Interface Events (9 of 10)**

Event	Event Frequency	Interface	Initiated By	Event Description
Return Configuration Parameters	One set per request	<i>Process:</i> EcInReqMgr <i>Library:</i> InResource <i>Class:</i> InResourceIF	<i>Process:</i> EcCsRegistry <i>Library:</i> EcCsRegistry <i>Class:</i> EcRgRegistryServer_C	The <b>EcCsRegistry</b> returns the attribute-value pairs (configuration parameters) to the EcInReqMgr.
Request Communications Support	One service per request	<b>Process:</b> EcCsIdNameServer <b>Libraries:</b> EcPf, Middleware, FoNs, Folp, oodce <b>Classes:</b> EcPfManagedServer, EcPfClient, CCSMdwNameServer, FoNsNameServerProxy, CCSMdwRwNetProxy <b>Library (Common):</b> EcUr <b>Class:</b> EcUrServerUR <b>Library:</b> event <b>Class:</b> EcLgErrorMsg <b>Process:</b> EcCsRegistry <b>Library:</b> EcCsRegistry <b>Class:</b> EcRgRegistryServer_C	<b>Processes:</b> EcInReqMgr, EcInGran, EcInPolling, EcInGUI, EcInEmailGWServer	The <b>DCCI CSCI</b> provides a library of services available to each SDPS and CSMS process. The process services required to perform specific assignments are requested from the DCCI CSCI. These services include: <ul style="list-style-type: none"> <li>• CCS Middleware Support</li> <li>• Database Connection Services</li> <li>• File Transfer Services</li> <li>• Network &amp; Distributed File Services</li> <li>• Bulk Data Transfer Services</li> <li>• Name/Address Services</li> <li>• Server Request Framework (SRF)</li> <li>• Universal Reference (UR)</li> <li>• Error/Event Logging</li> <li>• Fault Handling Services</li> <li>• Mode Information</li> <li>• Query Registry - Retrieving the requested configuration attribute-value pairs from the Configuration Registry</li> </ul>

**Table 4.2-4. INGST CSCI Process Interface Events (10 of 10)**

Event	Event Frequency	Interface	Initiated By	Event Description
Query & Obtain Data	One per query of Ingest Database	Sybase ASE (COTS)	<i>Process:</i> EclnReqMgr <i>Library:</i> InDBaccUt <i>Classes:</i> InDataTypeTemplate, InRequestFileInfo, InRequestProcessData, InRequestProcessHeader, InCurrentDataTypeMap, InEDPAddressMap, InExternalDataProviderInfo, InGranuleServerInfo, InSystemParameters	The EclnReqMgr sends requests to the <b>Sybase ASE</b> for ingest processing information from the Ingest database.
Return Status (PAN or PDRD)	One per request	External Data Provider	<i>Process:</i> EclnReqMgr <i>Class:</i> InRequest	The EclnReqMgr returns status of a request to the <b>External Data Providers</b> via a Product Acceptance Notification (PAN) or a Product Delivery Record Discrepancy (PDRD).
Detect and Read Data	One per poll from EclnPolling	Various ID directories on various Ingest Local Disks	<i>Process:</i> EclnPolling <i>Class:</i> InPollingIngestSession	The EclnPolling polls for data files or Delivery Record files in an agreed location (on the <b>Ingest Local Disk</b> ).
Insert DAP	One per request	Ingest Local disk	<i>Process:</i> EclnPolling <i>Class:</i> InPollingIngestSession	Delivered Algorithm Packages (DAPs) are stored on the <b>Local Disk</b> for insertion into the SDPS with the Ingest Polling process.
Store Raw Data	One per data delivery	Ingest Local disk	External Data Providers	The <b>External Data Providers</b> send raw data to the ECS Ingest local disk via the FTP service.
Read From Tape	One per tape reader operation	Tape Drive	<i>Process:</i> EclnTapeReaderGUI	The EclnTapeReaderGUI reads the data from tape to copy to disk.
Copy Data	One per tar file on the tape	EclnTapeReaderGUI	System Call (a TAR command)	The EclnTapeReaderGUI copies data read from tape to disk.

#### 4.2.1.6 INGST Data Stores

The INGST CSCI uses the COTS product Sybase to store related INGST information on a physical medium. The stored information is divided into four functional areas:

1. Checkpoint and reactivate ingest processing
2. Summary or historical information for collecting and reporting metrics
3. Ingest configuration (e.g., thresholds) and template information
4. Validation tables for the INS GUI and software

Table 4.2-5 provides descriptions of the individual data stores used by the INGST CSCI. The architecture diagram shows a single data store entitled “Ingest Data Stores” for simplification.

**Table 4.2-5. INGST CSCI Data Stores (1 of 2)**

Data Store	Type	Description
InRequestProcessHeader	Sybase	Provides checkpoint storage of ingest request processing information associated with a given ingest request. Upon request process completion, copies of these records are stored in InRequestSummaryHeader data store and the request processing ingest information is deleted.
InRequestProcessData	Sybase	Provides checkpoint storage of data granule processing information associated with a given ingest request. Upon request process completion, copies of these records are stored in the InRequestSummaryData data store and the granule processing data information is deleted.
InRequestFileInfo	Sybase	Provides checkpoint storage of file information associated with a data granule within a given ingest request.
InRequestSummaryHeader	Sybase	Provides long-term storage of summary request-level statistics associated with a given ingest request. Summary records are copied upon ingest request processing completion and the processing records are deleted from the system.
InRequestSummaryData	Sybase	Provides long-term storage of summary data type statistics associated with a given data granule in a given ingest request. Summary records are copied upon ingest request processing completion and the processing records are deleted from the system.
InSourceMCF	Sybase	Initially, pre-populated with the valid metadata types for each file type. It “points” to the metadata and indicates “how” to handle the data in a standard object description language (ODL) format.
InSystemParameters	Sybase	Stores current system thresholds that limit ingest request traffic and data volume.
InExternalDataProviderInfo	Sybase	Stores thresholds on ingest request traffic and data volume for External Data Providers.
InValGranuleServerUR	Sybase	Provides the name of each configured Granule Server.
InGranuleServerInfo	Sybase	Stores thresholds on granule traffic and data volume for each Granule Server.
InDataTypeTemplate	Sybase	Initially, pre-populated with current, valid Earth Science Data Types (ESDTs) that the INS is capable of ingesting.

**Table 4.2-5. INGST CSCI Data Stores (2 of 2)**

<b>Data Store</b>	<b>Type</b>	<b>Description</b>
InGranuleQueue	Sybase	Stores the granule server queues.
InFileTypeTemplate	Sybase	Initially, pre-populated with all valid file types that make up an ESDT.
InMediaType	Sybase	Stores the valid values of the media types available that can be ingested.
InNextAvailableID	Sybase	Stores the next available RequestID to be given.
InValDataGranuleState	Sybase	Stores all the valid values for a data granule state.
InValIngestType	Sybase	Stores all the valid values for an ingest type.
InValNotifyType	Sybase	Stores all the valid values for a notify type.
InValParameterClass	Sybase	Initially, pre-populated with all the valid values for a parameter class.
InValRequestState	Sybase	Stores all the valid values for a request state.
InEDPAddressMap	Sybase	Initially, pre-populated with the IP address for an External Data Provider.
InCurrentDataTypeMap	Sybase	Initially pre-populated with current valid Earth Science Data Types (ESDTs) Ingest is capable of ingesting and the current Ingest version id for each one.

## **4.2.2 Ingest Subsystem Hardware**

### **4.2.2.1 Ingest Client Hardware CI Description**

The Ingest Client HWCI (ICLHW) Server accommodates the required ingest volumes, including I/O, and processing capabilities to support internal data transfers associated with metadata validation and extraction, and to transfer data to the Data Server or Data Processing Subsystem. The disks are sized to accommodate the functionality and provide contingency space for the transfer of more than one day's worth of data within a 24-hour period.

The Ingest Server is a 64-bit SGI machine. Dual processors are installed on the Ingest Server (See 920-TDx-001 series of base-line documents).

The Ingest Server is configured with at least 256 MB of memory with one-way interleaving to support the processors.

The SGI architecture provides configuration for I/O subsystems that attach to the backplane. These I/O subsystem items are referred to as IO cards. Each IO card provides serial and parallel connections, two fast-wide differential SCSI-2 channels, and space for two HIO controller cards. An HIO controller card offers a Gigabit Ethernet card and a card supporting three SCSI-2 channels.

The number of IO cards specified for each Ingest Server is determined by allocating HIO slots to the High-speed Gig Ethernet interfaces, and counting the number of SCSI-2 interfaces required. The number of internal and external SCSI-2 devices supported by the system determines the number of SCSI-2 interfaces required. The first SCSI-2 channel is delegated to internal devices like CD-ROMs, floppy disk drives, and tape drives. Internal disks ranging in aggregate size from

four GB to eight GB are allocated to the second SCSI-2 channel. External disk arrays are allocated to subsequent SCSI-2 channels and the number of channels is based on the required throughput of the external file systems (See 920-TDx-001 and 922-TDx-009 series of base-line documents).

The internal disks on an Ingest Server are used to provide swap space for the operating system and to provide file space for the operating system and applications (See 920-TDx-001 and 922-TDx-009 series of base-line documents).

The external disk arrays are SCSI-2 based RAID units from SGI. The implementation of these ingest buffer arrays are RAID Level 3 and RAID Level 1 for the database and logs (See 922-TDx-009 series of base-line documents). The SGI RAID units use one redundant disk for each four data disks in the RAID Level 3 configuration, and these are built into groups of five disks, with up to four groups (20 disks) per RAID enclosure.

Each enclosure contains two controllers that can access one or more groups of disks in the enclosure. Both controllers can access a group of disks within an enclosure, however, only one controller can access the group at a time. This dual attachment enables the striping of disk volumes across controllers for high throughput and for implementing fail-over of controllers.

A central High-speed Gig Ethernet switch High-speed Gig Ethernet network is used to implement the ICLHW and Data Repositories with switched 800 Mbps interface ports connected directly to the ICLHW and Data Repository hosts (See 920-TDx-001, 920-TDx-002, 921-TDx-003, AND 921-TDx-004 series of base-line documents).

#### **4.2.2.2 Ingest Workstation Description**

The Ingest Workstation is provided to execute the Ingest GUI. This workstation enables the operator to remotely monitor the Ingest Servers and the Ingest processes, from media ingest to remote ingest.

The Ingest Workstation is a 64-bit Sun machine. For information on the processor used on the Ingest Workstation see the 920-TDx-001 series of base-line documents.

The Ingest Workstation is equipped with at least 128 MB of memory (See 920-TDx-001 series of base-line documents).

The Ingest Workstation is equipped with two fast SCSI-2 connections.

The Ingest Workstation internal disks, providing an aggregate space of eight GB, provide swap space and file system space for the operating system and applications (See 920-TDx-001 series of base-line documents). There are no external disk arrays.

### **4.3 Client Subsystem Overview**

The Client Subsystem (CLS) is a set of CSCIs and processes that provide ECS end-user services.


These services include allowing users to:

- Submit ASTER on-demand orders
- Submit ASTER Data Acquisition Requests (DARs)
- Create, retrieve and update ECS user profiles
- View HDF formatted files


In addition, the workstations operating within an ECS CLS contains infrastructure support software as part of the CSS and platform support software.

#### **Client Subsystem Context**

Figure 4.3-1 is the Client Subsystem context diagrams. The diagrams show the events sent to the CLS and the events the CLS sends to other SDPS or CSMS subsystems.

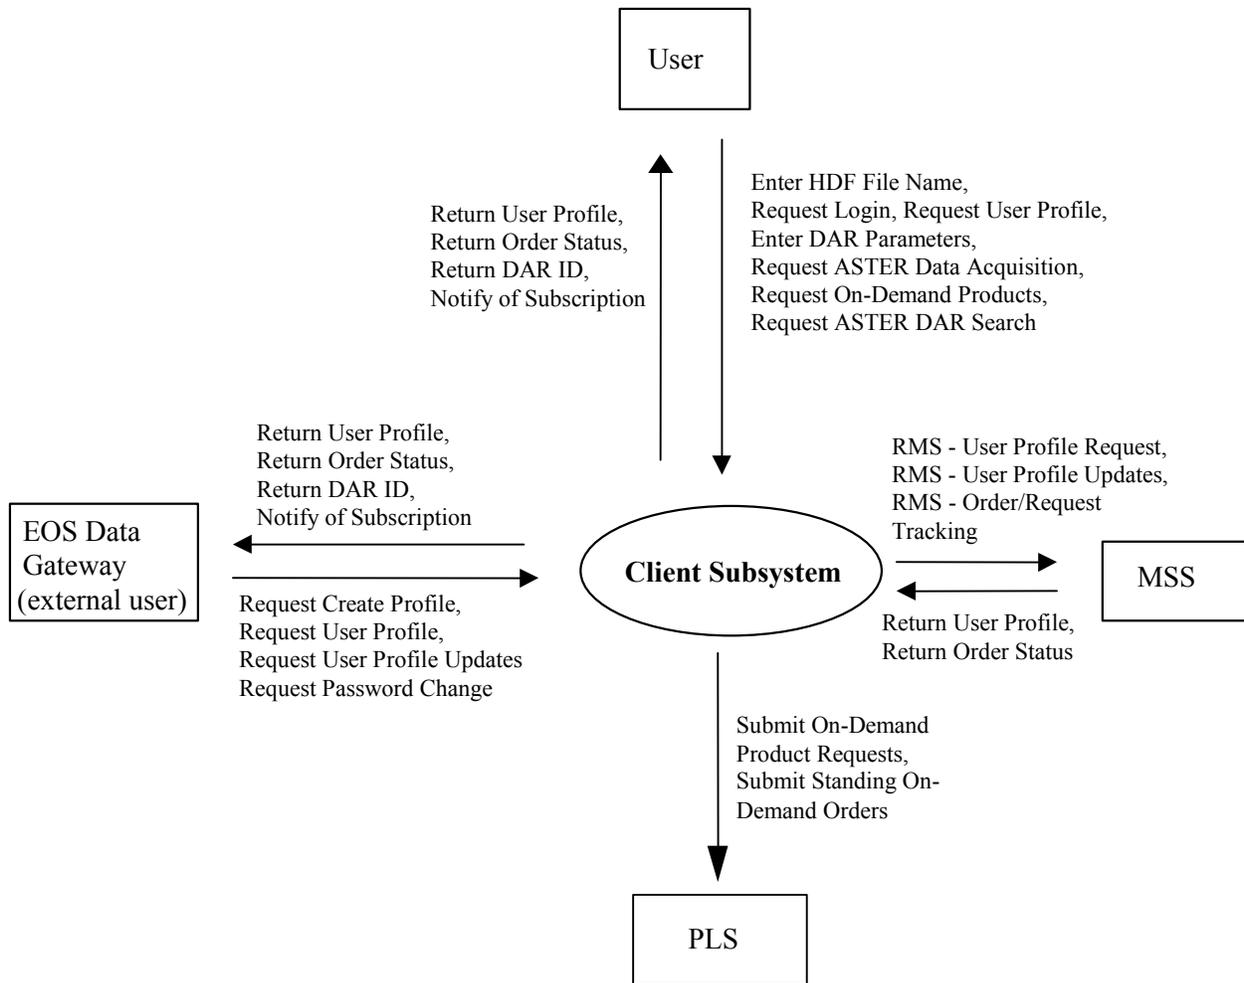

**Figure 4.3-1. Client Subsystem Context Diagram**

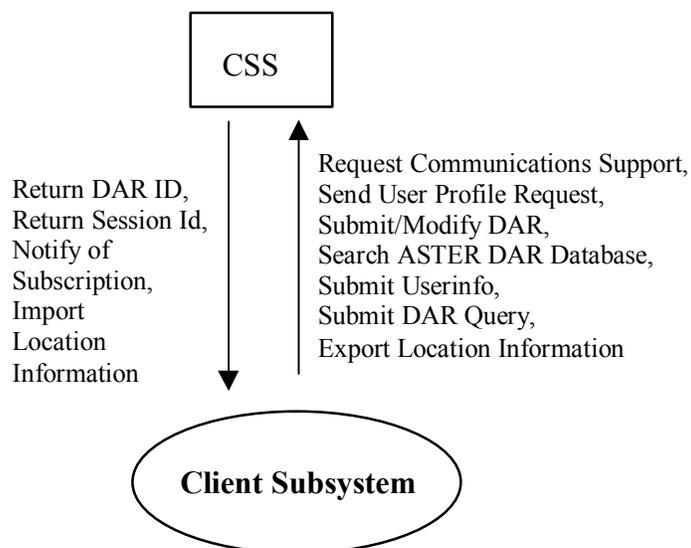

**Figure 4.3-1. Client Subsystem Context Diagram (cont.)**

The EOS Data Gateway, the Version 0 Client (Web version) performs the data searches and retrievals. The EOS Data Gateway is treated as an external entity since the design and design documentation is controlled under another contract. Documentation on the V0 Web Client (EOS Data Gateway) design can be accessed through the Universal Resource Locator <http://harp.gsfc.nasa.gov/~imswww/pub/manuals/imsdesign.html>.

Table 4.3-1 provides descriptions of the interface events shown in the Client Subsystem context diagram.

**Table 4.3-1. Client Subsystem Interface Events (1 of 4)**

Event	Interface Event Description
Enter HDF File Name	This is a file name for a Hierarchical Data Format (HDF) file. The <b>user</b> opens the file to see the data in the file.
Request Login	A user name and password for the <b>user</b> are provided for access to the ECS. The user name and password are sent to the CSS (via a request for communications support).
Enter DAR Parameters	The <b>user</b> enters parameters (as specified in the Interface Control Document (ICD)) required for submittal or modification of Data Acquisition Requests (DARs) in accordance with the ASTER GDS Interface Requirements Document (IRD). Upon completion of the selection or modification of DAR parameters, the user may submit a DAR. In addition, the user may specify DAR parameters for a search of the DAR database.

**Table 4.3-1. Client Subsystem Interface Events (2 of 4)**

Event	Interface Event Description
Request ASTER Data Acquisition	A <b>user</b> submits a request (to the CLS) to have ASTER data taken (a data acquisition request or DAR) using the parameters entered into the Java DAR Tool. DAR parameters are required for submittal of DARs as specified in the ASTER GDS IRD/ICD. As the result of a successfully submitted DAR, the user receives a DAR ID. This is a string of characters used to track a DAR. The user receives notification every time data resulting from this DAR is received by the ECS.
Request On-Demand Products	The <b>user</b> selects the On-demand Product (ASTER L1B, ASTER DEM, ASTER higher Level) and a processing parameter(s) to provide to the PLS.
Request ASTER DAR Search	A <b>user</b> submits a request (to the CLS) to search the ASTER DAR database by DAR parameters or a specific DAR ID to determine if a scene of interest (to the user) has been acquired by the ASTER instrument.
Request Management Services	<p>The <b>MSS</b> provides a basic management library of services to the subsystems, implemented as client or server applications, using the CSS Process Framework. The basic management library of services includes:</p> <ul style="list-style-type: none"> <li>• <b>System startup and shutdown</b> - Please refer to the release-related, current version of the Mission Operations Procedures for the ECS Project document (611) and the current ECS Project Training Material document (625), identified in Section 2.2.1 of this document.</li> <li>• <b>Create Profile Request</b> - The <b>MSS</b> receives user information for becoming a registered user of the ECS from the CLS. The MSS sends a response to the user when the request is received.</li> <li>• <b>User Profile Request</b> - The <b>MSS</b> provides requesting subsystems with User Profile parameters such as e-mail address and shipping address upon request by authorized users to support their processing activities.</li> <li>• <b>Order/Request Tracking</b> - The CLS uses CGI scripts to interface with the <b>MSS</b> Order/Request Tracking service to create a user product order and submit the order to the PLS.</li> <li>• <b>User Profile Updates</b> - The <b>MSS</b> receives user profile parameter updates from a user and makes the updates in the user profile database.</li> <li>• <b>Password Change Request</b> - The CLS sends requests on behalf of ECS users to the <b>MSS</b> to change users' authenticators in the MSS database.</li> </ul>
Return User Profile	The user profile is returned from the <b>MSS</b> to the CLS to be returned to the external user via the EOS Data Gateway.
Return Order Status	The CLS receives an order id and status for the requested ECS product from the <b>MSS</b> and returns the order id and status to the ECS or V0 IMS (via the EDG) user (to track the order).
Submit On-Demand Product Requests	The CLS submits the on-demand request to the <b>PLS</b> . As a result, the user receives an Order ID. The user receives a notification when the request is processed.
Submit Standing On-Demand Orders	The CLS sends standing on-demand orders to the <b>PLS</b> .

**Table 4.3-1. Client Subsystem Interface Events (3 of 4)**

Event	Interface Event Description
Request Create Profile	Users submit a request to be a registered user of the ECS. Registered users can be given special privileges not awarded to guests, such as the capability to order data on a media at a cost. The user request is sent through the <b>EOS Data Gateway (EDG)</b> , which creates both an EDG and an ECS User Profile. The user enters his or her addresses (user, shipping, billing and e-mail) and other important information. This profile information is used to establish an EDG profile and is forwarded through the CLS to the MSS. The MSS creates the ECS profile.
Request User Profile	A User Profile Request is a search for a User Profile from the user via the <b>workbench</b> or <b>EDG</b> . In response, the CLS receives the user profile, which contains information about a user that must be maintained. This includes, but is not limited to, mailing, billing, and shipping addresses, phone number, electronic mail address, project account number and project organization.
Request User Profile Updates	The user can update their User Profile information through the <b>EOS Data Gateway</b> . This includes their addresses (user, shipping, billing, and e-mail) and other important information. This updated profile information (profile2.odl) is forwarded through the CLS to the MSS. The EOS Data Gateway uses the profile2.odl file rather than a live interface with the CLS as its source of user information.
Request Password Change	The user can request a change of his/her EDG User Profile passwords through the <b>EOS Data Gateway</b> . The user enters his current and new passwords. This information is used to change the EDG password and the passwords (old and new) are forwarded through the CLS to the MSS. The MSS changes the ECS password.
Return DAR ID	As the result of a successfully submitted DAR, the user receives a DAR ID from the <b>CSS</b> via the CLS or EDG. This is a string of characters used to track a DAR.
Notify of Subscription	The user receives notification every time data resulting from a successfully submitted DAR is received by the ECS from the <b>CSS</b> via the CLS or EDG.
Request Communications Support	<p>The <b>CSS</b> provides a library of services available to each SDPS and CSMS subsystem. The subsystem services required to perform specific assignments are requested from the CSS. These services include:</p> <ul style="list-style-type: none"> <li>• CCS Middleware Support</li> <li>• Database Connection Services</li> <li>• Name/Address Services</li> <li>• Server Request Framework (SRF)</li> <li>• Universal Reference (UR)</li> <li>• Error/Event logging</li> <li>• Mode Information</li> <li>• Query Registry - Retrieving the requested configuration attribute-value pairs from the Configuration Registry</li> <li>• Request Distribution Media Options from the Configuration Registry</li> </ul>

**Table 4.3-1. Client Subsystem Interface Events (4 of 4)**

Event	Interface Event Description
Send User Profile Request	The CLS sends a user profile request to the <b>CSS</b> to communicate with the ASTER GDS.
Submit/Modify DAR	The user submits a DAR after selecting or modifying DAR parameters to the <b>CSS</b> . As the result of a DAR submission, the user receives a DAR ID. This is a string of characters used to track a DAR. The user receives notification every time data resulting from this DAR is received by the system.
Search ASTER DAR Database	The CLS submits a request to the <b>CSS</b> to search the ASTER GDS DAR database for DARs and their respective status (i.e., acquired scenes). Search qualifications may be in the form of DAR parameters or DAR IDs. To get a status of the search, users may view the Search Status via the Java DAR Tool.
Submit Userinfo	User name and password are sent to the <b>CSS</b> .
Submit DAR Query	The CLS sends the parameters required for querying DARs to the <b>CSS</b> as one of the following three queries: queryxARContents, queryxARScenes, or queryxARSummary. The results of the query are returned to the CLS.
Export Location Information	The CCS Middleware CSC stores physical and logical location information received from DPS in the <b>CSS</b> (CCS NameServer).
Return Session Id	The <b>CSS</b> returns a session id to the CLS for the user to communicate with the ASTER GDS.
Import Location Information	The CLS requests server location information from the <b>CSS</b> (CCS NameServer).

### Client Subsystem Structure

The Client Subsystem is three CSCIs:

- The Workbench (WKBCH) CSCI includes the set of ECS applications and libraries that provide access to the ECS data and services. There are two tools: the EOSView and the Java DAR Tool (JDT). The EOSView is an X/Motif application resident on a science user's workstation. The Java DAR Tool is a java-based web application that can be accessed through a web browser.
- The ODFRM CSCI consists of HTML pages and CGI programs. The user creates an On-demand processing request and sends the request to the PLS. The PLS processes the request and sends a notification to the user.
- The Desktop (DESKT) CSCI provides the User Profile Gateway server to communicate with the MSS User Registration Server for creating new user accounts, obtaining user profile information to update user information.

The CLS contains no HWCIs. The DMS hardware (Interface Servers) provides the processing and storage for the WKBCH software. In addition, the User Profile Gateway Server is used to create, retrieve and update user profiles for ECS users via the EOS Data Gateway. The CLS is required to support the following hosts: SGI IRIX17, and SUN Solaris8. Currently, the ECS only

supports Personal Computers running Windows 95 and higher versions of windows and SUN Solaris running with Netscape Navigator versions of 4.7 and higher versions.

The Interface Servers are SUN Ultra 3000 Server class machines. Detailed specifications can be found in the site-specific hardware design diagram, 920-TDx-001. Because of their common configuration, these servers can be used interchangeably. The Workbench software executed on these hosts enables user access to the ECS data and services. The Interface Servers also provide storage for user session data and the Java DAR Tool (JDT) map data. User session data is considered critical and thus stored in a Redundant Array of Inexpensive Disks (RAID) for high availability.

Detailed mappings can be found in the site-specific hardware/software mapping in baseline document number 920-TDx-002.

A SUN SPARC Storage Array Model 114, is dual ported between both hosts and provides storage for the user session data as described. A detailed configuration is specified per disk partition, and can be found in baseline document number 922-TDx-009.

Custom code and client applications are loaded on the internal disks of all hosts to prevent dependencies on specific hosts or peripherals. Real time or transaction-oriented data (i.e., user session data) is stored in the RAID. The Interface Servers are both “hot” and share the resident RAID device. In the event of a host failure, the operational server assumes total ownership of the RAID and its processes. While in this state, the operational server is recognized to be running in degraded mode until recovery is completed.

### **Use of COTS in the Client Subsystem**

- Netscape Navigator

The Netscape Navigator Web browser accesses the CLS inside a DAAC. The users can use the Web browsers they already have at their facilities.

- iPlanet Web Server

The iPlanet Web Server is used to serve the Web pages for the Java DAR Tool and the ODFRM.

- Providence Software Solution’s DSC

The Development Solution for the C programming Language (DSC) is used as a widget set and development tool for the EOSView application of the WKBCH CSCI.

- Interactive Data Language (IDL)

IDL is used by EOSView to provide the visualization features for users.

- CCS Middleware Client

CCS Middleware Client provides CLS with communications between other subsystems. CCS Middleware can reside on one or both sides of the interface. An instance must be installed on the platform where CLS resides. Although the CCS Middleware Client is part of CSS, this

COTS product must be installed for CLS to run in the SDPS operational and test environment. The Java DAR Tool does not require the use of CCS Middleware.

### **Error Handling and processing**

EcUtStatus is a class used throughout the ECS custom code for general error reporting. It is almost always used as a return value for functions and allows detailed error codes to be passed back up function stacks.

The WKBCH CSCI contains the EOSView and Java DAR Tool (JDT) standalone COTS products. EOSView has its own custom error handling.

The JDT uses the Java exception facilities to check error conditions. Exceptions are either handled in the class that produced the error or they are sent back to the calling method/class. At some point in the calling chain, the exception is either handled by the application code or it is dumped out in the stack trace (which appears in the Java Console if it's a client-side exception or in the jess.log if it's a server-side exception). The JDT's exception classes are organized in an exceptions package (jdt.aux.exceptions).

The ODFRM CSCI has no special error handling. ODFRM is a cgi application, which uses EcUtStatus to communicate errors. Functions can return an EcUtStatus object, indicating success or failure.

The DESKT CSCI consists of the User Profile Gateway. The User Profile Gateway uses EcUtStatus and exceptions. Functions can return an EcUtStatus object, indicating success or failure or throw an exception. The User Profile Gateway does not have any special error processing.

## **4.3.1 Workbench Computer Software Configuration Item Description**

### **4.3.1.1 Workbench Functional Overview**


The Workbench (WKBCH) CSCI is a set of application programs, which implement the core functionality of the CLS science user interface. The V0 Client performs the data search and retrieval. The EOS Data Gateway is treated as an external entity since the design and design documentation is controlled under another contract. The WKBCH CSCI provides users the capability to submit data acquisition requests for the ASTER instrument data, and to see data products in HDF format.

The Java DAR Tool handles user requests to acquire ASTER data from the satellite. The user specifies when and where the data is to be taken. The DAR is submitted to the ASTER GDS in Japan for review. The acceptance of the DAR by Japan is not immediate (though the acknowledgment of receipt is) and the Java DAR Tool cannot determine the DAR status immediately. In addition to the submission and modification of acquisition requests, the Java DAR Tool allows users to search the ASTER DAR database (via MOJO and the DAR Communications Gateway) in order to examine the status of DARs (i.e., the number and quality of acquired scenes). Search for DARs on a parameter base or by DAR Id. The Java DAR Tool is a java-based web tool that runs on Sun workstations and PCs.

EOSView is an HDF-EOS viewer that enables users to visualize data they receive from the ECS. EOSView can take any HDF-EOS data file and perform basic visualization functions on it. EOSView is not meant to provide sophisticated data analysis functions like those found in COTS products such as IDL. EOSView is a GUI application used on UNIX platforms using X/Windows and Motif.

#### 4.3.1.2 Workbench Context

Figure 4.3-2 is the WKBCH CSCI context diagram. The diagram shows the events sent by WKBCH to other SDPS and CSMS subsystems and events sent to WKBCH from the other SDPS and CSMS subsystems.

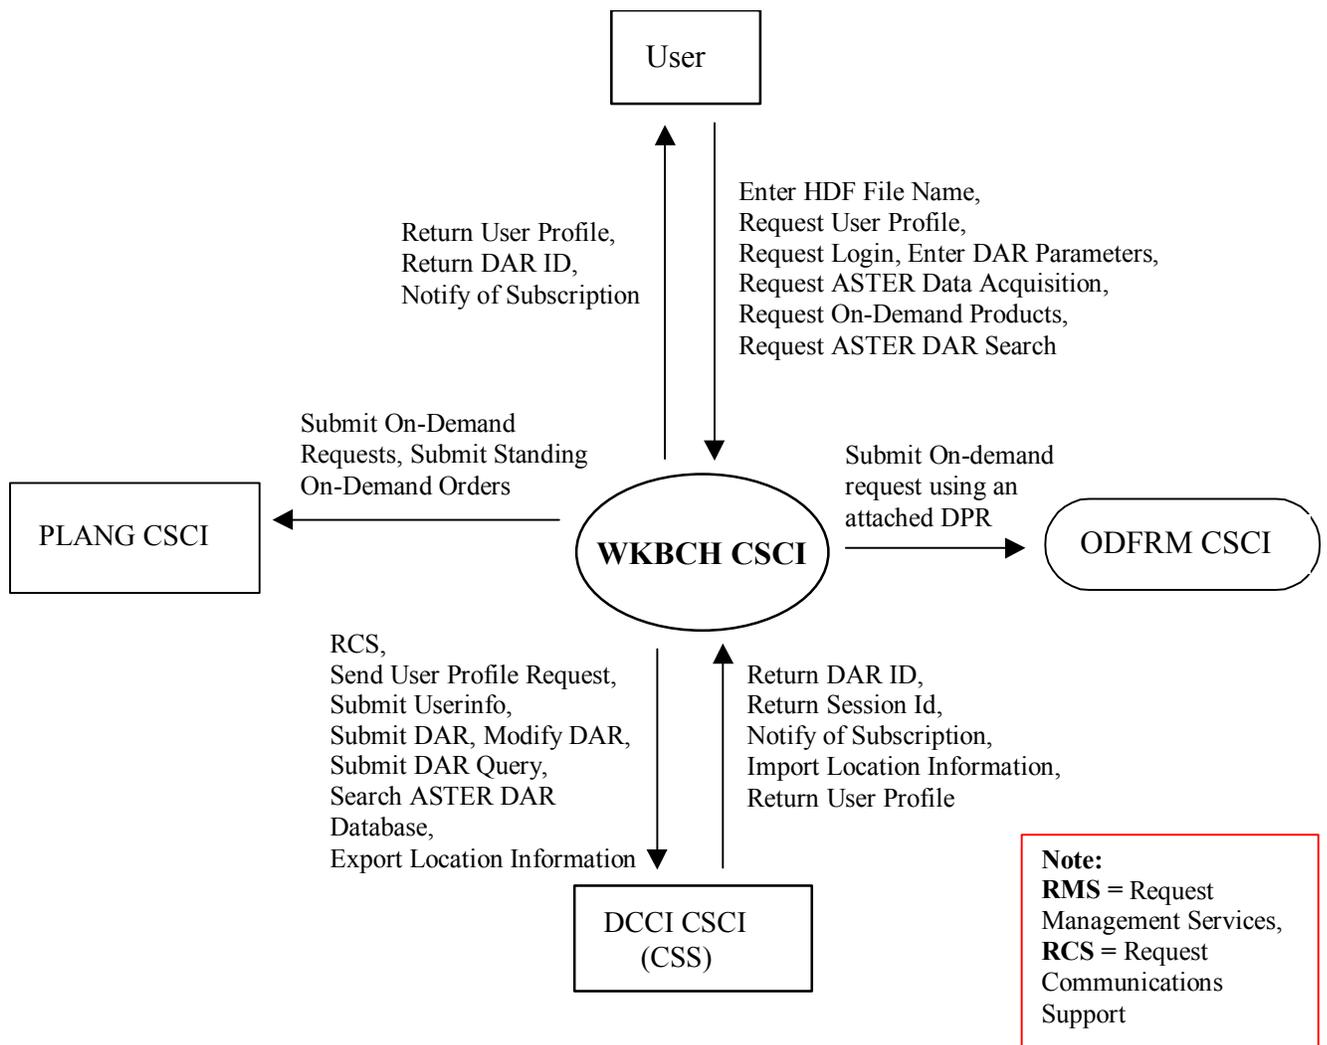

**Figure 4.3-2. WKBCH CSCI Context Diagram**

Table 4.3-2 provides descriptions of the interface events shown in the WKBCH CSCI Context Diagram.

**Table 4.3-2. WKBCH CSCI Interface Events (1 of 3)**

Event	Interface Event Description
Enter HDF File Name	This is the name of an HDF file to be opened in EOSView. A file name passed to EOSView enables EOSView to present the file contents to the <b>user</b> . This file can be obtained through any means (i.e., from a search, browse, acquire, or from a friend). The EOSView enables the user to manipulate an HDF file into multiple types of displays. Images, metadata, and actual data values can be viewed. Multiple images can be animated.
Request User Profile	A User Profile Request is a search for a User Profile from the <b>user</b> . There are two methods used, one is by an encrypted user name and password and the other is by user identification (ID). In response, the WKBCH CSCI receives the user profile, which contains information about a user that must be maintained. This includes mailing, billing, and shipping addresses, phone number, electronic mail address, etc.
Request Login	Enter the user name and password that identifies the user to the ECS. The WKBCH CSCI receives the user name and password and requests a user profile from the MCI for the <b>user</b> .
Enter DAR Parameters	The <b>user</b> enters parameters (as specified in the Interface Control Document (ICD)) required for submittal or modification of Data Acquisition Requests (DARs) in accordance with the ASTER GDS Interface Requirements Document (IRD). Upon completion of the selection or modification of DAR parameters, the user may submit a DAR. In addition, the user may specify DAR parameters for a search of the DAR database.
Request ASTER Data acquisition	A <b>user</b> submits a request (to the CLS) to have ASTER data taken (a data acquisition request or DAR) using the parameters entered into the Java DAR Tool. DAR parameters are required for submittal of DARs as specified in the ASTER GDS IRD/ICD. As the result of a successfully submitted DAR, the user receives a DAR ID. This is a string of characters used to track a DAR. The user receives notification every time data resulting from this DAR is received by the ECS.
Request On-Demand Products	The <b>user</b> selects the On-demand Product (ASTER L1B, ASTER DEM, ASTER higher Level) and a processing parameter(s) to provide to the PLS.
Request ASTER DAR Search	A <b>user</b> submits a request (to the CLS) to search the ASTER DAR database by DAR parameters or a specific DAR ID to determine if a scene of interest (to the user) has been acquired by the ASTER instrument.
Submit On-demand request using an attached DPR	The <b>ODFRM CSCI</b> receives an on-demand request using an attached DPR from the WKBCH CSCI.
Return DAR ID	As the result of a successfully submitted DAR, the <b>DCCI CSCI</b> sends a DAR ID to the WKBCH CSCI. The <b>user</b> receives a DAR ID from the WKBCH CSCI. This is a string of characters used to track a DAR.
Return Session Id	The <b>DCCI CSCI</b> returns a session id to the WKBCH CSCI for the user to communicate with the ASTER GDS.

**Table 4.3-2. WKBCH CSCI Interface Events (2 of 3)**

Event	Interface Event Description
Notify of Subscription	The <b>DCCI CSCI</b> sends notification to the WKBCH CSCI when the data for a subscription arrives in the ECS. The <b>user</b> receives notification every time data resulting from a successfully submitted DAR is received by the ECS from the DCCI CSCI via the WKBCH CSCI.
Import Location Information	The WKBCH CSCI receives physical and logical server location information from the <b>DCCI CSCI</b> .
Return User Profile	The <b>DCCI CSCI</b> returns a user profile based upon a request from the user. The <b>user</b> receives the profile information from the WKBCH CSCI.
Request Communications Support	The <b>DCCI CSCI</b> provides a library of services available to each SDPS and CSMS CSCI. The CSCI services required to perform specific assignments are requested from the DCCI CSCI. These services include: <ul style="list-style-type: none"> <li>• CCS Middleware Support</li> <li>• Database Connection Services</li> <li>• Network &amp; Distributed File Services</li> <li>• Name/Address Services</li> <li>• Password Services</li> <li>• Server Request Framework (SRF)</li> <li>• Universal Reference (UR)</li> <li>• Error/Event Logging</li> <li>• Fault Handling Services</li> <li>• Mode Information</li> <li>• Query Registry - Retrieving the requested configuration attribute-value pairs from the Configuration Registry</li> </ul>
Send User Profile Request	The WKBCH CSCI sends a user profile request to the <b>DCCI CSCI</b> to communicate with the ASTER GDS.
Submit Userinfo	The user name and password are sent to the <b>DCCI CSCI</b> . The DCCI CSCI sends back a session id.
Submit DAR	The WKBCH CSCI submits a request to the <b>DCCS CSCI</b> to have ASTER data taken (a data acquisition request or DAR) using the parameters entered into the Java DAR Tool. DAR parameters are required for submittal of DARs as specified in the ASTER GDS IRD/ICD. As the result of a successfully submitted DAR, the user receives a DAR ID. This is a string of characters used to track a DAR. The user receives notification every time data resulting from this DAR is received by the ECS.
Modify DAR	The WKBCH CSCI sends the modified DAR parameters to the <b>DCCI CSCI</b> to submit a DAR to the ASTER GDS.
Submit DAR Query	The WKBCH CSCI sends the parameters required for querying DARs to the <b>DCCI CSCI</b> as one of the following three queries: queryxARContents, queryxARScenes, or queryxARSummary. The results of the query are returned to the WKBCH CSCI.
Search ASTER DAR database	A user submits a request to the <b>DCCI CSCI</b> to search the ASTER GDS DAR database for DARs and their respective status (i.e., acquired scenes). Search qualifications may be in the form of DAR parameters or DAR Ids. To get a status of the search, users may view the Search Status via the Java DAR Tool.
Export Location Information	The WKBCH CSCI sends the server physical and logical location information to the <b>DCCI CSCI</b> .


**Table 4.3-2. WKBCH CSCI Interface Events (3 of 3)**

Event	Interface Event Description
Submit On-Demand Requests	The WKBCH CSCI submits the on-demand request to the <b>PLANG CSCI</b> . As a result, the user receives an Order ID. The user receives a notification when the request is processed.
Submit Standing On-Demand Orders	The WKBCH CSCI sends standing on-demand orders to the <b>PLANG CSCI</b> .
Request Management Services	The <b>MCI</b> provides a basic management library of services to the subsystems, implemented as client or server applications, using the DCCI CSCI Process Framework. The basic management library of services includes: <ul style="list-style-type: none"> <li>• <b>System startup and shutdown</b> - Please refer to the release-related, current version of the Mission Operations Procedures for the ECS Project document (611) and the current ECS Project Training Material document (625), identified in Section 2.2.1 of this document.</li> </ul>

### 4.3.1.3 Workbench Architecture

EOSView and the DAR Tool run on the user’s workstation. Since these tools have no interfaces to each other and have distinct operations, their uses are described separately. Figure 4.3-3 is the EOSView architecture diagram. The diagram shows the events sent to the EOSView tool.

Since EOSView is a stand-alone application, it has no interfaces and gets initialized from the command line of a Unix platform. EOSView allows the user to provide a HDF file name to view HDF formatted files.

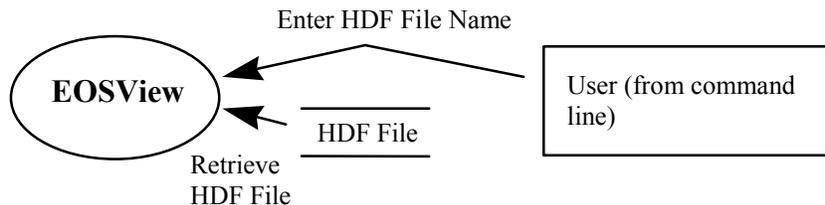


**Figure 4.3-3. EOSView Architecture Diagram**

Figure 4.3-4 is the Java DAR Tool architecture diagram. The diagram shows the events sent to the JDT process and the events the JDT process sends to other CSCIs, CSCs, or processes.

The Java DAR Tool is initiated from the web browser as an applet and can be initiated from the command line as a Java application. The Java DAR Tool uses the CSS MOJO Gateway as the gateway to all ECS services. JDT submits DARs to the CSS MOJO Gateway, which in turn submits them to the DAR Communications Gateway CSC. DAR requests can be a DAR submission or a modification to an existing DAR. After the DAR is successfully submitted, the Java DAR Tool submits a subscription on behalf of the user to get notification when the data associated with the DAR is ingested into the ECS. The Java DAR Tool retrieves the

configuration parameters from the jdt.cfg file (ShortName, VersionId, Action) to determine the parameters to send to the Subscription Server.

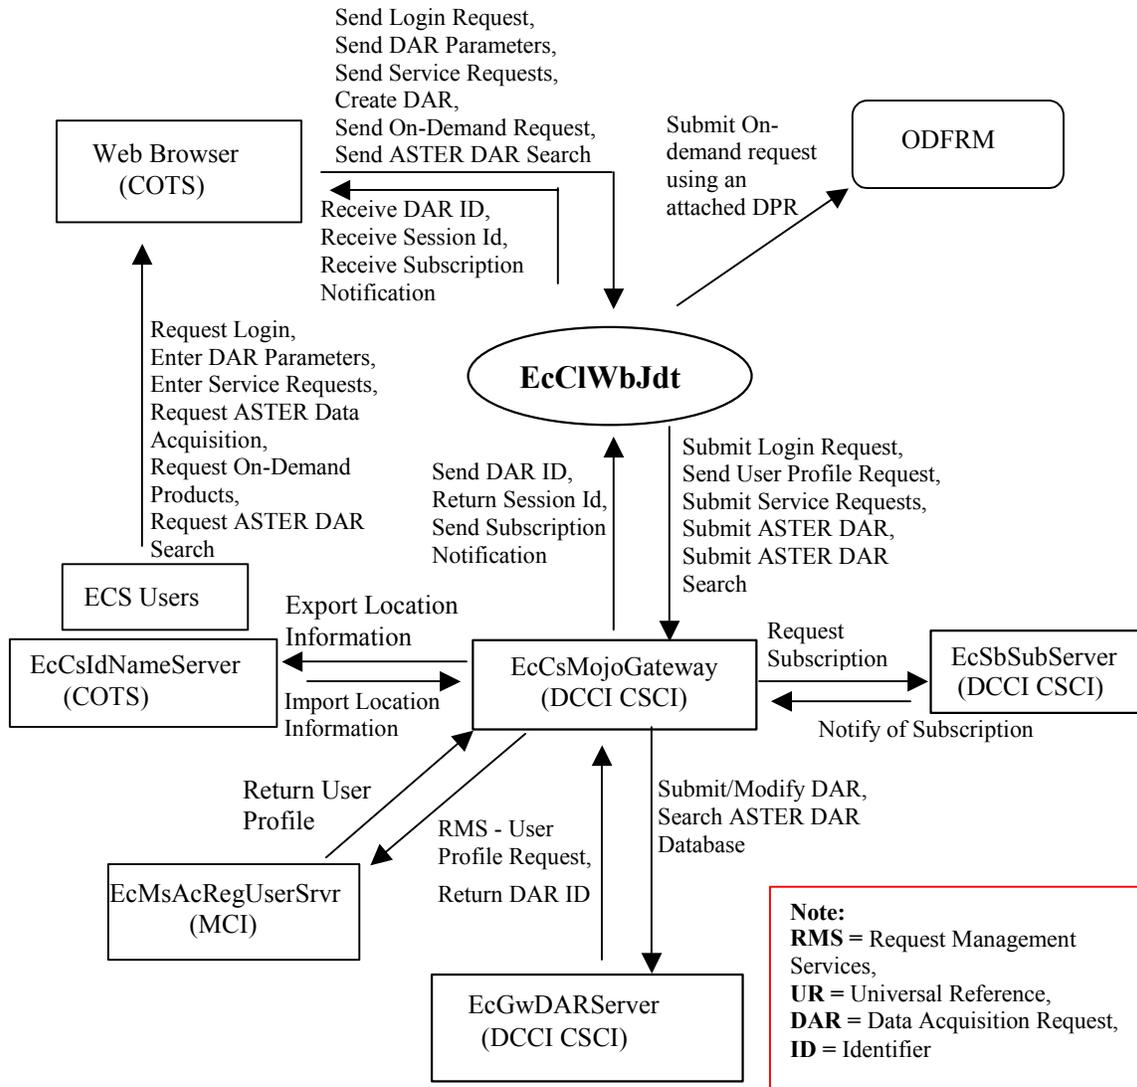

**Figure 4.3-4. Java DAR Tool Architecture Diagram**

#### 4.3.1.4 Workbench Process Descriptions

Table 4.3-3 provides descriptions of the processes shown in the EOSView and DAR Tool Architecture Diagrams.

**Table 4.3-3. WKBCH CSCI Processes**

Process	Type	COTS/ Developed	Functionality
EOSView	GUI	Developed	This is the end user tool that provides data visualization functions for the ECS data. It is used by general users of the system and personnel within the DAAC and SCF for Quality Assurance (QA) checks of products.
EcCIWbJdt	GUI	Developed	This is a Java GUI that enables users to submit DARs to the ASTER GDS through the CSS DAR Communications Gateway (via CSS MOJO Gateway). When the DAR is submitted, a DAR Identifier is returned to the user. A subscription is submitted on behalf of the user, asking for notification whenever a data granule with the specified DAR ID is inserted into the SDPS archives. The Java DAR Tool also has the capability to modify DARs in accordance with the ASTER ICD. In addition, the Java DAR Tool allows the user to search for and retrieve DARs and their status (i.e., the scenes acquired).
EcCIDtUserProfile Gateway	Server	Developed	The User Profile Gateway is a retrieval engine for users via the EOS Data Gateway. The server listens for calls on a socket from the EOS Data Gateway. Server Supports: <ul style="list-style-type: none"> <li>Multiple concurrent requests</li> </ul>

#### 4.3.1.5 Workbench Process Interface Descriptions

Table 4.3-4 provides descriptions of the process interface events shown in the EOSView and Java DAR Tool architecture diagrams.

**Table 4.3-4. WKBCH CSCI (EOSView) Process Interface Events (1 of 9)**

Event	Event Frequency	Interface	Initiated By	Event Description
Enter HDF File Name	One per user identified file	Read from command line.	User <i>Process:</i> EOSView (COTS)	The user types a file name on the <b>EOSView</b> user interface to tell the GUI which file to open.
Retrieve HDF File	One file per request	File name provided by the user as read from the script file that captured it while active.	<i>Process:</i> EOSView (COTS)	The <b>EOSView</b> process retrieves the HDF File from a data store based on the file name provided by the user.

**Table 4.3-4. WKBCH CSCI (Java DAR Tool) Process Interface Events (2 of 9)**

Event	Event Frequency	Interface	Initiated By	Event Description
Submit On-demand request using an attached DPR	One per request	ODFRM <i>Process:</i> EcCIodProductRequest <i>Library:</i> CIodCommon <i>Class:</i> CIodProductRequest	<i>Process:</i> EcCIWbJdt <i>Libraries:</i> EcCIWbJestCl.jar, jh.jar, EcCIWbJestSv.jar, jaf.jar, javamail.jar <i>Classes:</i> (many: See Appendix C)	The EcCIWbJdt submits a request to the <b>ODFRM</b> for an on-demand request using an attached DPR.
Submit Login Request	One per User	<i>Process:</i> EcCsMojoGateway <i>Class:</i> EcMjDCELoginProxy	<i>Process:</i> EcCIWbJdt <i>Class:</i> CIWbUrUserInfo	The EcCIWbJdt sends the user name and password to the <b>EcCsMojoGateway</b> for use of ECS data and services.
Request User Profile	One per request	<i>Process:</i> EcCsMojoGateway <i>Class:</i> EcMjRetrieveProfileProxy	<i>Process:</i> EcCIWbJdt <i>Class:</i> JDTApplet	The EcCIWbJdt sends user profile requests to the <b>EcCsMojoGateway</b> to get user profile information for DAR submit authorization based upon the user id information provided by the user.
Submit Service Requests	Per user request	<i>Process:</i> EcCsMojoGateway <i>Library:</i> EcCsMojoGateway <i>Classes:</i> EcMjDarSubmitDarProxy, EcMjDarModifyDarProxy, EcCsRetrieveProfileProxy, EcMjDarQueryxARScenesProxy, EcMjECSSbsrvProxy	<i>Process:</i> EcCIWbJdt <i>Class:</i> JDTApplet	The EcCIWbJdt accepts the requests of the user and submits the requests to the <b>EcCsMojoGateway</b> , which in turn sends the requests to the EcSbSubServer, the EcGwDARServer, or the EcMsAcRegUserSrvr.

**Table 4.3-4. WKBCH CSCI (Java DAR Tool) Process Interface Events (3 of 9)**

<b>Event</b>	<b>Event Frequency</b>	<b>Interface</b>	<b>Initiated By</b>	<b>Event Description</b>
Submit ASTER DAR	One per request	<i>Process:</i> EcCsMojoGateway <i>Classes:</i> EcMjDarSubmitDarProxy, EcMjDarModifyDarProxy	<i>Process:</i> EcCIWbJdt <i>Class:</i> JDTApplet	A user submits a request to the <b>EcCsMojoGateway</b> to have ASTER data taken (a data acquisition request or DAR) using the parameters entered into the Java DAR Tool. DAR parameters are required for submittal of DARs as specified in the ASTER GDS IRD/ICD.
Submit ASTER DAR Search	One per set of DAR parameters or DAR ID	<i>Process:</i> EcCsMojoGateway <i>Class:</i> EcMjDarQueryxARScenesProxy	<i>Process:</i> EcCIWbJdt <i>Class:</i> JDTApplet	The EcCIWbJdt process sends, to the <b>EcCsMojoGateway</b> , the request to search the ASTER DAR database by DAR parameters or a specific DAR ID for a scene of interest (to the user) from the ASTER instrument.
Send DAR ID	One per set of DAR parameters	<i>Process:</i> EcCIWbJdt <i>Class:</i> JDTApplet	<i>Process:</i> EcCsMojoGateway <i>Class:</i> EcMjDarQueryxARScenesProxy	As the result of a successfully submitted DAR, the EcCIWbJdt receives a DAR ID from the <b>EcCsMojoGateway</b> . This is a string of characters used to track a DAR. The user receives notification every time data resulting from this DAR is received by the ECS.
Return Session Id	One per user request	<i>Process:</i> EcCIWbJdt <i>Class:</i> JDTApplet	<i>Process:</i> EcCsMojoGateway <i>Class:</i> EcMjDCELoginProxy	The <b>EcCsMojoGateway</b> returns a session id for the user to communicate between the EcCIWbJdt (DAR Tool) and the ASTER GDS via the EcGwDARServer.
Send Subscription Notification	One per subscription submitted	<i>Process:</i> EcCIWbJdt <i>Class:</i> JDTApplet	<i>Process:</i> EcCsMojoGateway <i>Class:</i> EcMjECSSbsrvProxy	The <b>EcCsMojoGateway</b> returns the subscription notification to the EcCIWbJdt for the user.

**Table 4.3-4. WK BCH CSCI (Java DAR Tool) Process Interface Events (4 of 9)**

<b>Event</b>	<b>Event Frequency</b>	<b>Interface</b>	<b>Initiated By</b>	<b>Event Description</b>
Request Subscription	One per notification request	<i>Process:</i> EcSbSubServer <i>Library:</i> EcSbCI <i>Class:</i> EcCISubscription	<i>Process:</i> EcCsMojoGateway <i>Class:</i> EcMjECSSbsrvProxy	The EcCsMojoGateway passes a subscription request to the EcSbSubServer on behalf of a user. This is a request for notification upon a specific event occurring in the system. An example would be subscribing to the insert of a particular granule type. A valid subscription request results in the return of a subscription identifier. The subscription Identifier is not returned to the user.
Notify of Subscription	One per subscription submitted	<i>Process:</i> EcCsMojoGateway <i>Class:</i> EcMjECSSbsrvProxy	<i>Process:</i> EcSbSubServer <i>Library:</i> EcSbSr <i>Classes:</i> EcSbSubscription, EcSbNotification	The EcSbSubServer sends E-mail to the ECS User, Operations Staff (via EcSbGui), or inter-process notification (via the message-passing framework) to the EcCsMojoGateway to notify the user when his/her subscription criteria have been met.
Submit/Modify DAR	One per request to DAR	<i>Process:</i> EcGwDARServer <i>Library:</i> EcGwDAR <i>Classes:</i> EcGwDARSubmitDarRequest_C EcGwDARModifyDarRequest_C	<i>Process:</i> EcCsMojoGateway <i>Library:</i> EcCsMojoGateway <i>Classes:</i> EcMjDarSubmitDarProxy , EcMjDarModifyDarProxy	The EcCsMojoGateway submits the DAR Submit request (and all other DAR related requests) after selecting or modifying DAR parameters to the <b>EcGwDARServer</b> . The EcGwDARServer interfaces directly with the ASTER GDS, and, in the event of a DAR Submit Request, returns a DAR ID to the EcCsMojoGateway. The EcCsMojoGateway, in turn, returns the DAR ID to the EcCIWbJdt. The EcCsMojoGateway handles all ECS service requests from the EcCIWbJdt via proxies.

**Table 4.3-4. WKBCH CSCI (Java DAR Tool) Process Interface Events (5 of 9)**

<b>Event</b>	<b>Event Frequency</b>	<b>Interface</b>	<b>Initiated By</b>	<b>Event Description</b>
Search ASTER DAR Database	One per set of DAR parameters or DAR ID	<i>Process:</i> EcGwDARServer <i>Library:</i> EcGwDAR <i>Class:</i> EcGwDARQueryxARScenesRequest_C	<i>Process:</i> EcCsMojoGateway <i>Library:</i> EcCsMojoGateway <i>Class:</i> EcMjDarQueryxARScenesProxy	The EcCsMojoGateway submits a request to the <b>EcGwDARServer</b> to search the ASTER GDS DAR database for DARs and their respective status (i.e., acquired scenes). Search qualifications may be in the form of DAR parameters or DAR IDs. To get a status of the search, users may view the Search Status via the Java DAR Tool.
Return DAR ID	One per DAR submitted	<i>Process:</i> EcCsMojoGateway <i>Library:</i> EcCsMojoGateway <i>Class:</i> EcMjDarQueryxARScenesProxy	<i>Process:</i> EcGwDARServer <i>Library:</i> EcGwDAR <i>Class:</i> EcGwDARQueryxARScenesRequest_C	As the result of a successfully submitted DAR, the EcCsMojoGateway receives a DAR ID from the EcGwDARServer. The DAR ID is a string of characters used to track a DAR.
Request Management Services (RMS)	One per service request	N/A	N/A	The <b>EcMsAcRegUserSrvr</b> provides a basic management library of services to the processes, implemented as client or server applications, using the DCCI CSCI Process Framework. The basic management library of services includes the items listed below.
RMS (cont.)	One per notice received	<i>Process:</i> EcMsAcRegUserSrvr <i>Library:</i> MsAcCInt <i>Classes:</i> MsAcUsrProfile, RWPportal	<i>Process:</i> EcCsMojoGateway <i>Class:</i> EcCsRetrieveProfileProxy	<b>User Profile Request</b> – The <b>EcMsAcRegUserSrvr</b> provides requesting processes with User Profile parameters such as e-mail and shipping addresses to support their processing activities.

**Table 4.3-4. WKBCH CSCI (Java DAR Tool) Process Interface Events (6 of 9)**

<b>Event</b>	<b>Event Frequency</b>	<b>Interface</b>	<b>Initiated By</b>	<b>Event Description</b>
Return User Profile	One per request	<i>Process:</i> EcCsMojoGateway <i>Class:</i> EcCsRetrieveProfileProxy	<i>Process:</i> EcMsAcRegUserSrvr <i>Library:</i> MsAcCInt <i>Classes:</i> MsAcUsrProfile, RWPortal	The <b>EcMsAcRegUserSrvr</b> returns the user profile to the EcCsMojoGateway.
Export Location Information	Once per session	<i>Process:</i> EcCsIdNameServer <i>Libraries:</i> EcPf, Middleware, FoNs, Folp, oodce <i>Classes:</i> EcPfManagedServer, CCSMdwNameServer, FoNsNameServerProxy, CCSMdwRwNetProxy	<i>Process:</i> EcCsMojoGateway <i>Library:</i> EcCsMojoGateway <i>Class:</i> EcMjManagedSrv	The EcCsMojoGateway sends physical and logical server location information to the <b>EcCsIdNameServer</b> to locate ECS data.
Import Location Information	One per user request	<i>Process:</i> EcCsMojoGateway <i>Library:</i> EcCsMojoGateway <i>Class:</i> EcMjManagedSrv	<i>Process:</i> EcCsIdNameServer <i>Libraries:</i> EcPf, Middleware, FoNs, Folp, oodce <i>Classes:</i> EcPfManagedServer, CCSMdwNameServer, FoNsNameServerProxy, CCSMdwRwNetProxy	The <b>EcCsIdNameServer</b> returns physical and logical server information to the EcCsMojoGateway.

**Table 4.3-4. WKBCH CSCI (Java DAR Tool) Process Interface Events (7 of 9)**

<b>Event</b>	<b>Event Frequency</b>	<b>Interface</b>	<b>Initiated By</b>	<b>Event Description</b>
Request Login	Once per session	<i>Process:</i> Web Browser (COTS)	User	The EcCIWbJdt receives the user name and password from the <b>user</b> via a web browser and requests a user profile from the EcCsMojoGateway to authenticate the user. The CCS NameServer sends back a session id.
Enter DAR Parameters	One set per acquisition	<i>Process:</i> Web Browser (COTS)	User	A <b>user</b> enters parameters (as specified in the Interface Control Document (ICD)) required for submittal or modification of Data Acquisition Requests (DARs) in accordance with the ASTER GDS Interface Requirements Document (IRD). Upon completion of the selection or modification of DAR parameters, the user may submit a DAR. In addition, the user may specify DAR parameters for a search of the DAR database.
Enter Service Requests	Per user request	<i>Process:</i> Web Browser (COTS)	User	A <b>user</b> enters service requests via the web browser.
Request On-Demand Products	Per user request	<i>Process:</i> Web Browser (COTS)	User	A <b>user</b> selects the On-demand Product (ASTER L1B, ASTER DEM, and ASTER higher level) and a processing parameter(s).

**Table 4.3-4. WKBCH CSCI (Java DAR Tool) Process Interface Events (8 of 9)**

Event	Event Frequency	Interface	Initiated By	Event Description
Request ASTER Data Acquisition	Per user request	<i>Process:</i> Web Browser (COTS)	User	A <b>user</b> submits a request via a Web Browser to have ASTER data taken (a data acquisition request or DAR) using the parameters entered into the Java DAR Tool. DAR parameters are required for submittal of DARs as specified in the ASTER GDS IRD/ICD.
Request ASTER DAR Search	Per user request	<i>Process:</i> Web Browser (COTS)	User	A <b>user</b> submits a request via a Web Browser to search the ASTER DAR database by DAR parameters or a specific DAR ID to determine if the ASTER instrument has acquired a scene of interest (to the user).
Send Login Request	One per User	<i>Process:</i> EcCIWbJdt <i>Class:</i> CIoUserLogin	<i>Process:</i> Web Browser (COTS)	The <b>Web Browser</b> sends the user id information (name and password) to the EcCIWbJdt process to obtain a session id to submit data and service requests.
Send DAR Parameters	One set per data acquisition	<i>Process:</i> EcCIWbJdt <i>Class:</i> JDTApplet	<i>Process:</i> Web Browser (COTS)	The <b>Web Browser</b> sends the ASTER DAR parameters to the EcCIWbJdt to get the request processed.
Send Service Requests	Per user request	<i>Process:</i> EcCIWbJdt <i>Class:</i> JDTApplet	<i>Process:</i> Web Browser (COTS)	The <b>Web Browser</b> sends the user service requests to the EcCIWbJdt.
Create DAR	One acquisition at a time	<i>Process:</i> EcCIWbJdt <i>Class:</i> JDTApplet	<i>Process:</i> Web Browser (COTS)	The <b>Web Browser</b> sends the data acquisition request to the EcCIWbJdt.
Send On-Demand Request	One request at a time	<i>Process:</i> EcCIWbJdt <i>Class:</i> JDTApplet	<i>Process:</i> Web Browser (COTS)	The <b>Web Browser</b> sends the ASTER On-Demand requests to the EcCIWbJdt to get the request processed.

**Table 4.3-4. WKBCH CSCI (Java DAR Tool) Process Interface Events (9 of 9)**

Event	Event Frequency	Interface	Initiated By	Event Description
Send ASTER DAR Search	Per user request	<i>Process:</i> EcCIWbJdt <i>Class:</i> JDTApplet	<i>Process:</i> Web Browser (COTS)	A user submits a request via a <b>Web Browser</b> to search the ASTER DAR database by DAR parameters or a specific DAR ID to determine if the ASTER instrument has acquired a scene of interest (to the user).
Receive DAR ID	One per DAR submitted	<i>Process:</i> Web Browser (COTS)  User	<i>Process:</i> EcCIWbJdt <i>Class:</i> JDTApplet	The <b>Web Browser</b> receives the DAR ID from the EcCIWbJdt.
Receive Session Id	One per user session	<i>Process:</i> Web Browser (COTS)  User	<i>Process:</i> EcCIWbJdt <i>Class:</i> JDTApplet	The <b>Web Browser</b> receives the session id from the EcCIWbJdt.
Receive Subscription Notification	One per subscription submitted	<i>Process:</i> Web Browser (COTS)  User	<i>Process:</i> EcCIWbJdt <i>Class:</i> JDTApplet	The <b>Web Browser</b> receives the subscription notification from the EcCIWbJdt. The user receives notification every time data resulting from this DAR is received by the ECS.

#### 4.3.1.6 Workbench Data Stores

Table 4.3-5 provides descriptions of the WKBCH CSCI data storage areas shown on the EOSView and Java DAR Tool Architecture Diagrams. To simplify the table, the list of data stores is limited to the areas shown.

**Table 4.3-5. WKBCH CSCI Data Stores**

Data Store	Type	Functionality
HDF File	File	A listing of the HDF files accessible by EOSView.
Session Data	File	The Java DAR Tool maintains user session data, which includes submitted and in process DARs, search criteria and search results.

#### 4.3.2 ODFRM Software Description


##### 4.3.2.1 ODFRM Functional Overview

The ODFRM is a combination of HTML web pages and CGI programs called from the HTML web pages to communicate with the PLS. The web pages provide an interface to allow users to:

- Create Aster On-demand Product Requests: ASTER L1B, ASTER DEM and ASTER higher-level Products (AST\_04, AST\_05, AST\_06V, AST\_06T, AST\_06S, AST\_07S, AST\_07V, AST\_09T, AST\_09V, AST\_09S, AST08) using the web interface.

#### 4.3.2.2 ODFRM Context

Figure 4.3-5 is the ODFRM CSCI context diagram. The diagram shows the events sent to the ODFRM CSCI and the events the ODFRM CSCI sends to other CSCIs. Table 4.3-6 provides descriptions of the interface events shown in the ODFRM CSCI context diagram.

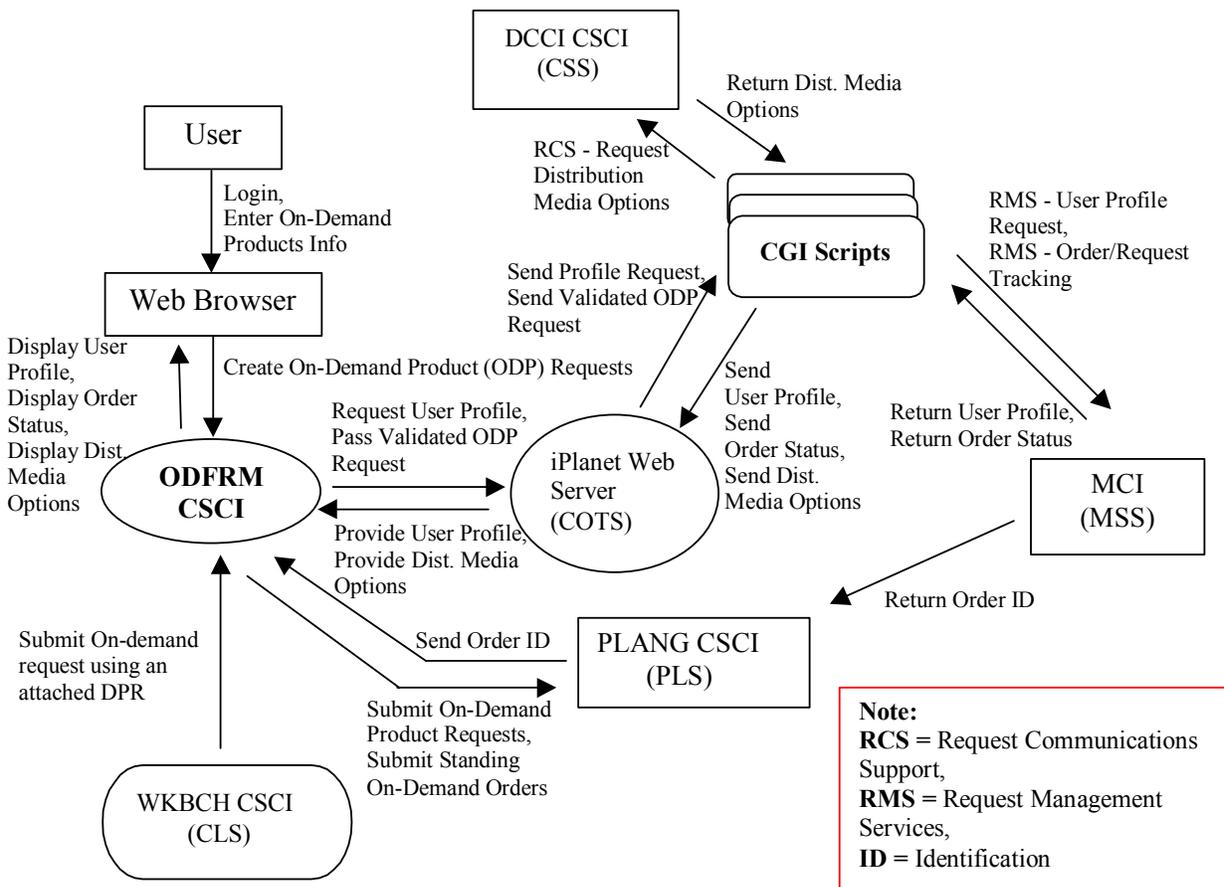

**Figure 4.3-5. ODFRM CSCI Context Diagram**

**Table 4.3-6. ODFRM CSCI Interface Events (1 of 2)**


Event	Interface Event Description
Login	The <b>user</b> logs into the ECS via a Web Browser.
Enter On-Demand Products Info	The <b>user</b> fills in the user information on the Login screen and presses the submit button.
Create On-demand Product (ODP) Requests	The <b>Web Browser</b> creates an On-Demand Processing Request from information supplied by the user and sends the request to the ODFRM CSCI.
Request User Profile	The ODFRM CSCI sends a request to the MSS Sybase SQL Server for a user to use ECS services or access ECS data products via the <b>iPlanet Web Server</b> using a CGI script.
Pass Validated ODP Request	The ODFRM CSCI sends a validated on-demand request to the <b>iPlanet Web Server</b> on behalf of a user for ECS products. The <b>iPlanet Web Server</b> spawns the process EcCIodRequest with the User Login information to pass on the validated on-demand product request.
Send Profile Request	The user profile request is provided to a CGI script via the <b>iPlanet Web Server</b> .
Send Validated ODP Request	The <b>iPlanet Web Server</b> sends a request to a CGI script to access the MSS database. The EcCIodRequest process accesses the MSS database via CGI scripts and sends the user back the authentication.
Request Communications Support	<p>The <b>DCCI CSCI</b> provides a library of services available to each SDPS and CSMS CSCI. The CSCI services required to perform specific assignments are requested from the DCCI CSCI. These services include:</p> <ul style="list-style-type: none"> <li>• CCS Middleware Support</li> <li>• Database Connection Services</li> <li>• Name/Address Services</li> <li>• Server Request Framework (SRF)</li> <li>• Universal Reference (UR)</li> <li>• Error/Event logging</li> <li>• Mode Information</li> <li>• Query Registry - Retrieving the requested configuration attribute-value pairs from the Configuration Registry</li> <li>• Request Distribution Media Options from the Configuration Registry</li> </ul>
Return Dist. Media Options	The options available for distributing the data to be ordered are provided to the CGI script by the <b>DCCI CSCI</b> for return to the user via the Netscape Server, the ODFRM CSCI, and the user's web browser.
Request Management Services	<p>The <b>MCI</b> provides a basic management library of services to the subsystems, implemented as client or server applications, using the DCCI CSCI Process Framework. The basic management library of services includes:</p> <ul style="list-style-type: none"> <li>• <b>User Profile Request</b> - The MCI provides requesting subsystems with User Profile parameters such as e-mail address and shipping address upon request by authorized users to support their processing activities.</li> <li>• <b>Order/Request Tracking</b> - The WK BCH CSCI uses CGI scripts to interface with the MSS Order/Request Tracking service to create and track a user product order and submit the order to the PLANG CSCI.</li> </ul>
Return User Profile	The <b>MCI</b> returns the user profile to the ODFRM CSCI via the CGI script and the iPlanet Web Server.

**Table 4.3-6. ODFRM CSCI Interface Events (2 of 2)**

Event	Interface Event Description
Return Order Status	The ODFRM CSCI receives an order id and status for the requested ECS product from the <b>MCI</b> and returns the order id and status to the user (to track the order) via the CGI script and the iPlanet Web Server.
Send User Profile	The CGI scripts send the user profile to the <b>iPlanet Web Server</b> .
Send Order Status	The CGI scripts send an order id and status for the requested ECS product to the <b>iPlanet Web Server</b> .
Send Dist. Media Options	The CGI scripts send the distribution media options to the <b>iPlanet Web Server</b> .
Provide User Profile	The <b>iPlanet Web Server</b> returns the user profile to the ODFRM CSCI.
Provide Order Status	The <b>iPlanet Web Server</b> returns the status of an order for an ECS product(s) to the ODFRM CSCI.
Provide Dist. Media Options	The <b>iPlanet Web Server</b> returns the distribution media options to the ODFRM CSCI.
Submit On-demand request using an attached DPR	The ODFRM CSCI receives an on-demand request using an attached DPR from the <b>WKBCH CSCI</b> .
Submit On-Demand Product Requests	The ODFRM CSCI sends the request to the <b>PLANG CSCI</b> to be scheduled for processing.
Submit Standing On-Demand Orders	The ODFRM CSCI sends standing on-demand orders to the <b>PLANG CSCI</b> .
Display User Profile	The user profile information is returned from the ODFRM CSCI to the web browser for display.
Display Order Status	The order id and status are returned from the ODFRM CSCI to the web browser for display.
Display Media Options	The distribution media options are returned from the ODFRM CSCI to the web browser for display.

### 4.3.2.3 ODFRM Architecture

Figure 4.3-6 is the ODFRM CSCI architecture diagram. The diagram shows the events sent to the ODFRM CSCI processes and the events the ODFRM CSCI processes send to other processes.

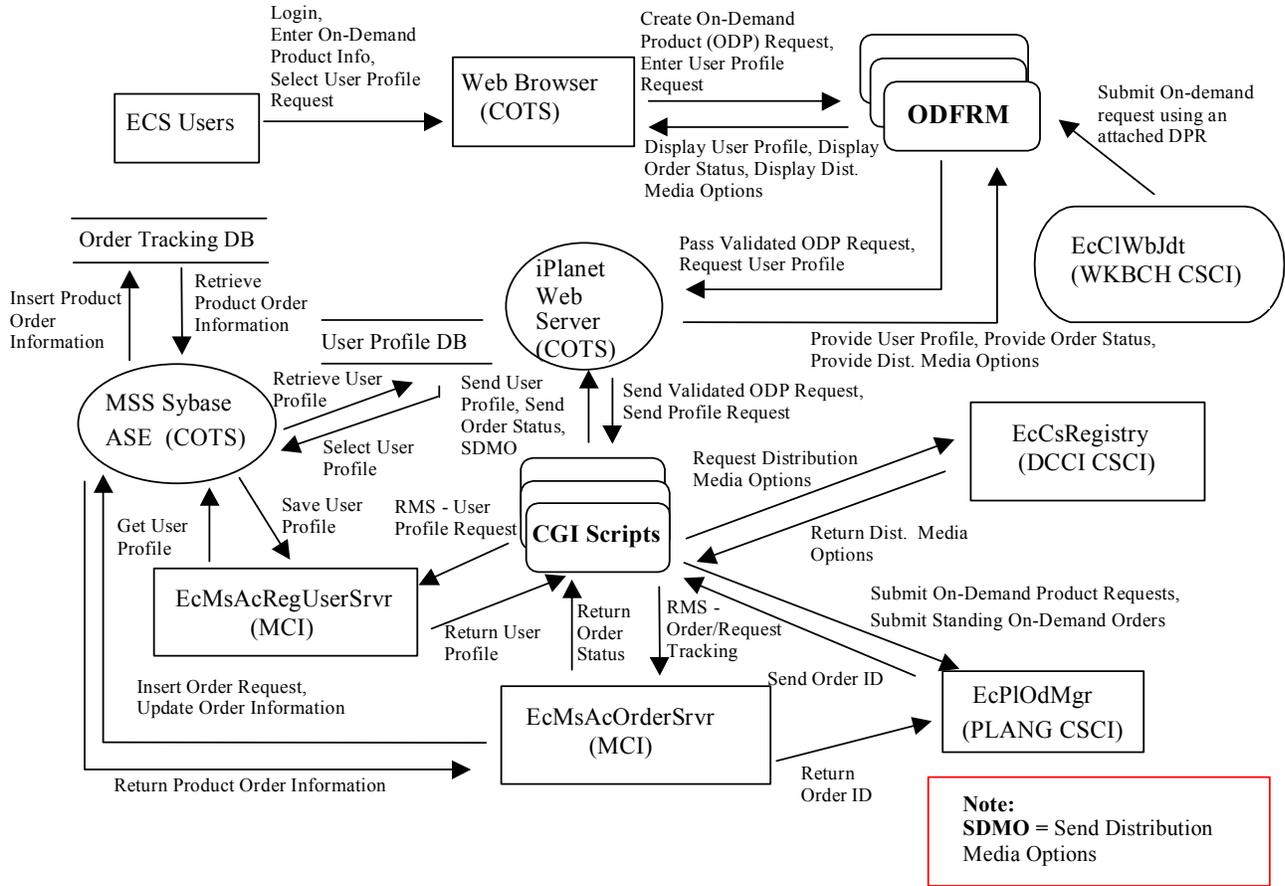

**Figure 4.3-6. ODFRM Architecture Diagram**

#### 4.3.2.4 ODFRM Process Description

Table 4.3-7 provides descriptions of the processes shown in the ODFRM architecture diagram.

**Table 4.3-7. ODFRM Processes**

Process	Type	COTS/ Developed	Functionality
ODFRM	HTML	Developed	<p>The ODFRM user interface uses generic HTML that is accessible via common web browsers (no JAVA involved). This is the CSC that uses the HTML Framework to build the actual HTML files that are viewed by the users using a Web browser.</p> <p>Using this ODFRM:</p> <ol style="list-style-type: none"> <li>1) A user can login to the system to create Aster On-demand Product requests.</li> <li>2) Once the user logs into the system, he can create an On-demand product request and submit it for processing.</li> </ol>
iPlanet Web Server	Server	COTS	<p>The iPlanet Web Server runs at the DAACs and receives and interprets the Hypertext Transport Protocol (HTTP) from the ODFRM web pages. Refer to the Netscape Server administration documentation for further information.</p>
CGI	CGI	Developed	<p>The ODFRM HTML interface communicates with the MSS Database to create On-demand product requests, accessing User Profile Information through the use of CGI programs. After pressing the Submit button on the ODFRM, the CGI program EcCIODRequest is spawned from the iPlanet Web Server.</p> <p>EcCIODRequest CGI Program: This program receives an On-demand product request from the ODFRM (web client) and creates an order with the MSS and sends the request to the PLS for processing.</p>
Sybase ASE	Server	COTS	<p>The Sybase ASE acts as a SQL server for the MSS CSCI (MCI). Refer to the Sybase documentation for details.</p>

#### 4.3.2.5 ODFRM Interface Descriptions

Table 4.3-8 provides descriptions of the interface events shown in the ODFRM architecture diagram.

**Table 4.3-8. ODFRM Process Interface Events (1 of 6)**

<b>Event</b>	<b>Event Frequency</b>	<b>Interface</b>	<b>Initiated By</b>	<b>Event Description</b>
Login	One per session	<i>Process:</i> Web Interface (COTS)	User	The <b>user</b> logs into the ECS via a Web Browser.
Enter On-Demand Product Info	One per user request	<i>Process:</i> Web Interface (COTS)	User	The <b>user</b> fills in the User Information on the Login screen and presses the submit button.
Select User Profile Request	One profile per request	<i>Process:</i> Web Interface (COTS)	User	The <b>user</b> selects a request to obtain a user profile via the Web Browser.
Create On-Demand Product (ODP) Request	One per user request	ODFRM <i>Process:</i> EcCIodProductRequest <i>Library:</i> CIodCommon <i>Class:</i> CIodProductRequest	<i>Process:</i> Web Browser (COTS)	The ODFRM receives the On-Demand product information from the user's <b>web browser</b> and validates the information.
Enter User Profile Request	One per user	ODFRM <i>Process:</i> EcCIodProductRequest <i>Library:</i> CIodCommon <i>Class:</i> CIodProductRequest	<i>Process:</i> Web Browser (COTS)	The ODFRM receives a user profile request to retrieve a user profile for a user to use ECS services or retrieve ECS data products via the <b>web browser</b> .
Display User Profile	One profile per user	<i>Process:</i> Web Browser (COTS)	ODFRM <i>Process:</i> EcCIodProductRequest <i>Library:</i> CIodCommon <i>Class:</i> CIodProductRequest	The user profile information is returned from ODFRM via the <b>web browser</b> for display.
Display Order Status	One order id per request	<i>Process:</i> Web Browser (COTS)	ODFRM <i>Process:</i> EcCIodProductRequest <i>Library:</i> CIodCommon <i>Class:</i> CIodProductRequest	The order id and status are returned from ODFRM via the <b>web browser</b> for display.

**Table 4.3-8. ODFRM Process Interface Events (2 of 6)**

<b>Event</b>	<b>Event Frequency</b>	<b>Interface</b>	<b>Initiated By</b>	<b>Event Description</b>
Display Dist. Media Options	One set of options per request	Process: Web Browser (COTS)	ODFRM <i>Process:</i> EcCIodProductRequest <i>Library:</i> CIodCommon <i>Class:</i> CIodProductRequest	The distribution media options are returned from ODFRM via the <b>web browser</b> for display.
Submit On-demand request using an attached DPR	One per user request	ODFRM <i>Process:</i> EcCIodProductRequest <i>Library:</i> CIodCommon <i>Class:</i> CIodProductRequest	<i>Process:</i> EcCIWbJdt (Java) <i>Libraries:</i> EcCIWbJestCl.jar, jh.jar, EcCIWbJestSv.jar, jaf.jar, javamail.jar <i>Classes:</i> (many: See Appendix C)	The <b>EcCIWbJdt</b> submits a request to the ODFRM for an on-demand request using an attached DPR.
Pass Validated ODP Request	One per user request	<i>Process:</i> iPlanet Web Server (COTS)	ODFRM <i>Process:</i> EcCIodProductRequest <i>Library:</i> CIodCommon <i>Class:</i> CIodProductRequest	The <b>iPlanet Web Server</b> spawns the process EcCIodRequest with the User Login information passed from the ODFRM process.
Request User Profile	One per user	<i>Process:</i> iPlanet Web (COTS)	ODFRM <i>Process:</i> EcCIodProductRequest <i>Library:</i> CIodCommon <i>Class:</i> CIodProductRequest	The EcCIodRequest automatically sends a request to the <b>EcMsAcRegUserSrvr</b> to get the user's profile via the iPlanet Web Server and a CGI script.
Provide User Profile	One profile per user	ODFRM <i>Process:</i> EcCIodProductRequest <i>Library:</i> CIodCommon <i>Class:</i> CIodProductRequest	<i>Process:</i> iPlanet Web Server (COTS)	The <b>iPlanet Web Server</b> returns the user profile to ODFRM.

**Table 4.3-8. ODFRM Process Interface Events (3 of 6)**

<b>Event</b>	<b>Event Frequency</b>	<b>Interface</b>	<b>Initiated By</b>	<b>Event Description</b>
Provide Order Status	One status per request	ODFRM <i>Process:</i> EcCIodProductRequest <i>Library:</i> CIodCommon <i>Class:</i> CIodProductRequest	<i>Process:</i> iPlanet Web Server (COTS)	The <b>iPlanet Web Server</b> returns the order id and status of an order for an ECS product(s) to ODFRM.
Provide Dist. Media Options	One set of distribution options per request	ODFRM <i>Process:</i> EcCIodProductRequest <i>Library:</i> CIodCommon <i>Class:</i> CIodProductRequest	<i>Process:</i> iPlanet Web Server (COTS)	The <b>iPlanet Web Server</b> returns the distribution media options to ODFRM.
Send Validated ODP Request	One per user request	CGI Interface, <i>Process:</i> EcCIodProductRequest <i>Library:</i> CIodCommon <i>Class:</i> CIodProductRequest	iPlanet Web Server (COTS)	The EcCIodRequest process accesses the MSS database using <b>CGI scripts</b> and sends the user back the authentication.
Send Profile Request	One profile per user	CGI Interface, <i>Process:</i> EcCIodProductRequest <i>Library:</i> CIodCommon <i>Class:</i> CIodProductRequest	iPlanet Web Server (COTS)	The user profile request is provided to a CGI script via the <b>iPlanet Web Server</b> .
Request Distribution Media Options	One set per request	<i>Process:</i> EcCsRegistry <i>Library:</i> EcCsRegistry <i>Class:</i> EcRgRegistryServer_C	CGI Interface, CGI scripts	The CGI scripts request the media options available for distribution of an ECS product(s) from the <b>EcCsRegistry</b> .

**Table 4.3-8. ODFRM Process Interface Events (4 of 6)**

<b>Event</b>	<b>Event Frequency</b>	<b>Interface</b>	<b>Initiated By</b>	<b>Event Description</b>
Return Dist. Media Options	One per user request	User	<i>Process:</i> EcCsRegistry <i>Library:</i> EcCsRegistry <i>Class:</i> EcRgRegistryServer_C	The options available for distributing the data to be ordered are provided to the CGI script by the EcCsRegistry for return to the user via the Netscape Server, the ODFRM CSCI, and the user's <b>web browser</b> .
Submit On-demand product requests	One per user	<i>Process:</i> EcPIOdMgr <i>Library:</i> PICore2 <i>Class:</i> PIOdMsgProxy	CGI Interface, <i>Process:</i> EcCIODProductRequest <i>Library:</i> CIODCommon <i>Class:</i> CIODProductRequest	The EcCIODRequest process causes an order to be created in the MSS database and sends the request to the <b>EcPIOdMgr</b> to be scheduled for processing and sends the user back the OrderId.
Submit Standing On-Demand Orders	One per user	<i>Process:</i> EcPIOdMgr <i>Library:</i> PICore2 <i>Class:</i> PIOdMsgProxy	CGI Interface, <i>Process:</i> EcCIODProductRequest <i>Library:</i> CIODCommon <i>Class:</i> CIODProductRequest	The ODFRM sends validated ODP requests to the Netscape Server and a CGI script sends standing on-demand orders to the <b>EcPIOdMgr</b> .
Send Order ID	One per on-demand product request or standing order	CGI Interface, <i>Process:</i> EcCIODProductRequest <i>Library:</i> CIODCommon <i>Class:</i> CIODProductRequest	<i>Process:</i> EcPIOdMgr <i>Library:</i> PIOdMgrClient <i>Class:</i> PIOdMsgProxy	The <b>EcPIOdMgr</b> returns an order id to the CGI Interface to provide to the user to track the order.
Return Order ID	Per order	<i>Process:</i> EcPIOdMgr <i>Library:</i> PICore2	<i>Process:</i> EcMsAcOrderSrvr <i>Libraries:</i> MsAcClnt, MsAcComm	The EcMsAcOrderSrvr sends an order id to the EcPIOdMgr to allow the user to track on-demand product or order requests.

**Table 4.3-8. ODFRM Process Interface Events (5 of 6)**

Event	Event Frequency	Interface	Initiated By	Event Description
Request Management Services (RMS)	One per service request	N/A	N/A	The <b>EcMsAcRegUserSrvr</b> and <b>EcMsAcOrderSrvr</b> provide a basic management library of services to the processes, implemented as client or server applications, using the DCCI CSCI Process Framework. The basic management library of services includes the items listed below.
RMS (cont.)	One per notice received	<i>Process:</i> EcMsAcRegUserSrvr <i>Library:</i> MsAcClnt <i>Classes:</i> MsAcUsrProfile, RWPportal	CGI Interface, CGI scripts	<b>User Profile Request</b> – The <b>EcMsAcRegUserSrvr</b> provides requesting processes with User Profile parameters such as e-mail and shipping addresses to support their processing activities.
RMS (cont.)	One per order request	<i>Process:</i> EcMsAcOrderSrvr <i>Library:</i> MsAcClnt <i>Class:</i> EcAcOrderCMgr	CGI Interface, CGI scripts	<b>Order/Request Tracking</b> - The CLS uses a Server and CGI scripts to interface with the MSS Order/Request Tracking service (using the <b>EcMsAcOrderSrvr</b> ) to create a user product order and submit the order to the PLS.
Return Order Status	One per user request	CGI Interface, CGI scripts	<i>Process:</i> EcMsAcOrderSrvr <i>Library:</i> MsAcClnt <i>Class:</i> EcAcOrderCMgr	The <b>EcMsAcOrderSrvr</b> returns the order id and status to the CGI scripts.
Return User Profile	One per user request	CGI Interface, CGI scripts	<i>Process:</i> EcMsAcRegUserSrvr <i>Library:</i> MsAcClnt <i>Classes:</i> MsAcUsrProfile, RWPportal	The <b>EcMsAcRegUserSrvr</b> returns the user profile to the CGI scripts.

**Table 4.3-8. ODFRM Process Interface Events (6 of 6)**

<b>Event</b>	<b>Event Frequency</b>	<b>Interface</b>	<b>Initiated By</b>	<b>Event Description</b>
Insert Order Request	One per insert order request	Sybase ASE (COTS)	<i>Process:</i> EcMsAcOrderSrvr <i>Libraries:</i> MsAcClnt, MsAcComm	The <b>EcMsAcOrderSrvr</b> submits a request to the MSS Sybase ASE to insert a product order request into the Order Tracking database (DB).
Update Order Information	One per update of order information	Sybase ASE (COTS)	<i>Process:</i> EcMsAcOrderSrvr <i>Libraries:</i> MsAcClnt, MsAcComm	The <b>EcMsAcOrderSrvr</b> submits a request to the MSS Sybase ASE to update order information in the Order Tracking database (DB).
Return Product Order Information	One per user request	<i>Process:</i> EcMsAcOrderSrvr <i>Libraries:</i> MsAcClnt, MsAcComm	Sybase ASE (COTS)	The <b>Sybase ASE</b> returns the requested order information to the EcMsAcOrderSrvr.
Get User Profile	One per user request	MSS Sybase ASE (COTS)	<i>Process:</i> EcMsAcRegUserSrvr <i>Libraries:</i> MsAcClnt, MsAcComm	The <b>EcMsAcRegUserSrvr</b> sends a request to the Sybase ASE to get a user profile for a user to use ECS services or retrieve ECS data products.
Save User Profile	One per user request	<i>Process:</i> EcMsAcRegUserSrvr <i>Libraries:</i> MsAcClnt, MsAcComm	MSS Sybase ASE (COTS)	The MSS <b>Sybase ASE</b> returns the user profile to the EcMsAcRegUserSrvr.
Select User Profile	One per user request	User Profile DB	MSS Sybase ASE (COTS)	The MSS <b>Sybase ASE</b> retrieves the requested profile information.
Retrieve User Profile	One per user request	<i>Process:</i> EcMsAcRegUserSrvr <i>Libraries:</i> MsAcClnt, MsAcComm	<i>Process:</i> Sybase ASE (COTS)	The MSS <b>Sybase ASE</b> sends the user profile information to the EcMsAcRegUserSrvr.
Insert Product Order Information	One per order request	<i>Data Store:</i> Order Tracking DB	<i>Process:</i> Sybase ASE (COTS)	The MSS <b>Sybase ASE</b> inserts product order information in the Order Tracking DB.

Retrieve Product Order Information	One per order request	<i>Data Store:</i> Order Tracking DB	<i>Process:</i> Sybase ASE (COTS)	The MSS <b>Sybase ASE</b> retrieves product order information from the Order Tracking DB.
------------------------------------	-----------------------	---	--------------------------------------	---

#### 4.3.2.6 ODFRM Data Stores

Table 4.3-9 provides descriptions of the data stores shown in the ODFRM architecture diagram.

**Table 4.3-9. ODFRM Data Stores**

Data Store	Type	Functionality
User Profile DB	Database	The User Profile DB contains requests for user registration and also profile information including mailing addresses, e-mail address, and project affiliations of approved registered users.
Order Tracking DB	Database	The Order Tracking DB contains product orders and user requests with the associated current processing status.


### 4.3.3 Desktop Software Description

#### 4.3.3.1 Desktop Functional Overview

The DESKT CSCI provides the User Profile Gateway server to communicate with the MSS User Registration Server for obtaining user profile information to authenticate users or update user information.

#### 4.3.3.2 Desktop Context

Figure 4.3-7 is the DESKT CSCI context diagram. The diagram shows the events sent to the DESKT CSCI and events the DESKT CSCI sends to other CSCIs. Table 4.3-10 provides descriptions of the interface events shown in the DESKT CSCI context diagram.

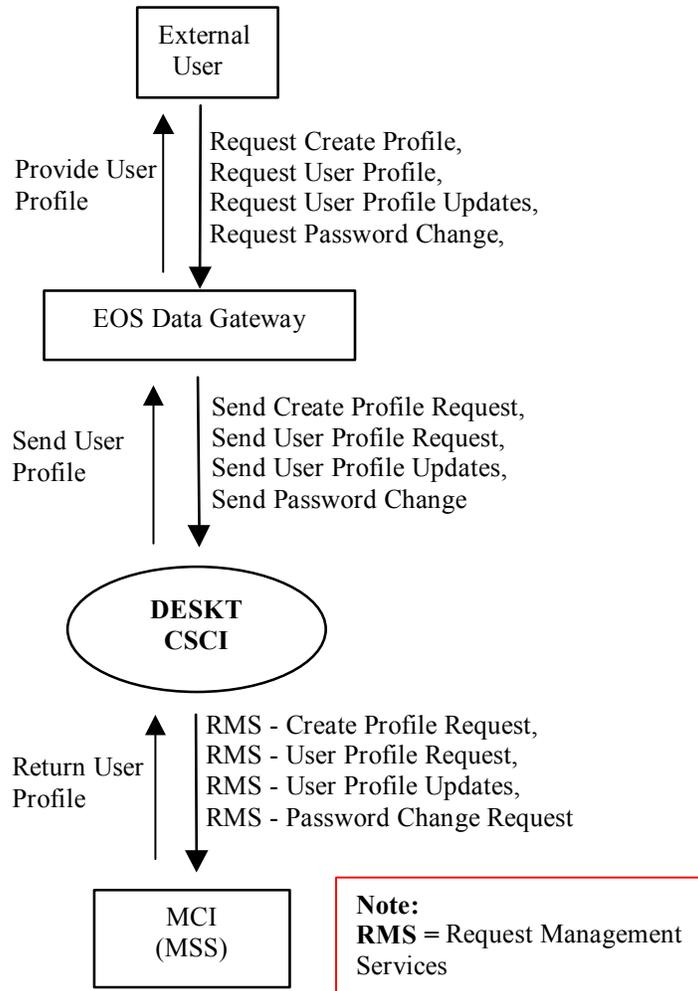

**Figure 4.3-7. DESKT CSCI Context Diagram**


**Table 4.3-10. DESKT CSCI Interface Events**

Event	Interface Event Description
Request Create Profile	A <b>user</b> submits a request to be a registered user of the ECS to the EOS Data Gateway (to forward to the MCI) to create a user profile. The user profile includes, but is not limited to, mailing, billing and shipping contact information.
Request User Profile	The <b>user</b> sends a request to the EOS Data Gateway (to the MCI) for retrieval of a User Profile. The user profile is the important information about a user that must be maintained. This includes, but is not limited to, mailing, billing, and shipping addresses, phone number, and electronic mail address.
Request User Profile Updates	<b>Users</b> can update their User Profile information through the EOS Data Gateway (EDG). This includes their addresses (user, shipping, billing, and e-mail) and other information. This file gets forwarded to the DESKT CSCI and the DESKT CSCI forwards the file to the MCI.
Request Password Change	The <b>user</b> can request a change or reset of his/her EDG/ECS User Profile passwords through the EOS DATA Gateway. The user enters his userid, current and new passwords. The userid and passwords are converted to authenticators. This information is used to change the EDG password and the authenticators (old and new) are forwarded through the CLS to the MSS. The MSS changes the ECS authenticator. The authenticator is an encrypted version of the userid and password. It is encrypted so it can be passed over a socket without threat of being stolen.
Send Create Profile Request	The <b>EOS Data Gateway</b> sends a request to the DESKT CSCI to register the user in the ECS.
Send User Profile Request	The <b>EOS Data Gateway</b> sends the user profile request to the DESKT CSCI for processing.
Send User Profile Updates	The <b>EOS Data Gateway</b> sends the user profile updates to the DESKT CSCI for processing.
Send Password Change	The <b>EOS Data Gateway</b> sends a request to the DESKT CSCI to change or reset the user's password in the ECS for user access.
Request Management Services	<p>The <b>MCI</b> provides a basic management library of services to the CSCIs, implemented as client or server applications, using the DCCI CSCI Process Framework. The basic management library of services includes:</p> <ul style="list-style-type: none"> <li>• <b>Create Profile Request</b> – The MCI receives user information for becoming a registered user of the ECS from the DESKT CSCI. The MCI sends a response to the user when the request is received.</li> <li>• <b>User Profile Request</b> – The MCI provides requesting CSCIs with User Profile parameters such as e-mail address and shipping address upon request by authorized users to support their processing activities.</li> <li>• <b>User Profile Updates</b> – The MCI receives user profile parameter updates from a user and makes the updates in the user profile database.</li> <li>• <b>Password Change Request</b> – The DESKT CSCI sends requests on behalf of ECS users to the MCI to change or reset users' authenticators in the MSS database.</li> </ul>
Return User Profile	The MSS Sybase ASE returns the user profile to the DESKT CSCI, via the <b>MCI</b> , to forward back to the user via the EOS Data Gateway.
Send User Profile	The DESKT CSCI returns the user profile to the <b>EOS Data Gateway</b> .
Provide User Profile	The EOS Data Gateway provides the user profile to the external user.

### 4.3.3.3 Desktop Architecture

Figure 4.3-8 is the DESKT CSCI architecture diagram. The diagram shows the events sent to the DESKT CSCI processes and the events the DESKT CSCI processes send to other processes.

The DESKT CSCI consists of one process. This process is the User Profile Gateway, a server that listens for calls on a socket. This process resides inside the DAAC on the INTHW-1 server.

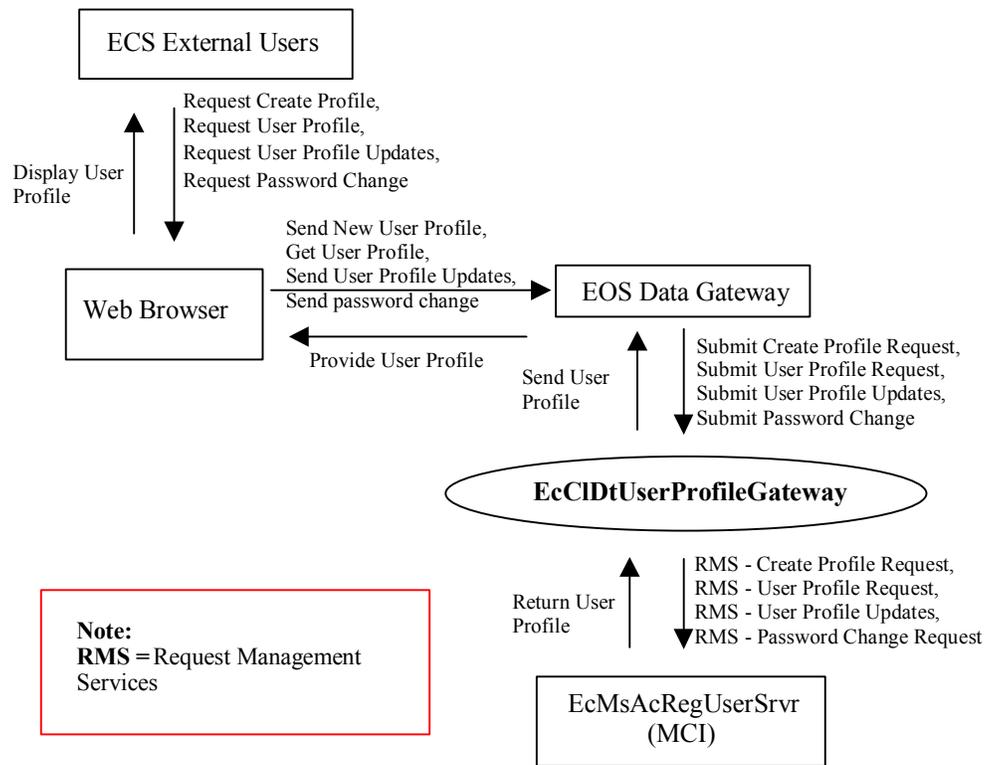

**Figure 4.3-8. DESKT CSCI Architecture Diagram**

### 4.3.3.4 Desktop Process Description

Table 4.3-11 provides descriptions of the processes shown in the DESKT CSCI architecture diagram.

**Table 4.3-11. DESKT CSCI Processes**

Process	Type	COTS/ Developed	Functionality
EcCIDtUserProfileGateway	Server	Developed	<p>The User Profile Gateway is a retrieval and update engine for the user profile information. The server listens for calls on a socket.</p> <p>Interfaces:</p> <ul style="list-style-type: none"> <li>• User Profile Request: Request for a user profile given the user's authenticator.</li> <li>• Profile Update Request: Request to update the user's profile with new information.</li> </ul> <p>Server Supports:</p> <ul style="list-style-type: none"> <li>• Multiple concurrent requests.</li> </ul>

#### 4.3.3.5 Desktop Process Interface Descriptions

Table 4.3-12 provides descriptions of the interface events shown in the DESKT CSCI architecture diagram.

**Table 4.3-12. DESKT CSCI Process Interface Events (1 of 4)**

Event	Event Frequency	Interface	Initiated By	Event Description
Request Create Profile	Once per User	<i>Process:</i> Web Browser (COTS)	User	This is a request by a user to register (establish an account) in the ECS.
Request User Profile	One per User Login	<i>Process:</i> Web Browser (COTS)	User	The <b>user</b> sends a request to the EcMsAcRegUserSrvr using the ECS Authenticator from the EcCIDtUserProfileGateway or the user's ID.
Request User Profile Updates	One per User Profile update	<i>Process:</i> Web Browser (COTS)	User	<b>Users</b> can update their profiles via the Web Browser through the EOS Data Gateway.
Request Password Change	One per password change	<i>Process:</i> Web Browser (COTS)	User	<b>Users</b> can update or reset their passwords via the Web Browser through the EOS Data Gateway.
Send New User Profile	Once per User	<i>Process:</i> EOS Data Gateway	<i>Process:</i> Web Browser (COTS)	The Web Browser sends the User Registration request to the EOS Data Gateway for submittal to the ECS.
Get User Profile	One per User Profile	<i>Process:</i> EOS Data Gateway	<i>Process:</i> Web Browser (COTS)	The Web Browser sends the request to obtain a profile to the <b>EOS Data Gateway</b> .

**Table 4.3-12. DESKT CSCI Process Interface Events (2 of 4)**

<b>Event</b>	<b>Event Frequency</b>	<b>Interface</b>	<b>Initiated By</b>	<b>Event Description</b>
Send User Profile Updates	One set of parameters per request	<i>Process:</i> EOS Data Gateway	<i>Process:</i> Web Browser (COTS)	The Web Browser sends a request to update profile information to the <b>EOS Data Gateway</b> . This interface to the EcCIDtUserProfileGateway requests an update to the user's profile.
Send Password Change	Once per password change	<i>Process:</i> EOS Data Gateway	<i>Process:</i> Web Browser (COTS)	The Web Browser sends a password change or reset request to the <b>EOS Data Gateway</b> to be processed within the ECS.
Submit Create Profile Request	Once per User	<i>Process:</i> EcCIDtUserProfileGateway <i>Class:</i> CIDtProfileServer	<i>Process:</i> EOS Data Gateway	The EOS Data Gateway submits the request to register a user to the EcCIDtUserProfileGateway and ultimately processed by the EcMsAcRegUserSrvr within the MSS.
Submit User Profile Request	One per user request	<i>Process:</i> EcCIDtUserProfileGateway <i>Class:</i> CIDtProfileServer	<i>Process:</i> EOS Data Gateway	The <b>EOS Data Gateway</b> submits the request to obtain a profile to the EcCIDtUserProfileGateway and ultimately processed by the EcMsAcRegUserSrvr.
Submit User Profile Updates	One set of parameters per request	<i>Process:</i> EcCIDtUserProfileGateway <i>Class:</i> CIDtProfileServer	<i>Process:</i> EOS Data Gateway	The <b>EOS Data Gateway</b> submits the request to update a profile to the EcCIDtUserProfileGateway and ultimately processed by the EcMsAcRegUserSrvr.
Submit Password Change	Once per password change	<i>Process:</i> EcCIDtUserProfileGateway <i>Class:</i> CIDtProfileServer	<i>Process:</i> EOS Data Gateway	The <b>EOS Data Gateway</b> submits the request to change or reset a password to the EcCIDtUserProfileGateway, which is ultimately processed by the EcMsAcRegUserSrvr.

**Table 4.3-12. DESKT CSCI Process Interface Events (3 of 4)**

<b>Event</b>	<b>Event Frequency</b>	<b>Interface</b>	<b>Initiated By</b>	<b>Event Description</b>
Request Management Services (RMS)	One per service request	N/A	N/A	The <b>EcMsAcRegUserSrvr</b> provides a basic management library of services to the processes, implemented as client or server applications, using the DCCI CSCI Process Framework. The basic management library of services includes the items listed below.
RMS (cont.)	One per user request	<i>Process:</i> EcMsAcRegUserSrvr <i>Library:</i> MsAcCInt <i>Classes:</i> MsAcUsrProfile, RWPPortal	<i>Process:</i> EcCIDtUserProfileGateway <i>Class:</i> CIDtProfileServer	<b>User Profile Request</b> – The <b>EcMsAcRegUserSrvr</b> provides requesting processes with User Profile parameters such as e-mail and shipping addresses to support their processing activities.
RMS (cont.)	One set of parameters per user request	<i>Process:</i> EcMsAcRegUserSrvr <i>Library:</i> MsAcCInt <i>Classes:</i> MsAcUsrProfile, RWPPortal	<i>Process:</i> EcCIDtUserProfileGateway <i>Class:</i> CIDtProfileServer	<b>User Profile Updates</b> – The <b>EcMsAcRegUserSrvr</b> provides requesting processes with access to User Profile parameters such as e-mail and shipping addresses to support the update of the parameters.
RMS (cont.)	One set of parameters per user request	<i>Process:</i> EcMsAcRegUserSrvr <i>Library:</i> MsAcCInt <i>Classes:</i> MsAcUsrProfile, RWPPortal	<i>Process:</i> EcCIDtUserProfileGateway <i>Class:</i> CIDtProfileServer	<b>Password Change Request</b> – The EcCIDtUserProfileGateway sends requests on behalf of ECS users to the <b>EcMsAcRegUserSrvr</b> to change or reset a user's password in the MSS database. The password is represented as an authenticator in the MSS database.

**Table 4.3-12. DESKT CSCI Process Interface Events (4 of 4)**

<b>Event</b>	<b>Event Frequency</b>	<b>Interface</b>	<b>Initiated By</b>	<b>Event Description</b>
Return User Profile	One per user request	<i>Process:</i> EcCIDtUserProfile Gateway <i>Class:</i> CIDtProfileServer	<i>Process:</i> EcMsAcRegUserSrvr <i>Library:</i> MsAcClnt <i>Classes:</i> MsAcUsrProfile, RWPportal	The <b>EcMsAcRegUserSrvr</b> returns the user profile to the EcCIDtUserProfileGateway.
Send User Profile	One per user request	<i>Process:</i> EOS Data Gateway	The EcCIDtUserProfile Gateway forwards the user profile to the EOS Data Gateway	The EcCIDtUserProfile Gateway forwards the user profile to the <b>EOS Data Gateway</b> .
Provide User Profile	One per user request	<i>Process:</i> Web Browser (COTS)	<i>Process:</i> EOS Data Gateway	The EOS Data Gateway returns the profile information to the Web Browser.
Display User Profile	One per user request	External Users	<i>Process:</i> Web Browser (COTS)	The Web Browser displays the user profile information to the external users.

#### **4.3.3.6 Desktop Data Stores**

There are no data stores used by the DESKT CSCI.

## 4.4 Data Management Subsystem Overview

The Data Management Subsystem (DMS) provides catalog interoperability between the Version 0 (V0) Information Management System (IMS) and the ECS. The DMS provides this service by supplying gateway processes. There is a dedicated gateway process for each external catalog interoperability direction.


The DMS provides protocol translation via the dedicated gateways. The DMS provides content translation via a data dictionary of data collection information. This data dictionary contains collection level metadata in addition to attribute and keyword mappings between the ECS and the external catalog systems.

The V0 EOS Data Gateway (V0 Web Client) marshals the ECS interface to the V0-IMS. Documentation for the V0 Web Client can be found at the following Universal Resource Locator:


<http://harp.gsfc.nasa.gov/~imswww/pub/manuals/imsdesign.html>.

### Data Management Subsystem Context


Figure 4.4-1 is the Data Management Subsystem context diagrams. The diagrams show the events sent to the Data Management Subsystem and the events the Data Management Subsystem sends to other SDPS and CSMS subsystems. Table 4.4-1 provides descriptions of the interface events shown in the Data Management Subsystem context diagrams.

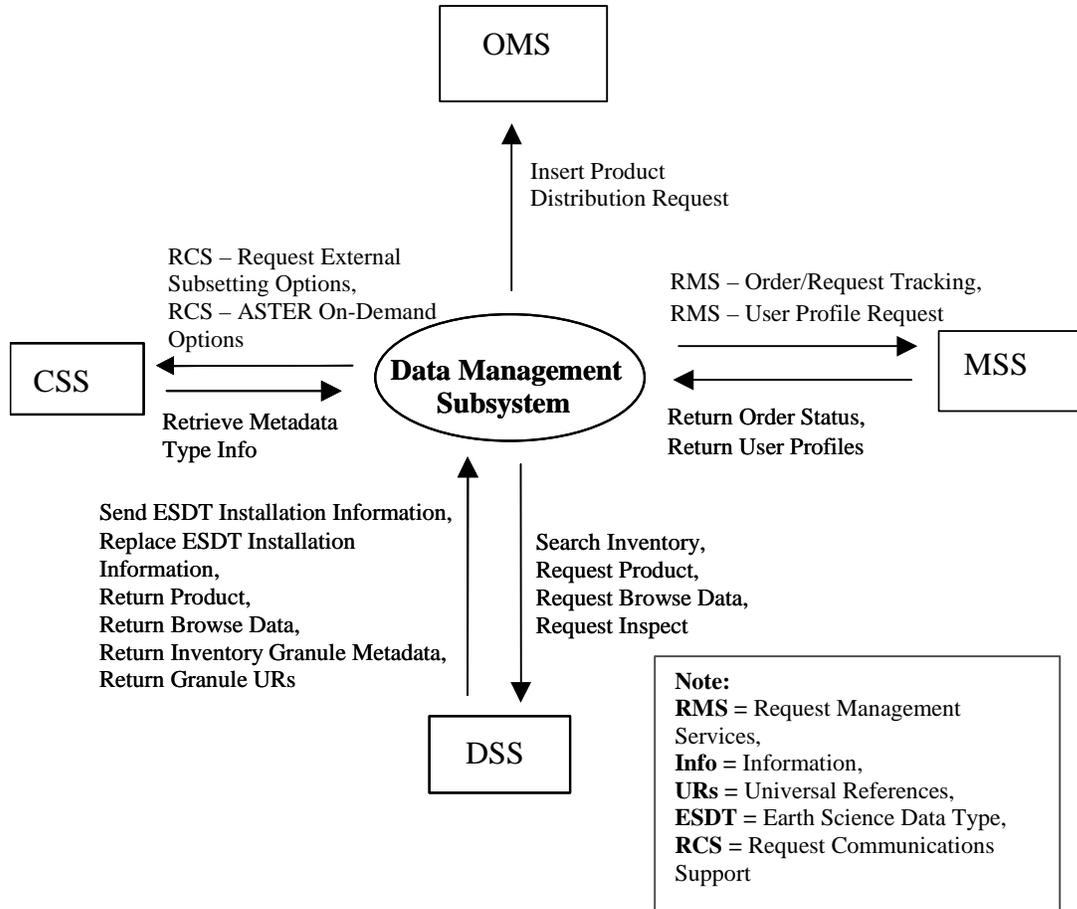

**Figure 4.4-1. Data Management Subsystem Context Diagram**

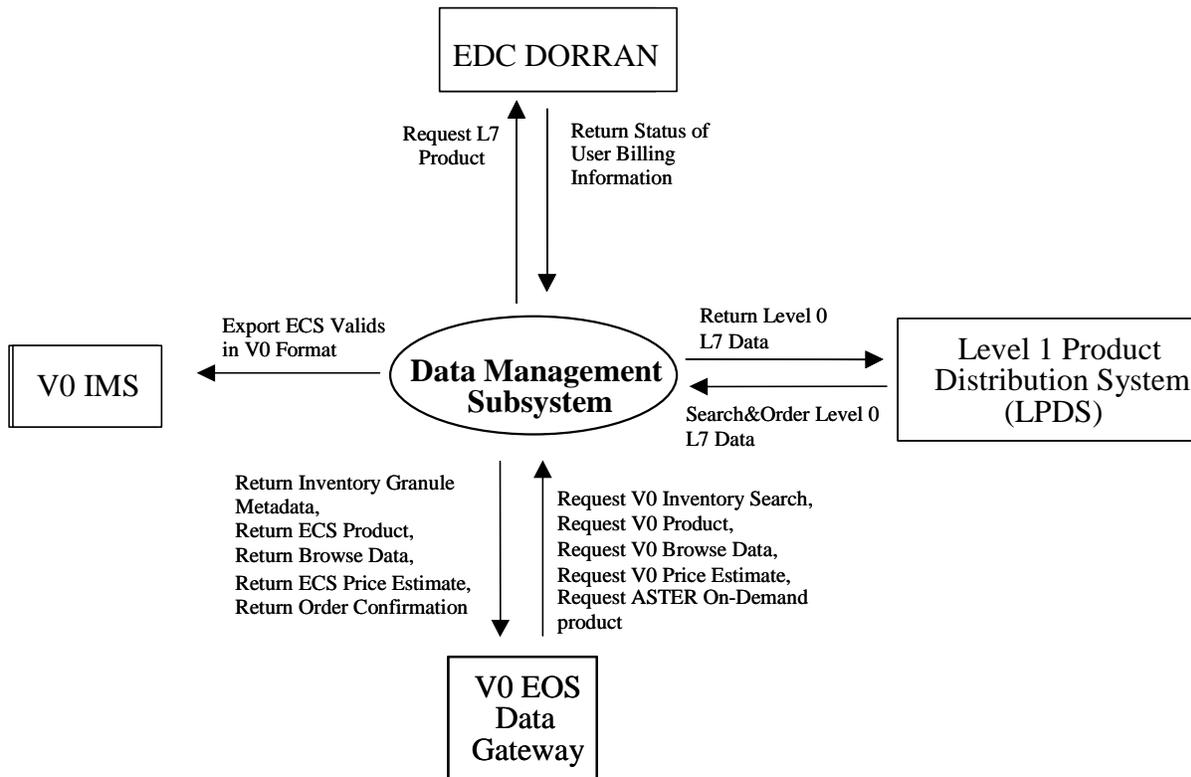

**Figure 4.4-1. Data Management Subsystem Context Diagram (cont.)**

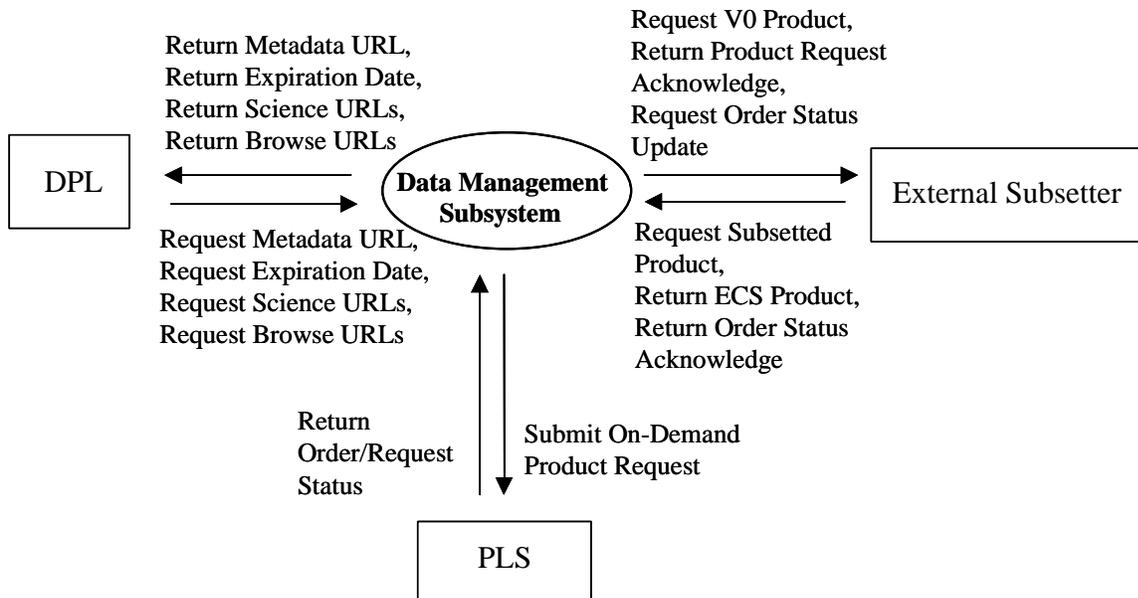

**Figure 4.4-1. Data Management Subsystem Context Diagram (cont.)**

**Table 4.4-1. Data Management Subsystem Interface Events (1 of 3)**

Event	Interface Event Description
Insert Product Distribution Request	The Data Management Subsystem (DMS) inserts product distribution requests in the Order Manager Data Base Management System within the <b>Order Manager Subsystem (OMS)</b> .
Request Management Services	<p>The <b>MSS</b> provides a basic management library of services to the subsystems, implemented as client or server applications, using the CSS Process Framework. The basic management library of services include:</p> <ul style="list-style-type: none"> <li>• <b>System startup and shutdown</b> - Please refer to the release-related, current version of the Mission Operations Procedures for the ECS Project document (611) and the current ECS Project Training Material document (625), identified in Section 2.2.1 of this document.</li> </ul> <p>The MSS also interfaces with other subsystems to perform the following:</p> <ul style="list-style-type: none"> <li>• <b>Order/Request Tracking</b> - The DMS interfaces with the <b>MSS</b> Order/Request tracking service to create and track a user product order.</li> <li>• <b>User Profile Request</b> - The <b>MSS</b> provides requesting subsystems with User Profile parameters such as e-mail address and shipping address to support their processing activities.</li> </ul>
Return Order Status	The <b>MSS</b> provides order ids and order status information for products requested by users.
Return User Profiles	The <b>MSS</b> returns user profile information requested by users or ECS processes.
Search Inventory	The DMS submits inventory search requests to the Science Data Server within the <b>DSS</b> .
Request Product	The DMS submits the product requests to the <b>DSS</b> to acquire data granules.
Request Browse Data	The DMS submits the browse requests to the <b>DSS</b> to obtain browse data to determine the type of product to order.
Request Inspect	The DMS sends a request for an inspection of granule metadata to the <b>DSS</b> in support of a price estimate request.
Send ESDT Installation Information	The <b>DSS</b> inserts new collection level information into the DMS Data Dictionary database as new Earth Science Data Types (ESDTs) are added to the SDPS.
Replace ESDT Installation Information	The <b>DSS</b> sends updated ESDT information to the DMS Data Dictionary whenever an ESDT is updated. This data consists of updated Inventory and Collection level metadata.
Return Product	The DMS receives products (including Landsat 7 data archived within the ECS) from the <b>DSS</b> based upon a product request. The ASTER GDS can only receive Landsat 7 fixed scenes because they do not have the means to handle floating scenes.
Return Browse Data	The DMS receives browse data associated with a particular granule from the <b>DSS</b> .
Return Inventory Granule Metadata	The DMS receives the granule metadata identifying the scene within the granule based on an inventory search request from the <b>DSS</b> .
Return Granule URs	The DMS receives Earth Science Data Type (ESDT) Universal References (URs) for the requested granules from the <b>DSS</b> .
Retrieve Metadata Type Info	The <b>CSS</b> retrieves type information for qualifying metadata specified in a SIPS search request from the DMS.

**Table 4.4-1. Data Management Subsystem Interface Events (2 of 3)**

Event	Interface Event Description
Request Communications Support	<p>The <b>CSS</b> provides a library of services available to each SDPS and CSMS subsystems. The subsystem services required to perform specific assignments are requested from the CSS. These services include:</p> <ul style="list-style-type: none"> <li>• CCS Middleware Support</li> <li>• Database Connection Services</li> <li>• Name/Address Services</li> <li>• Password Services</li> <li>• Server Request Framework (SRF)</li> <li>• Universal Reference (UR)</li> <li>• Error/Event Logging</li> <li>• Fault Handling Services</li> <li>• Mode Information</li> <li>• Query Registry - Retrieving the requested configuration attribute-value pairs from the Configuration Registry</li> <li>• Request Distribution Media Options from the Configuration Registry</li> <li>• Request External Subsetting Options from the Configuration Registry</li> <li>• Request ASTER On-Demand Options from the Configuration Registry</li> </ul>
Request L7 Product	<p>The DMS submits the Landsat 7 product requests provided by users to the <b>EDC DORRAN Billing and Accounting System</b> and to the DSS. The EDC DORRAN Billing and Accounting System approves and tracks Landsat 7 orders. The DSS retrieves Landsat 7 products from the archives.</p>
Return Status of User Billing Information	<p>The <b>DORRAN Billing and Accounting System</b> returns the status of the user billing information to the DMS to allow or deny the user access to ECS data and services.</p>
Return Level 0 L7 Data	<p>The DMS sends Level 0 data to the <b>Level 1 Product Distribution System (LPDS)</b> upon request. The LPDS creates Level 1 products from the Landsat Level 0 data ordered through the V0 Gateway upon user request and sends the Level 1 data to the user.</p>
Search&Order Level 0 L7 Data	<p>The <b>LPDS</b> sends requests for L7 Level 0 data from the ECS to produce and distribute Landsat 7 Level 1 products upon user request.</p>
Return Inventory Granule Metadata	<p>The DMS returns the inventory granule metadata identifying the scene within the granule based on an inventory search request to the user via the <b>V0 EOS Data Gateway</b>.</p>
Request V0 Inventory Search	<p>The DMS receives inventory search requests from the <b>V0 EOS Data Gateway (EDG)</b> on behalf of an external ECS user.</p>
Request V0 Product	<p>The DMS receives product requests from the <b>V0 EOS Data Gateway</b> and <b>External Subsetter</b> on behalf of an external ECS user.</p>
Request V0 Browse Data	<p>The DMS receives browse data requests from the <b>V0 EOS Data Gateway</b> on behalf of an external ECS user.</p>
Request V0 Price Estimate	<p>The user sends a price estimate request for an ECS product to the DMS via the <b>V0 EOS Data Gateway</b>.</p>
Request Aster On-Demand Product	<p>The DMS receives product requests for ASTER On-Demand products from the <b>V0 EOS Data Gateway</b>.</p>

**Table 4.4-1. Data Management Subsystem Interface Events (3 of 3)**

Event	Interface Event Description
Return ECS Product	The DMS returns ECS data (including Landsat 7 data archived within the ECS) to the user via the <b>V0 EOS Data Gateway</b> based upon a product request. The ASTER GDS can only receive Landsat 7 fixed scenes because they do not have the means to handle floating scenes.
Return Browse Data	The DMS returns Browse data associated with a particular granule to the user via the <b>V0 EOS Data Gateway</b> .
Return ECS Price Estimate	The DMS returns a price estimate for a price estimate request to the user via the <b>V0 EOS Data Gateway</b> .
Return Order Confirmation	The <b>V0 EOS Data Gateway</b> receives order confirmation of an ASTER On-Demand request from the DMS.
Export ECS Valid in V0 Format	The DMS sends the valids with the ECS core and PSA Attributes to the <b>V0 IMS</b> .
Return Product Request Acknowledge	The DMS receives confirmation of a subsetted request from an <b>External Subsetter</b> .
Request Order Status Update	The DMS receives order status update requests provided by <b>External Subsetters</b> and submits the update to MSS
Request Subsetted Product	The DMS receives product requests for subsetted products and sends requests for the products to be provided by an <b>External Subsetter</b> .
Return Order Status Acknowledge	The DMS returns confirmation of an order status update request to the <b>External Subsetter</b> .
Submit On-Demand Product Request	The <b>PLS</b> receives product requests from the DMS for ASTER On-Demand products.
Return Order/Request Status	The <b>PLS</b> returns the product request status to the DMS.
Request Metadata URL	The DMS retrieves Metadata URLs for granules from the <b>Data Pool Sybase ASE</b> .
Request Expiration Date	The DMS retrieves Expiration Dates for granules from the <b>Data Pool Sybase ASE</b> .
Request Science URLs	The DMS retrieves Science URL(s) for granules from the <b>Data Pool Sybase ASE</b> .
Request Browse URLs	The DMS retrieves Browse URL(s) for granules from the <b>Data Pool Sybase ASE</b> .
Return Metadata URLs	The <b>Data Pool Sybase ASE</b> returns Metadata URLs to the DMS.
Return Expiration date	The <b>Data Pool Sybase ASE</b> returns Expiration Dates to the DMS.
Return Science URLs	The <b>Data Pool Sybase ASE</b> returns zero or more Science URL(s) to the DMS.
Return Browse URLs	The <b>Data Pool Sybase ASE</b> returns zero or more Browse URL(s) to the DMS.

## Data Management Subsystem Structure

The DMS is two CSCIs and one Hardware Configuration Item (HWCI):

- The Data Dictionary (DDICT) is a software configuration item. DDICT manages the definitions of data collections including the metadata, data domains (valid values), and data location. The Data Dictionary information is stored persistently in a Relational Database Management System (DBMS).
- The Version 0 Gateway (V0 GTWAY) is a software configuration item. The V0 GTWAY CSCI provides access to data and services between the SDSRV CSCI and the V0 IMS. V0 GTWAY services include inventory searches; requests for browse data, product requests, and price estimate requests.
- The DMS hardware comprises one hardware configuration item Data Management Hardware (DMGHW) CI and one hardware configuration item. DMGHW provides the servers and workstations needed for all data management functions. The DMGHW provides processing and storage for the DDICT and V0 GTWAY CSCIs.

## Use of COTS in the Data Management Subsystem

**Note: The following RogueWave Libraries are currently delivered with custom code as static libraries. A separate installation of dynamic libraries is no longer required.**

- RogueWave's Tools.h++

The Tools.h++ class libraries are used by the DMS to provide basic functions and objects such as strings and collections.

- RogueWave's DBTools.h++

The DBTools.h++ C++ class libraries are used to interact with the Sybase database Structured Query Language (SQL) server. The use of DBTools buffers the DMS processes from the relational database used.

Other COTS products are also utilized to support the Data Management Subsystem.

- The ICS Builder Xcessory GUI

The Builder Xcessory GUI builder tool modifies the displays of the Data Dictionary Maintenance Tool (Mtool). The builder tool also generates the C++ code to produce the Mtool displays at run time. There is no operational component of Builder Xcessory needed at run-time.

- Sybase Adaptive Server Enterprise (ASE)

Sybase's ASE provides access for the Data Dictionary to insert, update, and delete Data Dictionary database information. The Sybase ASE must be running during operations for the Data Dictionary Server to execute, search, and update requests on the Data Dictionary database.

- CCS Middleware Client

CCS Middleware Client provides DMS with communications between other subsystems. CCS Middleware can reside on one or both sides of the interface. An instance must be installed on the platform where DMS resides. Although the CCS Middleware Client is part of CSS, this COTS software item must be installed for DMS to run in the SDPS operational and test environment.

## **Error Handling and processing**

EcUtStatus is a class used throughout the ECS custom code for general error reporting. It is almost always used as a return value for functions and allows detailed error codes to be passed back up function stacks.

The DDICT and V0 GTWAY CSCIs use two main mechanisms for error handling.

### 1. Return EcUtStatus values

Functions can return an EcUtStatus object, indicating success, failure or other detailed status, which corresponds to EcUtStatus:OK, EcUtStatus:FAILED and EcUtStatus:DETAILED.

For V0ToEcsGateway, the EcUtStatus values are reflected on the EDG to indicate the search or order status.

### 2. Exceptions

Some functions (e.g., a main function) cannot return EcUtStatus values to indicate success or failure. These functions can catch some exceptions after a try block.

All error messages are sent to the ALOG file or debug log file.

For writing messages to the Applications Log (ALOG), the following functions are used:

EcLgLogError sends a message to the ALOG at severity level 1. For example, EcLgLogError("Error" , 0,"Failed to get Order ID from MSS. TransactionID=%s.",

```
myTransactionId.data());
```

EcLgLogInformational sends a message to the ALOG at severity level 3. For example, EcLgLogInformational ("DmGwManagedServer", 0, "Server Shutdown");

For writing messages to the debug log, the following macros are used:

PF\_STATUS writes a message at a "log level" of 1 to the debug log. For example, PF\_STATUS cerr << "Unable to create inputNonAggregate " << endl;

PF\_VERBOSE writes a message at a "log level" of 2 to the debug log. For example, PF\_VERBOSE cerr << "~~~ Connect to Science Data Server FAILED."

PF\_DEBUG writes a message at a "log level" of 3 to the debug log. For example, PF\_DEBUG cerr << "~~~ Failed to get Order ID from MSS." << endl;

#### **4.4.1 Data Dictionary Software Description**

##### **4.4.1.1 Data Dictionary Functional Overview**


The Data Dictionary (DDICT) CSCI provides access to the Data Dictionary database containing information about science data collections, data attributes, data operations, and the domain(s) of the attributes. The DDICT CSCI describes the data objects accessible through Data Servers and the Gateways. The DDICT CSCI provides information support for users to retrieve definitions of the available items and provides infrastructure support to the other CSCIs within the DMS.

The Information contained within the Data Dictionary database includes all collections known within the SDPS. Clients (other SDPS or CSMS CSCIs, CSCs, or processes) of the Data Dictionary obtain data collection information by sending queries to the Data Dictionary. Mappings between the SDPS and the V0 IMS attributes and keywords are also maintained within the Data Dictionary. These mappings are used to translate requests between the V0 IMS and the ECS.


The location of a data collection within a data server at a particular site is also stored within the data dictionary. This information allows users to perform queries through user software such as the V0 EOS Data Gateway from any geographical location to forward inventory search, browse, and acquire requests to the appropriate Data Server or Gateway located at the site where the data is physically stored.

##### **4.4.1.2 Data Dictionary Context**

Figure 4.4-2 is the DDICT CSCI context diagrams. The diagrams show the events sent to other CSCIs or CSCs and the events the DDICT CSCI receives from other CSCIs and CSCs. Table 4.4-2 provides descriptions of the interface events shown in the DDICT CSCI context diagrams.

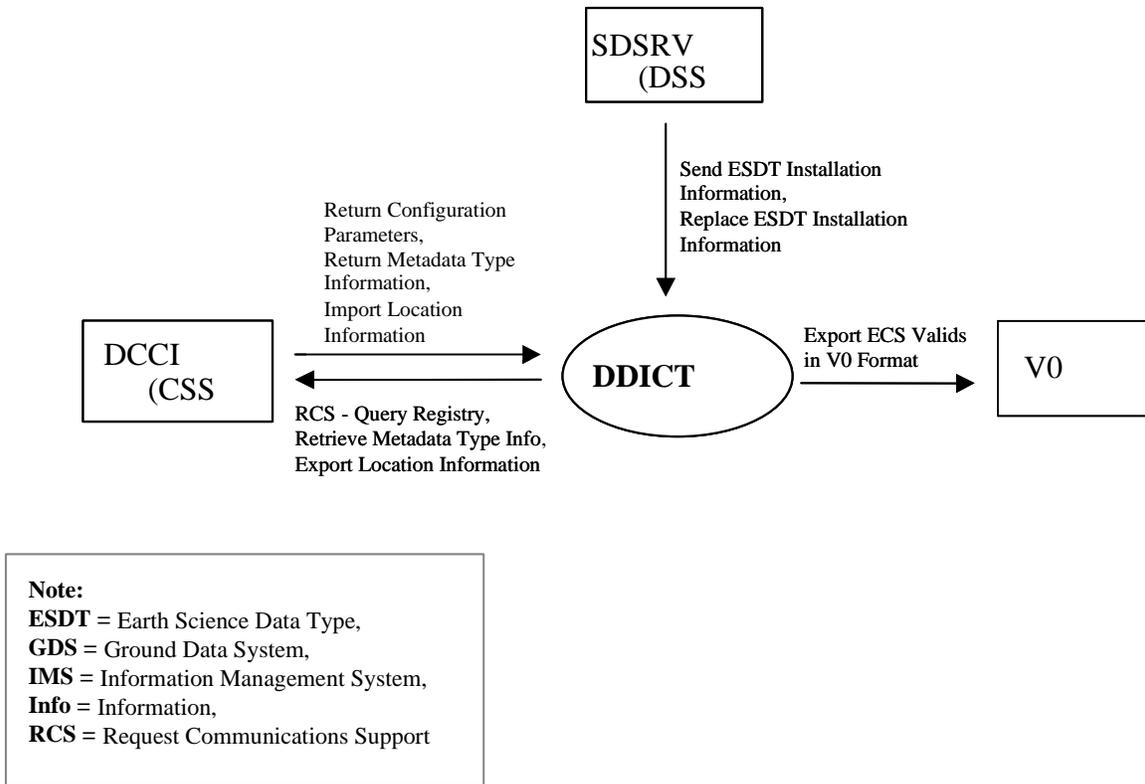

**Figure 4.4-2. Data Dictionary CSCI Context Diagram**

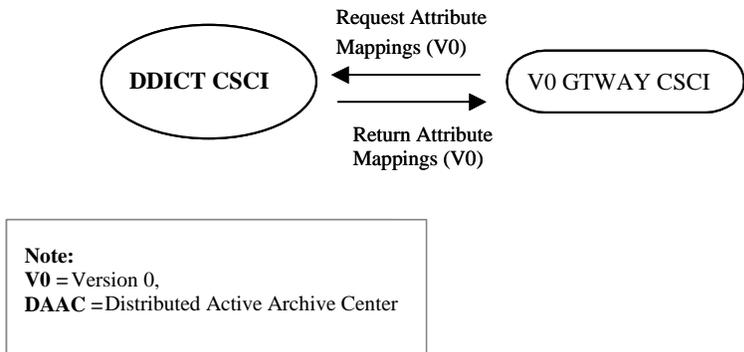

**Figure 4.4-2. Data Dictionary CSCI Context Diagram (cont.)**


**Table 4.4-2. Data Dictionary CSCI Interface Events**

Event	Interface Event Description
Request Management Services	<b>System startup and shutdown</b> – Please refer to the release-related, current version of the Mission Operations Procedures for the ECS Project document (611) and the current ECS Project Training Material document (625), identified in Section 2.2.1 of this document.
Send ESDT Installation Information	The <b>SDSRV CSCI</b> inserts new collection level information into the DMS Data Dictionary database via the DDICT CSCI, as new Earth Science Data Types (ESDTs) are added to the SDPS.
Replace ESDT Installation Information	The <b>SDSRV CSCI</b> sends updated ESDT information to the DDICT CSCI whenever an ESDT is updated. This data consists of Inventory and Collection level metadata. The updated information replaces the ESDT information in the DDICT CSCI.
Request Communications Support	The <b>DCCI CSCI</b> provides a library of services available to each SDPS and CSMS CSCI. The CSCI services required to perform specific assignments are requested from the DCCI CSCI. These services include: <ul style="list-style-type: none"> <li>• CCS Middleware Support</li> <li>• Database Connection Services</li> <li>• Name/Address Services</li> <li>• Password Services</li> <li>• Server Request Framework (SRF)</li> <li>• Universal Reference (UR)</li> <li>• Error/Event Logging</li> <li>• Fault Handling Services</li> <li>• Mode Information</li> <li>• Query Registry – Retrieving the requested configuration attribute-value pairs from the Configuration Registry</li> </ul>
Retrieve Metadata Type Info	The <b>DCCI CSCI</b> retrieves metadata type information from the DDICT CSCI pertaining to search or search & order requests from the SIPS.
Export Location Information	The DDICT CSCI stores physical and logical information in the <b>CCS NameServer</b> .
Return Configuration Parameters	The DDICT CSCI receives the configuration parameters and associated values from the Registry Server within the <b>DCCI CSCI</b> .
Return Metadata Type Info	The <b>DCCI CSCI</b> receives metadata type information from the <b>DDICT CSCI</b> .
Import Location Information	The DDICT CSCI requests server location information from the <b>CCS NameServer</b> .
Request Attribute Mappings (V0)	A user, via the EOS Data Gateway within the V0 IMS, requests data collection attribute and keyword mappings (via the <b>V0 GTWAY CSCI</b> ) from the DDICT CSCI to translate requests from the V0 IMS to the ECS and back again.
Return Attribute Mappings (V0)	The DDICT CSCI returns the data collection attribute and keyword mappings requested by the user via the <b>V0 GTWAY CSCI</b> .

### 4.4.1.3 Data Dictionary Architecture

Figure 4.4-3 is the DDICT CSCI architecture diagram. The diagram shows the events sent to the DDICT CSCI processes and the events the DDICT CSCI processes send to other processes.

The DDICT CSCI is two SDPS processes, the Data Dictionary Server (EcDmDictServer) and the Data Dictionary Maintenance Tool (EcDmDdMaintenanceTool) and a COTS process (the Sybase ASE). The Data Dictionary Server, Maintenance Tool, and Sybase ASE processes reside inside a DAAC and run on the DMGHW. The Data Dictionary uses one data store per DAAC, the EcDmDictServer Database, as shown in Figure 4.4-3.

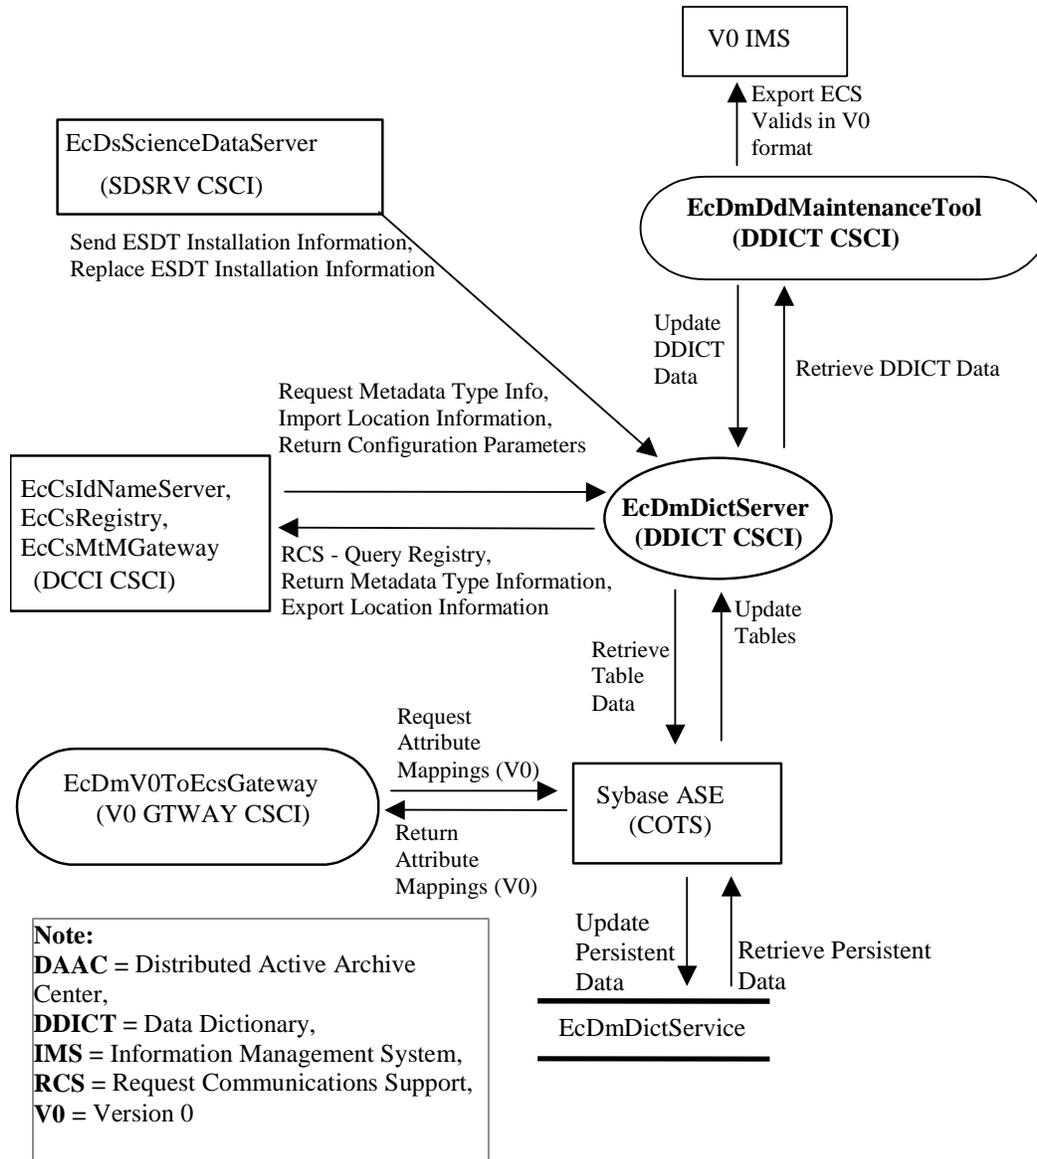

**Figure 4.4-3. Data Dictionary CSCI Architecture Diagram**

#### 4.4.1.4 Data Dictionary Process Descriptions

Table 4.4-3 provides descriptions of the processes shown in the Data Dictionary CSCI architecture diagram.

**Table 4.4-3. Data Dictionary CSCI Processes**

Process	Type	COTS/ Developed	Functionality
EcDmDictServer	Server	Developed	<p>The Data Dictionary Service is the primary server interface to collection and collection related information for the DMS and other subsystems. It allows DDICT client processes the capability to perform data searches, insertions, updates, or deletions to the collection information held in the DDICT database.</p> <p>The Data Dictionary offers two basic interfaces            DDICT Data Search: The Data Dictionary Server allows a user to specify search requests on the Data Dictionary database using a GIParameter List.            DDICT Data Insert and Delete: Provides a client process with the capability to insert and delete data within the Data Dictionary database.</p> <p>The Data Dictionary Service supports:            Single requests at a time            Synchronous request processing            Asynchronous request processing</p>
EcDmDdMaintenanceTool	GUI	Developed	<p>Provides a graphical user interface (GUI) to insert, update, or delete schema information held in the DDICT database, allowing DAAC operations staff to maintain the data stored in the Data Dictionary database. The Data Dictionary Maintenance Tool also provides the following capabilities:            Import and Export of Valid: The tool allows DAAC operations staff to import and export data collection attribute valids to and from ECS, and V0 IMS for catalog interoperability.            Data Collection Attribute and Keyword Mapping: Allows DAAC operations staff to map data collection attributes and keyword valids from ECS to V0 IMS. The V0 GTWAY CSCI process (EcDmV0ToEcsGateway) that translates requests from ECS to V0 IMS uses this information.</p>
Sybase ASE	Server	COTS	<p>The Sybase ASE acts as a SQL server for the Data Dictionary, and is only run at the DAACs by DAAC operations staff. Refer to Sybase documentation for details.</p>

#### 4.4.1.5 Data Dictionary Process Interface Descriptions

Table 4.4-4 provides descriptions of the interface events shown in the Data Dictionary CSCI architecture diagram.

**Table 4.4-4. Data Dictionary CSCI Process Interface Events (1 of 5)**

Event	Event Frequency	Interface	Initiated By	Event Description
Request Management Services	At system startup or shutdown and for restarts	<i>Process:</i> EcDmDictServer	DAAC unique startup scripts	<b>System startup and shutdown</b> - Please refer to the release-related, current version of the Mission Operations Procedures for the ECS Project document (611) and the current ECS Project Training Material document (625), identified in Section 2.2.1 of this document.
Export ECS Valid in V0 Format	Based on V0 valids processing cycle ~ once per week	V0 IMS Host	DAAC Operations Staff <i>Process:</i> EcDmDdMaintenanceTool <i>Classes:</i> DmLmDbiUtils, DmDdMtMainWindow	The DAAC Operations Staff pushes the valids file, using the FTP service, manually to its destination location agreed upon earlier on a <b>V0 IMS</b> Host.
Retrieve DDICT data	One per Maintenance Tool search	<i>Process:</i> EcDmDdMaintenanceTool <i>Classes:</i> DmDdMtDBExtract, DmDdMtMainWindow	<i>Process:</i> EcDmDictServer <i>Library:</i> EcDmDdClient <i>Class:</i> DmDdCIRequest	The EcDmDictServer returns data collection information including collection lists, and collection attributes and keyword valids to the <b>EcDmDdMaintenanceTool</b> .
Update DDICT data	One per table information update	<i>Process:</i> EcDmDictServer <i>Library:</i> EcDmDdClient <i>Class:</i> DmDdCISchemaRequest	Operations Staff <i>Process:</i> EcDmDdMaintenanceTool <i>Classes:</i> DmLmDbiUtils, DmDdMtMainWindow	The Operations Staff, using the <b>EcDmDdMaintenanceTool</b> , updates table information within the DDICT database (via the EcDmDictServer) including mapping collection attributes to keywords and mapping collections to information managers and adding, modifying, and deleting SDPS Core Attributes.

**Table 4.4-4. Data Dictionary CSCI Process Interface Events (2 of 5)**

Event	Event Frequency	Interface	Initiated By	Event Description
Update Tables	One per database update	<i>Process:</i> Sybase ASE (COTS SW) RWDBTools.h++ classes	<i>Process:</i> EcDmDictServer <i>Library:</i> DmDdReqProc <i>Classes:</i> DmDdMapper, DmDdProcMsg	The EcDmDictServer receives updated data from the Data Dictionary database once the <b>Sybase ASE</b> inserts and deletes collections and collection metadata, attributes and keywords, and attribute and keyword mappings.
Retrieve Persistent Data	One per set number of queries	<i>Process:</i> Sybase ASE (COTS)	<i>Data Base Table:</i> EcDmDictService	The <b>Sybase ASE</b> retrieves data persistently stored on disk(s) based on search queries from the EcDmDictServer.
Update Persistent Data	One per set number of queries	<i>Data Base Table:</i> EcDmDictService	<i>Process:</i> Sybase ASE (COTS)	The <b>Sybase ASE</b> updates data persistently stored on disk(s) based on queries from the EcDmDictServer.
Request Attribute Mappings (V0)	One per request from V0 Gateway	<i>Process:</i> EcDmDictServer <i>COTS SW</i> <i>Library:</i> RWDBTools.h++ <i>Library:</i> DmLmDbi <i>Class:</i> DmLmIntQuery	<i>Process:</i> EcDmV0ToEcsGateway <i>Library:</i> Persistent <i>Class:</i> DmGwAttributeMap	The <b>EcDmV0ToEcsGateway</b> requests data collection attribute and keyword mappings from the <b>EcDmDictServer</b> Data Dictionary database, via the Sybase ASE, to translate requests from the V0 IMS to the SDPS and back again.
Return Attribute Mappings (V0)	One per request	<i>Process:</i> EcDmV0ToEcsGateway <i>Library:</i> Persistent <i>Class:</i> DmGwAttributeMap	<i>Process:</i> EcDmDictServer <i>COTS SW</i> <i>Library:</i> RWDBTools.h++ <i>Library:</i> DmLmDbi <i>Class:</i> DmLmIntQuery	The <b>EcDmDictServer</b> Data Dictionary database, via the Sybase ASE, returns the data collection attribute and keyword mappings requested by the user to the <b>EcDmV0ToEcsGateway</b> .
Retrieve Table Data	One per retrieve from the database	<i>Process:</i> Sybase ASE (COTS SW) RWDBTools.h++ classes	<i>Process:</i> EcDmDictServer <i>Library:</i> DmDdServerJit <i>Class:</i> DmDdSearchRequest	The EcDmDictServer requests data (such as collections and collection metadata, attributes and keywords, and attribute and keyword mappings) from the Data Dictionary database within the <b>Sybase ASE</b> .

**Table 4.4-4. Data Dictionary CSCI Process Interface Events (3 of 5)**

Event	Event Frequency	Interface	Initiated By	Event Description
Request Communications Support	Request service(s) as required	<p><b>Process:</b> EcCsIdNameServer</p> <p><b>Libraries:</b> EcPf, Middleware, FoNs, Folp, oodce</p> <p><b>Classes:</b> EcPfManagedServer, CCSMdwNameServer, FoNsNameServerProxy, CCSMdwRwNetProxy</p> <p><b>Library (Common):</b> EcUr <b>Class:</b> EcUrServerUR</p> <p><b>Library:</b> event <b>Class:</b> EcLgErrorMsg</p> <p><b>Process:</b> EcCsRegistry</p> <p><b>Library:</b> EcCsRegistry <b>Class:</b> EcRgRegistryServer_C</p>	<p><b>Process:</b> EcDmDictServer</p> <p><b>Libraries:</b> EcDmDdClient, DmDdReqProc, DmDdServerJit</p> <p><b>Classes:</b> DmDdCISchemaRequest, DmDdCIRequest, DmDdMapper, DmDdProcMsg, DmDdSearchRequest</p>	<p>The <b>DCCI CSCI</b> provides a library of services available to each SDPS and CSMS process. The process services required to perform specific assignments are requested from the DCCI CSCI CSCs. These services include:</p> <ul style="list-style-type: none"> <li>• CCS Middleware Support</li> <li>• Database Connection Services</li> <li>• Name/Address Services</li> <li>• Password Services</li> <li>• Server Request Framework (SRF)</li> <li>• Universal Reference (UR)</li> <li>• Error/Event Logging</li> <li>• Fault Handling Services</li> <li>• Mode Information</li> <li>• Query Registry - Retrieving the requested configuration attribute-value pairs from the Configuration Registry</li> </ul>

**Table 4.4-4. Data Dictionary CSCI Process Interface Events (4 of 5)**

Event	Event Frequency	Interface	Initiated By	Event Description
Return Metadata Type Info	Per search or order request	<i>Process:</i> EcCsMtMGateway <i>Class:</i> EcCsMtMAttributeDict	<i>Processes:</i> EcCsMtMGateway, EcDmDictServer <i>Libraries:</i> DmAsGwCommon, Common, DmGwV0Util, EcDmDdClient, DmDdMsg <i>Class:</i> DmDdCIRequestServer	The EcCsMtMGateway receives metadata type information from the <b>EcDmDictServer</b> .
Export Location Information	Once at system startup and after each failure recovery	<i>Process:</i> EcCsIdNameServer <i>Libraries:</i> EcPf, Middleware, FoNs, Folp, oodce <i>Classes:</i> EcPfManagedServer, CCSMdwNameServer, FoNsNameServerProxy, CCSMdwRwNetProxy	<i>Process:</i> EcDmDictServer <i>Library:</i> EcDmDdClient <i>Class:</i> DmDdCIRequest	The EcDmDictServer stores physical and logical location information in the <b>EcCsIdNameServer</b> .
Request Metadata Type Info	One or more client request	<i>Processes:</i> EcCsMtMGateway, EcDmDictServer <i>Libraries:</i> DmAsGwCommon, Common, DmGwV0Util, EcDmDdClient, DmDdMsg <i>Class:</i> DmDdCIRequestServer	<i>Process:</i> EcCsMtMGateway <i>Class:</i> EcCsMtMAttributeDict	The EcCsMtMGateway requests metadata type information from the <b>EcDmDictServer</b> based upon the qualifying metadata contained in the requests sent by the SIPS via CCS Middleware calls.

**Table 4.4-4. Data Dictionary CSCI Process Interface Events (5 of 5)**

Event	Event Frequency	Interface	Initiated By	Event Description
Import Location Information	As required for processing	<i>Process:</i> EcDmDictServer <i>Libraries:</i> EcDmDdClient, DmDdReqProc, DmDdServerJit <i>Classes:</i> DmDdCISchemaRequest, DmDdCIRequest, DmDdMapper, DmDdProcMsg, DmDdSearchRequest	<i>Process:</i> EcCsIdNameServer <i>Libraries:</i> EcPf, Middleware, FoNs, Folp, oodce <i>Classes:</i> EcPfManagedServer, CCSMdwNameServer, FoNsNameServerProxy, CCSMdwRwNetProxy	The EcDmDictServer requests server location information from the <b>EcCsIdNameServer</b> .
Return Configuration Parameters	One set per request	<i>Process:</i> EcDmDictServer <i>Library:</i> DmDdServerLib <i>Class:</i> DmDdManagedServer	<i>Process:</i> EcCsRegistry <i>Library:</i> EcCsRegistry <i>Class:</i> EcRgRegistryServer_C	The <b>EcCsRegistry</b> returns the attribute-value pairs (configuration parameters) to the EcDmDictServer upon request.
Send ESDT Installation Information	One per new ESDT added to ECS	<i>Process:</i> EcDmDictServer <i>Library:</i> EcDmDdClient <i>Class:</i> DmDdCISchemaRequest	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsDe1 <i>Class:</i> DsDeDataDictController	The <b>EcDsScienceDataServer</b> inserts new collection information into the DMS Data Dictionary database when new Earth Science Data Types (ESDTs) are added to the SDPS.
Replace ESDT Installation Information	One per ESDT update	<i>Process:</i> EcDmDictServer <i>Library:</i> EcDmDdClient <i>Class:</i> DmDdCISchemaRequest	<i>Process:</i> EcDsScienceDataServer <i>Class:</i> DsDeDataDictController	The <b>EcDsScienceDataServer</b> sends updated ESDT information to the EcDmDictServer whenever an ESDT is updated. This data consists of updated Inventory and Collection level metadata.

#### 4.4.1.6 Data Dictionary CSCI Data Stores

Table 4.4-5 provides descriptions of the data stores shown in the Data Dictionary CSCI architecture diagram.

**Table 4.4-5. Data Dictionary CSCI Data Stores**

Data Store	Type	Functionality
EcDmDictService	Database	<p>The Data Dictionary database, EcDmDictService is a Sybase relational database that persistently stores the collection and collection related information on a physical disk medium.</p> <p>Data stores in the Data Dictionary database include:</p> <ul style="list-style-type: none"> <li>• Collection Types: A list of all the data types within the ECS.</li> <li>• Collection Metadata: Various types of collection metadata including instrument, platform, sensor, topic, keyword, temporal and spatial data.</li> <li>• Collection Attributes and Keywords: Attributes and keywords associated with collections originating within and outside the ECS.</li> <li>• Collection Attribute and Keyword Mappings: Associations between the V0 IMS attributes and valid keywords and the ECS attributes and keywords are maintained.</li> <li>• Collection to Information Manager Mappings: Associations between the information manager and the ECS collections stored within them are maintained.</li> </ul>

#### 4.4.2 V0 Gateway Software Description

##### 4.4.2.1 V0 Gateway Functional Overview


The Version 0 Gateway (V0 GTWAY) CSCI provides interoperability with the V0 Information Management System for inventory searches, browse requests, product orders, and price estimate requests.

The V0 GTWAY CSCI is one process, the V0 to ECS Gateway server. Queries are passed between the V0 IMS and the V0 Gateway processes using the Object Description Language (ODL) format. The structure of the V0 ODL messages is documented in “Interface Control Definition for the EOS Data Gateway (EDG) Messages and Development Data Dictionary” (423-42-06).


Since the V0 IMS uses different attributes to describe data collections within its data archive, the V0 GTWAY CSCI translates those attributes as defined in the SDPS. To perform the translation, the V0 Gateway uses the data collection attribute and valid keyword mapping information contained within the Data Dictionary database to translate the V0 attributes into equivalent SDPS attributes.

#### 4.4.2.2 V0 Gateway Context


Figure 4.4-4 is the V0 GTWAY CSCI context diagrams. The diagrams show the events sent to the V0 GTWAY CSCI and the events the V0 GTWAY CSCI sends to other CSCIs. Table 4.4-6 provides descriptions of the interface events shown in the V0 GTWAY CSCI context diagrams.

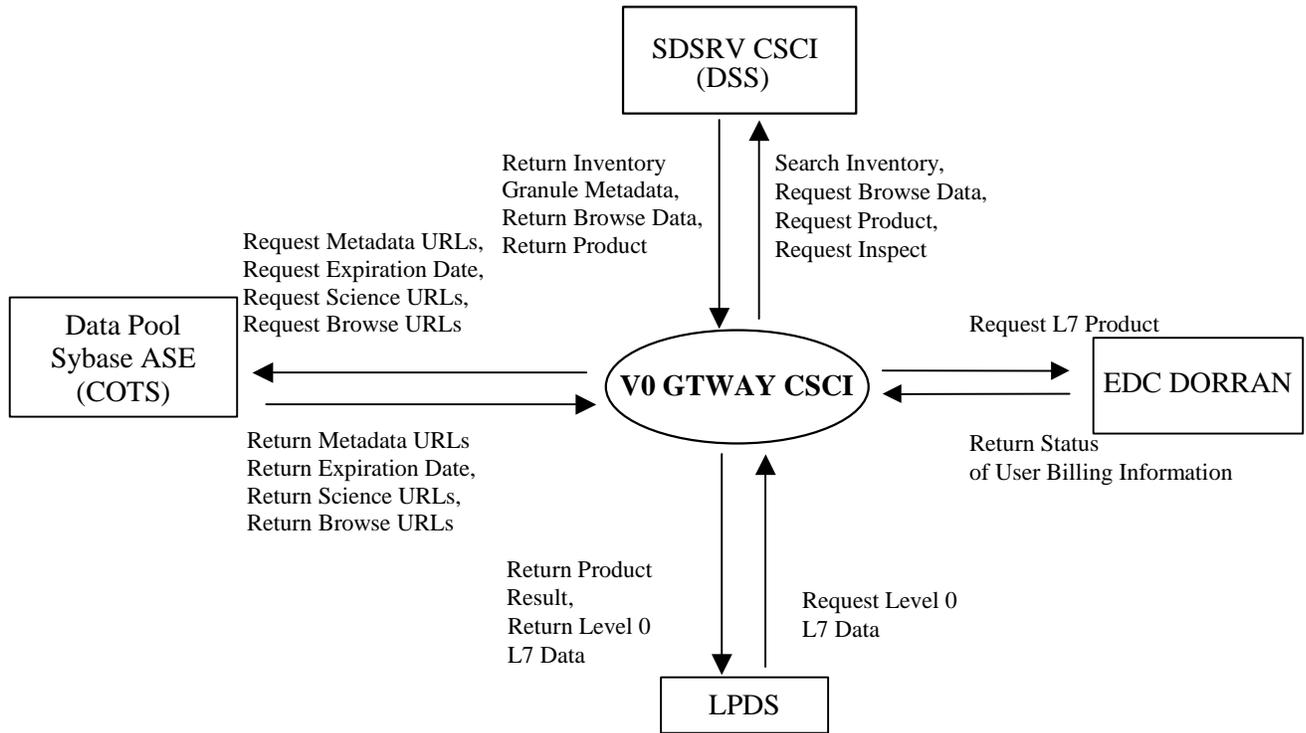


**Figure 4.4-4. V0 GTWAY CSCI Context Diagram**

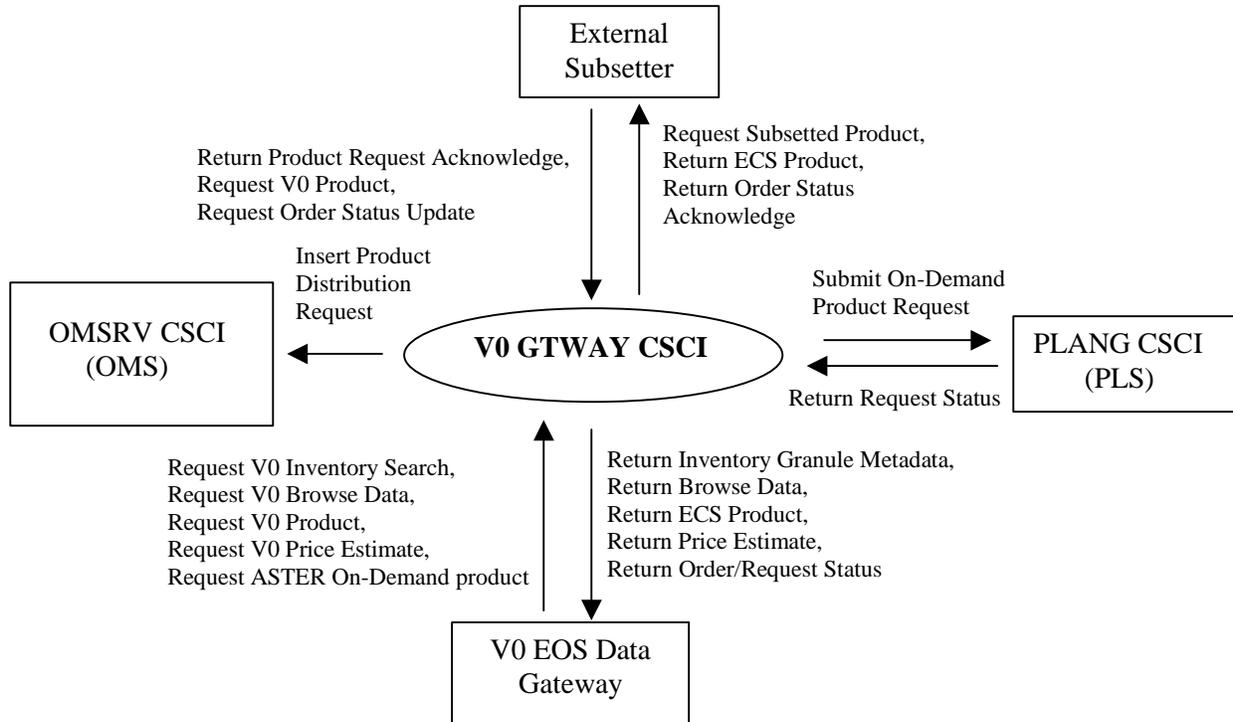

**Figure 4.4-4. V0 GTWAY CSCI Context Diagram (cont.)**

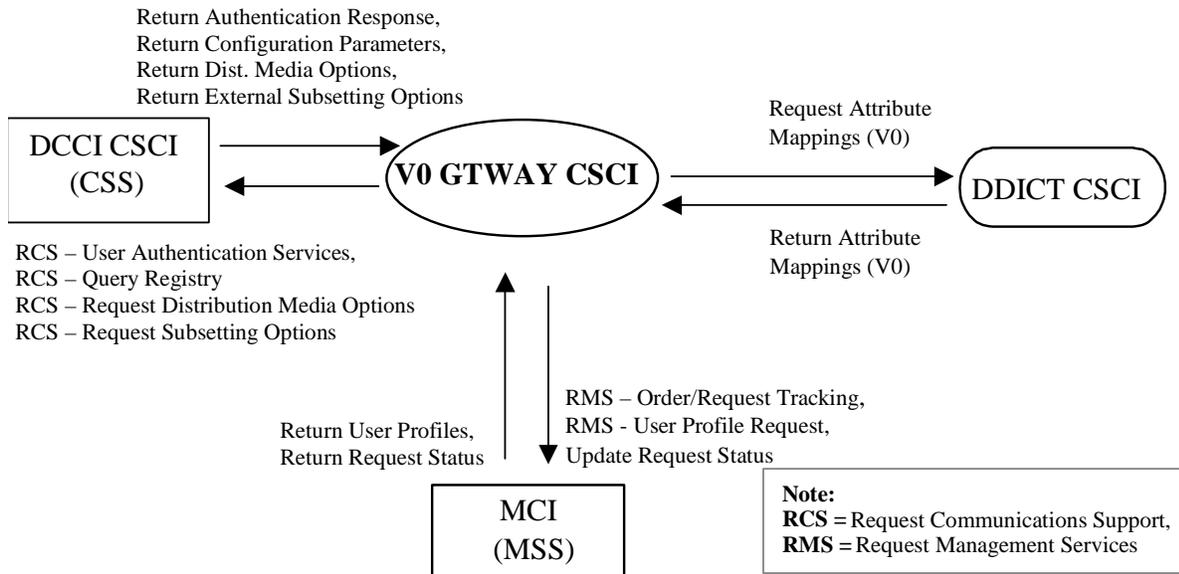

**Figure 4.4-4. V0 GTWAY CSCI Context Diagram (cont.)**

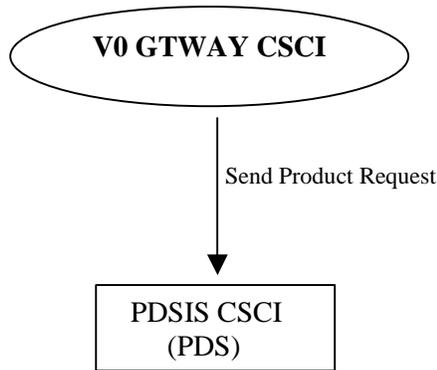

**Figure 4.4-4. V0 GTWAY CSCI Context Diagram (cont.)**

**Table 4.4-6. V0 GTWAY CSCI Interface Events (1 of 5)**

Event	Interface Event Description
Search Inventory	The V0 GTWAY CSCI submits inventory search requests to the <b>SDSRV CSCI</b> within the DSS on behalf of a user.
Request Browse Data	The V0 GTWAY CSCI receives browse requests from the V0 IMS via the EOS Data Gateway and submits the browse requests to the <b>SDSRV CSCI</b> within the DSS on behalf of a user.
Request Product	The V0 GTWAY CSCI submits product requests to the <b>SDSRV CSCI</b> within the DSS on behalf of a user.
Request Inspect	The V0 GTWAY CSCI sends a request for an inspection of granule metadata to the <b>SDSRV CSCI</b> in support of a price estimate request.
Request L7 Product	The V0 GTWAY CSCI receives Landsat 7 product requests from the V0 EOS Data Gateway. The V0 GTWAY CSCI sends requests for Landsat 7 products to the V0 IMS for billing and accounting via the <b>EDC DORRAN (Billing and Accounting System)</b> .
Return Status of User Billing Information	The <b>EDC DORRAN (Billing and Accounting System)</b> returns the status of the user billing information to the V0 GTWAY CSCI to allow or deny the user access to ECS data and services.
Request Level 0 L7 Data	The V0 GTWAY CSCI receives requests for Landsat 7 Level 0 data from the <b>Level 1 Product Distribution System (LPDS)</b> . The LPDS creates Level 1 products from the Landsat Level 0 products ordered through the V0 GTWAY CSCI upon request.
Return Level 0 L7 Data	The V0 GTWAY CSCI returns Landsat 7 Level 0 data to the <b>LPDS</b> for generation of a higher-level product.
Return Product Result	The V0 GTWAY CSCI receives the product result from the <b>LPDS</b> to be distributed to a user.

**Table 4.4-6. V0 GTWAY CSCI Interface Events (2 of 5)**

Event	Interface Event Description
Return Metadata URLs	The <b>Data Pool Sybase ASE</b> returns Metadata URLs to the V0 GTWAY CSCI.
Return Expiration Date	The <b>Data Pool Sybase ASE</b> returns an Expiration Date to the V0 GTWAY CSCI.
Return Science URLs	The <b>Data Pool Sybase ASE</b> returns zero or more Science URL(s) to the V0 GTWAY CSCI.
Return Browse URLs	The <b>Data Pool Sybase ASE</b> returns zero or more Browse URL(s) to the V0 GTWAY CSCI.
Request Metadata URLs	The V0 GTWAY CSCI attempts to retrieve Metadata URLs from the <b>Data Pool Sybase ASE</b> .
Request Expiration Date	The V0 GTWAY CSCI attempts to retrieve Expiration Dates from the <b>Data Pool Sybase ASE</b> .
Request Science URLs	The V0 GTWAY CSCI attempts to retrieve Science URLs from the <b>Data Pool Sybase ASE</b> .
Request Browse URLs	The V0 GTWAY CSCI attempts to retrieve Browse URLs from the <b>Data Pool Sybase ASE</b> .
Return Inventory Granule Metadata	The V0 GTWAY CSCI receives the inventory granule metadata identifying the scene within the granule based on an inventory search request from the <b>SDSRV CSCI</b> .
Return Granule URs	The V0 GTWAY CSCI receives Earth Science Data Type (ESDT) Universal References (URs) for the granules from the <b>SDSRV CSCI</b> .
Return Browse Data	The V0 GTWAY CSCI receives browse data associated with a particular granule from the <b>SDSRV CSCI</b> .
Return Product	The V0 GTWAY CSCI receives granules (including Landsat 7 data archived within the ECS) from the <b>SDSRV CSCI</b> based upon a product request.
Request Subsetted Product	The V0 GTWAY CSCI receives product requests for subsetted products and requests the product be provided from an <b>External Subsetter</b> .
Return ECS Product	The V0 GTWAY CSCI returns granules (including Landsat 7 data archived within the ECS) to the <b>V0 EOS Data Gateway (EDG)</b> .
Return Order Status Acknowledge	The V0 GTWAY CSCI returns status of the order status update to an <b>External Subsetter</b> .
Submit On-Demand Product Request	The <b>PLANG CSCI</b> receives product requests from the V0 GTWAY CSCI for ASTER On-Demand products.
Return Request Status	The <b>PLANG CSCI</b> returns the status of the product request to the V0 GTWAY CSCI. The <b>MCI</b> returns the status of the update request to the V0 GTWAY CSCI.
Return Inventory Granule Metadata	The V0 GTWAY CSCI returns the inventory granule metadata identifying the scene within the granule to the <b>V0 EOS Data Gateway (EDG)</b> .
Return Browse Data	The V0 GTWAY CSCI returns the browse data associated with a particular granule to the <b>V0 EOS Data Gateway</b> .
Return ECS Product	The V0 GTWAY CSCI returns granules (including Landsat 7 data archived within the ECS) to the <b>V0 EOS Data Gateway</b> .

**Table 4.4-6. V0 GTWAY CSCI Interface Events (3 of 5)**

Event	Interface Event Description
Return Price Estimate	The V0 GTWAY CSCI returns a price estimate for a price estimate request to the user via the <b>V0 EOS Data Gateway</b> .
Return Order/ Request Status	The <b>V0 EOS Data Gateway</b> receives order and request status for ASTER On-Demand products from the V0 GTWAY CSCI.
Request V0 Inventory Search	The V0 GTWAY CSCI receives inventory search requests from the <b>V0 EOS Data Gateway</b> on behalf of an external ECS user.
Request V0 Browse Data	The V0 GTWAY CSCI receives browse data requests from the <b>V0 EOS Data Gateway</b> on behalf of an external ECS user.
Request V0 Product	The V0 GTWAY CSCI receives product requests from the <b>V0 EOS Data Gateway</b> or an <b>External Subsetter</b> on behalf of an external ECS user.
Request V0 Price Estimate	The V0 GTWAY CSCI receives price estimate requests from the <b>V0 EOS Data Gateway</b> on behalf of an external ECS user.
Request ASTER On-Demand product	The V0 GTWAY CSCI receives product requests for ASTER On-Demand products from the <b>V0 EOS Data Gateway</b> .
Insert Product Distribution Request	The V0 Gateway (V0 GTWAY) inserts product distribution requests into the Order Manager Data Base Management System (DBMS) within the <b>Order Manager Subsystem (OMS)</b> .
Return Product Request Acknowledge	The V0 GTWAY CSCI receives confirmation of a subsetted request from an <b>External Subsetter</b> .
Request Order Status Update	The V0 GTWAY CSCI receives order status update requests provided by an <b>External Subsetter</b> .
Request Product	The V0 GTWAY CSCI submits product requests to the <b>PDSIS CSCI</b> within the DSS on behalf of a user.
Return Product Request	The V0 GTWAY CSCI receives granules (including Landsat 7 data archived within the ECS) from the <b>PDSIS CSCI</b> based upon a product request.
Request Attribute Mappings (V0)	The V0 GTWAY CSCI sends requests for data collection attribute and keyword mappings, on behalf of a user, to the <b>DDICT CSCI</b> Data Dictionary database via the Sybase ASE to translate requests from the V0 IMS to the ECS protocol and back again.
Return Attribute Mappings (V0)	The <b>DDICT CSCI</b> Data Dictionary database, via the Sybase ASE, returns the data collection attribute and keyword mappings to the V0 GTWAY CSCI on behalf of a user.

**Table 4.4-6. V0 GTWAY CSCI Interface Events (4 of 5)**

Event	Interface Event Description
Request Management Services	<p>The <b>MCI</b> provides a basic management library of services to the CSCIs, implemented as client or server applications, using the DCCI CSCI Process Framework. The basic management library of services includes:</p> <ul style="list-style-type: none"> <li>• <b>System startup and shutdown</b> - Please refer to the release-related, current version of the Mission Operations Procedures for the ECS Project document (611) and the current ECS Project Training Material document (625), identified in Section 2.2.1 of this document.</li> </ul> <p>The MCI also interfaces with other CSCIs to perform the following:</p> <ul style="list-style-type: none"> <li>• <b>Order/Request Tracking</b> - The V0 GTWAY CSCI interfaces with the <b>MCI</b> Order/Request tracking service (EcMsAcOrderSvr) to create a user product order.</li> <li>• <b>User Profile Request</b> - The <b>MCI</b> provides requesting CSCIs with User Profile parameters such as e-mail address and shipping address to support their processing activities.</li> </ul>
Update Request Status	<p>The V0 GTWAY CSCI receives order status update requests provided by an <b>External Subsetter</b> and submits the update to the MSS.</p>
Return User Profiles	<p>The V0 GTWAY CSCI receives user profile information from the <b>MCI</b> to authenticate a user.</p>
Request Communications Support	<p>The <b>DCCI CSCI</b> provides a library of services available to each SDPS and CSMS CSCI. The CSCI services required to perform specific assignments are requested from the DCCI CSCI. These services include:</p> <ul style="list-style-type: none"> <li>• CCS Middleware Support</li> <li>• Database Connection Services</li> <li>• File Transfer Services</li> <li>• Network &amp; Distributed File Services</li> <li>• Bulk Data Transfer Services</li> <li>• Name/Address Services</li> <li>• Password Services</li> <li>• Server Request Framework (SRF)</li> <li>• Universal Reference (UR)</li> <li>• Error/Event Logging</li> <li>• Fault Handling Services</li> <li>• Mode Information</li> <li>• Query Registry - Retrieving the requested configuration attribute-value pairs from the Configuration Registry</li> <li>• Request Distribution Media Options from the Configuration Registry</li> <li>• Request External Subsetting Options from the Configuration Registry</li> <li>• Request ASTER On-Demand Options from the Configuration Registry</li> </ul>
Return Authentication Response	<p>The V0 GTWAY CSCI receives the response to authenticate the user from the <b>DCCI CSCI</b>.</p>


**Table 4.4-6. V0 GTWAY CSCI Interface Events (5 of 5)**

<b>Event</b>	<b>Interface Event Description</b>
Return Configuration Parameters	The V0 Gateway CSCI receives the configuration parameters and associated values from the Registry Server within the <b>DCCI CSCI</b> .
Return Dist. Media Options	The V0 GTWAY CSCI receives the requested distribution media options from the <b>DCCI CSCI</b> .
Return External Subsetting Options	The V0 GTWAY CSCI receives the requested external subsetting options from the <b>DCCI CSCI</b> .
Send Product Request	The V0 GTWAY CSCI sends a product request to the <b>Product Distribution System Internal Server (PDSIS) CSCI</b> .


#### **4.4.2.3 V0 Gateway Architecture**

Figure 4.4-5 is the V0 GTWAY CSCI architecture diagram. The diagram shows the events sent to the V0 GTWAY CSCI processes and the events the V0 GTWAY CSCI processes send to other processes.


The V0 GTWAY CSCI is one process, the EcDmV0ToEcsGateway, as shown in the V0 GTWAY CSCI architecture diagram.

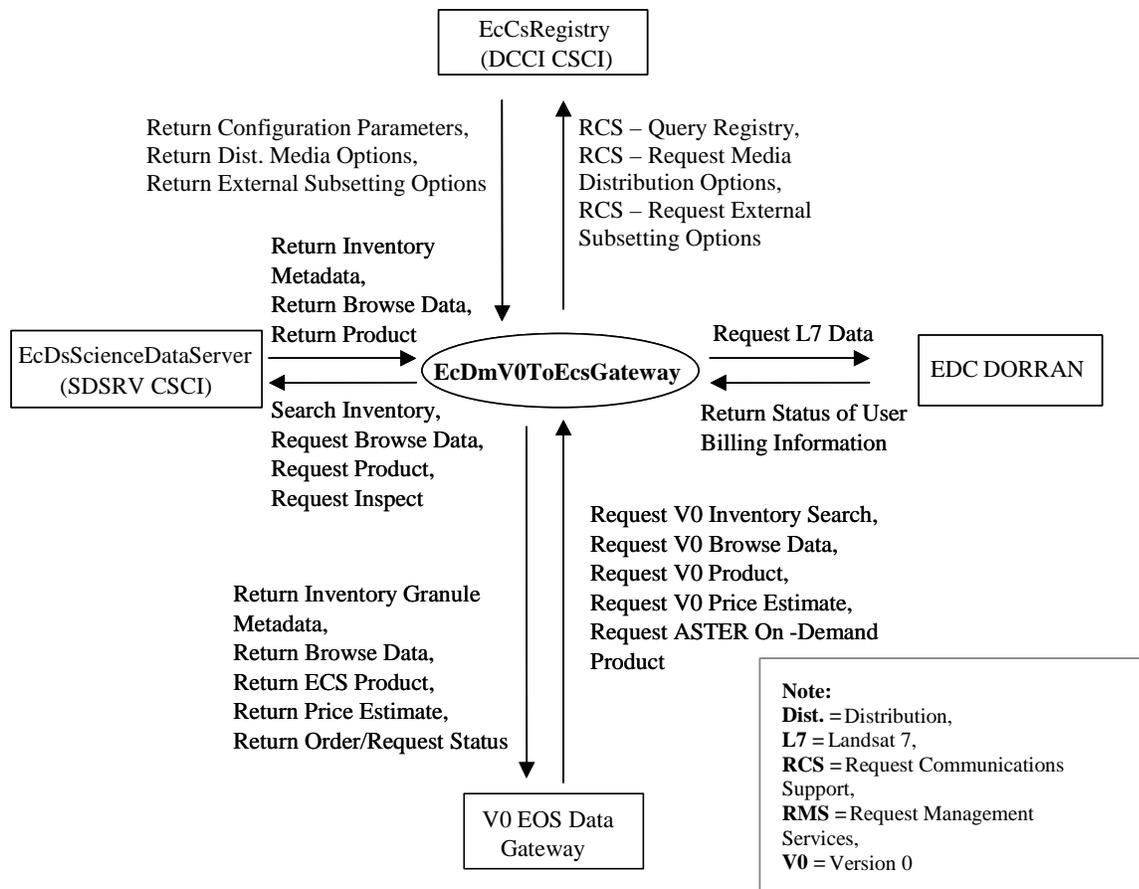


**Figure 4.4-5. V0 GTWAY CSCI Architecture Diagram**

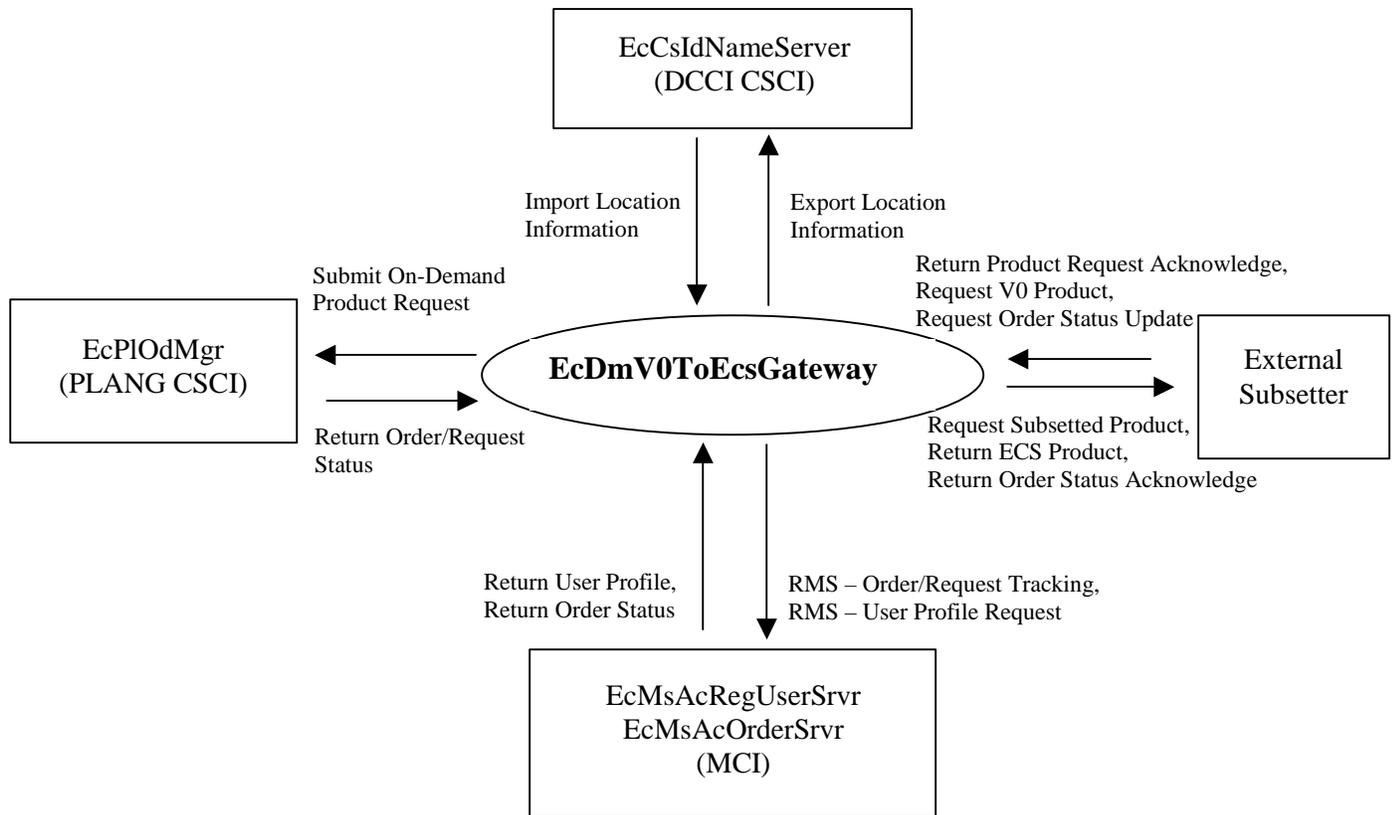

**Figure 4.4-5. V0 GTWAY CSCI Architecture Diagram (cont.)**

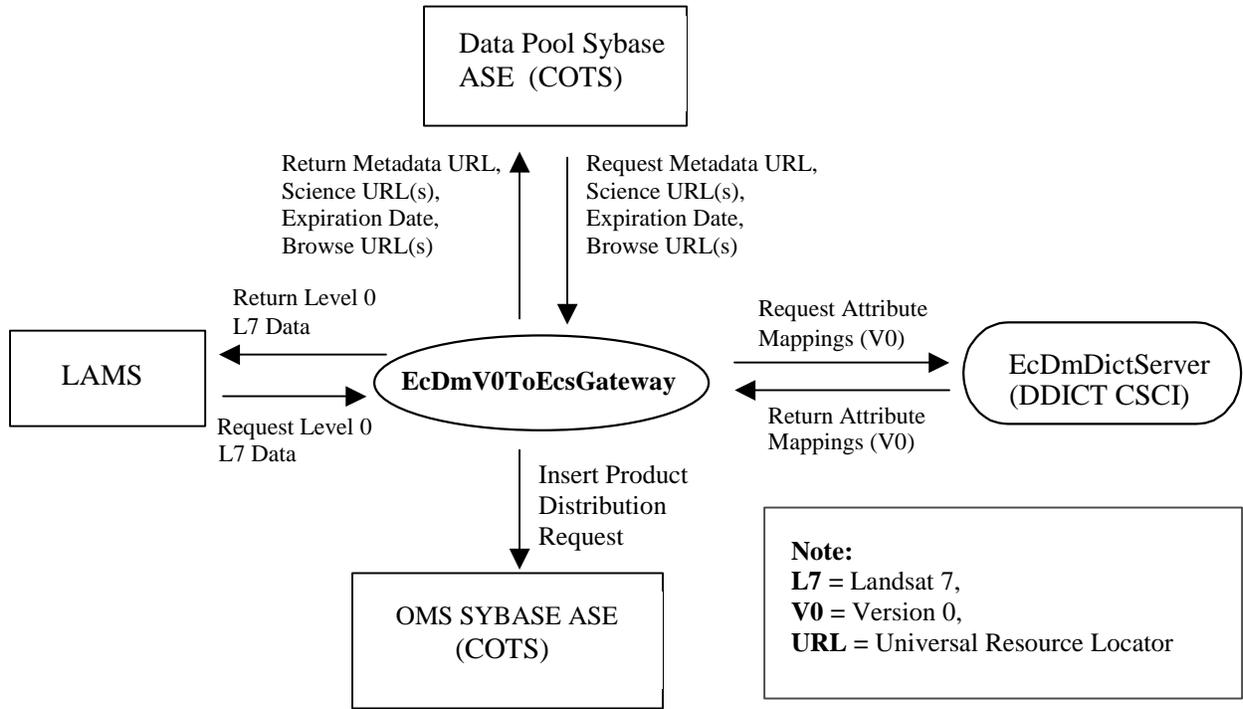

**Figure 4.4-5. V0 GTWAY CSCI Architecture Diagram (cont.)**

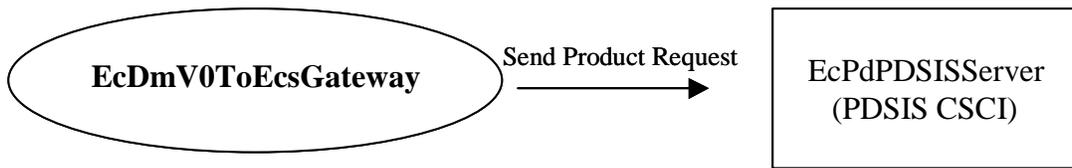

**Figure 4.4-5. V0 GTWAY CSCI Architecture Diagram (cont.)**

#### 4.4.2.4 V0 Gateway Process Descriptions

Table 4.4-7 provides descriptions of the processes shown in the V0 GTWAY CSCI architecture diagrams.

**Table 4.4-7. V0 GTWAY CSCI Processes**

Process	Type	COTS/ Developed	Functionality
EcDmV0ToEcsGateway	Server	Developed	<p>The V0 to ECS Gateway server allows users of the V0 IMS to query on data and services defined within the SDPS.</p> <p>Major Interfaces:</p> <ul style="list-style-type: none"> <li>• Inventory Search: Allows a user to perform searches for data granules within the SDPS archive. URLs to metadata, browse and science granules stored within the Data Pool are also returned along with the expiration date of those URLs.</li> <li>• Browse: Allows users to browse data granules previously found during a search</li> <li>• Product request: Provides the capability for users to submit data acquire requests for obtaining data granules from the SDPS archive</li> <li>• Order Status Update Request: Provides the capability for External Subsetters to provide status updates of orders being fulfilled by the Subsetter but submitted to ECS</li> <li>• Price Estimate requests: Allows users to request a price estimate for a given set of granules with spatial and/or band sub-setting constraints</li> <li>• Inspect Requests: Requests DSS to inspect granule metadata in support of a price estimate request.</li> <li>• ASTER On-Demand: Allows a user to do a product request on ASTER On-Demand products</li> </ul> <p>Server Supports:</p> <ul style="list-style-type: none"> <li>• Synchronous request processing</li> <li>• Asynchronous request processing</li> <li>• Multiple concurrent requests</li> </ul>

**4.4.2.5 V0 Gateway Process Interface Descriptions**

Table 4.4-8 provides descriptions of the interface events shown in the V0 GTWAY CSCI architecture diagrams.

**Table 4.4-8. V0 GTWAY CSCI Process Interface Events (1 of 10)**

Event	Event Frequency	Interface	Initiated By	Event Description
Request Communications Support	Per process request	<p><b>Process:</b> EcCsdNameServer</p> <p><b>Libraries:</b> EcPf, Middleware, FoNs, Folp, oodce</p> <p><b>Classes:</b> EcPfManagedServer, EcPfClient, CCSMdwNameServer, FoNsNameServerProxy, CCSMdwRwNetProxy</p> <p><b>Library (Common):</b> EcUr</p> <p><b>Class:</b> EcUrServerUR</p> <p><b>Library:</b> event</p> <p><b>Class:</b> EcLgErrorMsg</p> <p><b>Process:</b> EcCsRegistry</p> <p><b>Library:</b> EcCsRegistry</p> <p><b>Class:</b> EcRgRegistryServer_C</p>	<p>Process: EcDmV0ToEcsGateway</p> <p><b>Library:</b> Common</p> <p><b>Class:</b> DmGwManagedServer</p>	<p>The <b>DCCI CSCI</b> provides a library of services available to each SDPS and CSMS process. The process services required to perform specific assignments are requested from the DCCI CSCI. These services include:</p> <ul style="list-style-type: none"> <li>• CCS Middleware Support</li> <li>• Database Connection Services</li> <li>• File Transfer Services</li> <li>• Network &amp; Distributed File Services</li> <li>• Bulk Data Transfer Services</li> <li>• Name/Address Services</li> <li>• Password Services</li> <li>• Server Request Framework (SRF)</li> <li>• Universal Reference (UR)</li> <li>• Error/Event Logging</li> <li>• Fault Handling Services</li> <li>• Mode Information</li> <li>• Query Registry - Retrieving the requested configuration attribute-value pairs from the Configuration Registry</li> <li>• Request Distribution Media Options from the Configuration Registry</li> <li>• Request External Subsetting Options from the Configuration Registry</li> <li>• Request ASTER On-Demand Options from the Configuration Registry</li> </ul>

**Table 4.4-8. V0 GTWAY CSCI Process Interface Events (2 of 10)**

Event	Event Frequency	Interface	Initiated By	Event Description
Request L7 Data	One order per request	<i>Process:</i> EDC DORRAN (Billing and Accounting System)	<i>Process:</i> EcDmV0ToEcsGateway <i>Library:</i> RequestProcessing <i>Class:</i> DmGwAcquireRequest	The EcDmV0ToEcsGateway sends billing requests to the <b>EDC DORRAN (Billing and Accounting System)</b> .
Return Status of User Billing Information	A status returned per request	<i>Process:</i> EcDmV0ToEcsGateway <i>Library:</i> RequestProcessing <i>Class:</i> DmGwAcquireRequest	<i>Process:</i> EDC DORRAN (Billing and Accounting System)	In the case of Landsat 7 data sets, the <b>EDC DORRAN (Billing and Accounting System)</b> returns the status of the user billing information to the EcDmV0ToEcsGateway to allow or deny the user access to ECS data and services.
Request V0 Inventory Search	One per inventory search request	<i>Process:</i> EcDmV0ToEcsGateway <i>Library:</i> RequestProcessing <i>Class:</i> DmGwInventoryRequest	<i>Process:</i> V0 EOS Data Gateway	The EcDmV0ToEcsGateway receives inventory search requests from the <b>V0 EOS Data Gateway</b> on behalf of an external ECS user.
Request V0 Browse Data	One per browse request	<i>Process:</i> EcDmV0ToEcsGateway <i>Library:</i> RequestProcessing <i>Class:</i> DmGwBrowseRequest	<i>Process:</i> V0 EOS Data Gateway	The EcDmV0ToEcsGateway receives browse data requests from the <b>V0 EOS Data Gateway</b> on behalf of an external ECS user.
Request V0 Product	One per product request	<i>Process:</i> EcDmV0ToEcsGateway <i>Library:</i> RequestProcessing <i>Class:</i> DmGwAcquireRequest	<b><i>Process:</i></b> V0 EOS Data Gateway  <b><i>Process:</i></b> External Subsetter <i>Library:</i> Ik <i>Class:</i> IK_RxODL	The EcDmV0ToEcsGateway receives product requests from the <b>V0 EOS Data Gateway</b> or <b>External Subsetter</b> on behalf of an external ECS user.

**Table 4.4-8. V0 GTWAY CSCI Process Interface Events (3 of 10)**

<b>Event</b>	<b>Event Frequency</b>	<b>Interface</b>	<b>Initiated By</b>	<b>Event Description</b>
Request V0 Price Estimate	One per product	<i>Process:</i> EcDmV0ToEcsGateway <i>Library:</i> RequestProcessing <i>Class:</i> DmGwPriceEstimateRequest	<i>Process:</i> V0 EOS Data Gateway	The EcDmV0ToEcsGateway receives price estimate requests from the <b>V0 EOS Data Gateway</b> on behalf of an external ECS user.
Submit On-Demand Product Request	One per product request	<i>Process:</i> EcDmV0ToEcsGateway <i>Library:</i> RequestProcessing <i>Class:</i> DmGwAcquireRequest	<b><i>Process:</i></b> V0 EOS Data Gateway  <b><i>Process:</i></b> EcPIOdMgr <i>Library:</i> PIOdMgrClient <i>Class:</i> PIOdMsgProxy	The EcDmV0ToEcsGateway receives product requests from the <b>V0 EOS Data Gateway</b> or <b>EcPIOdMgr</b> for ASTER On-Demand products.
Return Inventory Granule Metadata	One per requested granule	<b><i>Process:</i></b> V0 EOS Data Gateway  <b><i>Process:</i></b> EcDsScienceDataServer <i>Library:</i> DsCI <i>Classes:</i> DsCIESDTRreferenceCollector, DsCIRequest	<i>Process:</i> EcDmV0ToEcsGateway <i>Library:</i> RequestProcessing <i>Class:</i> DmGwInventoryRequest	The EcDmV0ToEcsGateway forwards the inventory granule metadata identifying the scene within the granule based on an inventory search request from the <b>V0 EOS Data Gateway</b> or the <b>EcDsScienceDataServer</b> .
Return Browse Data	One per request	<b><i>Process:</i></b> V0 EOS Data Gateway  <b><i>Process:</i></b> EcDsScienceDataServer <i>Library:</i> DsCI <i>Classes:</i> DsCIESDTRreferenceCollector, DsCIRequest	<i>Process:</i> EcDmV0ToEcsGateway <i>Library:</i> RequestProcessing <i>Class:</i> DmGwV0BrowseRequest	The EcDmV0ToEcsGateway receives browse data associated with a particular granule from the <b>V0 EOS Data Gateway</b> or the <b>EcDsScienceDataServer</b> .

**Table 4.4-8. V0 GTWAY CSCI Process Interface Events (4 of 10)**

Event	Event Frequency	Interface	Initiated By	Event Description
Return ECS Product	One per product request	<p><b>Process:</b> V0 EOS Data Gateway</p> <p><b>Process:</b> External Subsetter</p> <p><b>Library:</b> Ik</p> <p><b>Class:</b> IK_RxODL</p>	<p><b>Process:</b> EcDmV0ToEcsGateway</p> <p><b>Library:</b> RequestProcessing</p> <p><b>Class:</b> DmGwProductRequest</p>	The EcDmV0ToEcsGateway receives products based upon V0 user product requests from the <b>V0 EOS Data Gateway</b> or an <b>External Subsetter</b> .
Return Price Estimate	One estimate per order	<p><b>Process:</b> V0 EOS Data Gateway</p>	<p><b>Process:</b> EcDmV0ToEcsGateway</p> <p><b>Library:</b> RequestProcessing</p> <p><b>Class:</b> DmGwPriceEstimateRequest</p>	The EcDmV0ToEcsGateway calculates the price estimate and sends the estimate to the user via the <b>V0 EOS Data Gateway</b> .
Return Order/ Request Status	One per product request	<p><b>Process:</b> EcDmV0ToEcsGateway</p> <p><b>Library:</b> RequestProcessing</p> <p><b>Class:</b> DmGwAcquireRequest</p>	<p><b>Process:</b> V0 EOS Data Gateway</p>	The EcDmV0ToEcsGateway returns an order status and request status acknowledgment back to the <b>V0 EOS Data Gateway</b> .
Search Inventory	One per inventory search request	<p><b>Process:</b> EcDsScienceDataServer</p> <p><b>Library:</b> DsCI</p> <p><b>Classes:</b> DsCIESDTReferenceCollector, DsCIRequest</p>	<p><b>Process:</b> EcDmV0ToEcsGateway</p> <p><b>Library:</b> RequestProcessing</p> <p><b>Class:</b> DmGwInventoryRequest</p>	The EcDmV0ToEcsGateway submits inventory search requests to the <b>EcDsScienceDataServer</b> on behalf of a user.
Request Browse Data	One per browse request	<p><b>Process:</b> EcDsScienceDataServer</p> <p><b>Library:</b> DsCI</p> <p><b>Classes:</b> DsCIESDTReferenceCollector, DsCIRequest</p>	<p><b>Process:</b> EcDmV0ToEcsGateway</p> <p><b>Library:</b> RequestProcessing</p> <p><b>Class:</b> DmGwBrowseRequest</p>	The EcDmV0ToEcsGateway submits requests for browse data to the <b>EcDsScienceDataServer</b> on behalf of a user.

**Table 4.4-8. V0 GTWAY CSCI Process Interface Events (5 of 10)**

Event	Event Frequency	Interface	Initiated By	Event Description
Request Product	One per product request	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Classes:</i> DsCIESDTReferenceCollector, DsCIRequest	<i>Process:</i> EcDmV0ToEcsGateway <i>Library:</i> RequestProcessing <i>Class:</i> DmGwAcquireRequest	The EcDmV0ToEcsGateway submits product requests to the <b>EcDsScienceDataServer</b> on behalf of a user.
Request Inspect	One per price estimate request	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Classes:</i> DsCIESDTReferenceCollector, DsCIRequest	<i>Process:</i> EcDmV0ToEcsGateway <i>Library:</i> RequestProcessing <i>Class:</i> DmGwPriceEstimateRequest	The EcDmV0ToEcsGateway sends a request for an inspection of granule metadata to the <b>EcDsScienceDataServer</b> in support of a price estimate request.
Return Product	One per product request	<i>Process:</i> EcDmV0ToEcsGateway <i>Library:</i> RequestProcessing <i>Class:</i> DmGwAcquireRequest	<i>Process:</i> EcDsScienceDataServer <i>Library:</i> DsCI <i>Classes:</i> DsCIESDTReferenceCollector, DsCIRequest	The <b>EcDsScienceDataServer</b> returns products based upon a product request from a user.
Return Configuration Parameters	One set per request	<i>Process:</i> EcDmV0ToEcsGateway <i>Library:</i> Common <i>Class:</i> DmGwConfigItems	<i>Process:</i> EcCsRegistry <i>Library:</i> EcCsRegistry <i>Class:</i> EcRgRegistryServer_C	The <b>EcCsRegistry</b> returns the attribute-value pairs (configuration parameters) to the EcDmV0ToEcsGateway upon request.
Return Dist. Media Options	One set per request	<i>Process:</i> EcCsRegistry <i>Library:</i> EcCsRegistry <i>Class:</i> EcRgRegistryServer_C	<i>Process:</i> EcDmV0ToEcsGateway <i>Library:</i> Common <i>Class:</i> DmGwConfigItems	The <b>EcCsRegistry</b> returns the requested distribution media options to the EcDmV0ToEcsGateway.
Return External Subsetting Options	One set per request	<i>Process:</i> EcCsRegistry <i>Library:</i> EcCsRegistry <i>Class:</i> EcRgRegistryServer_C	<i>Process:</i> EcDmV0ToEcsGateway <i>Library:</i> Common <i>Class:</i> DmGwConfigItems	The <b>EcCsRegistry</b> returns the requested external subsetting options to the EcDmV0ToEcsGateway.

**Table 4.4-8. V0 GTWAY CSCI Process Interface Events (6 of 10)**

Event	Event Frequency	Interface	Initiated By	Event Description
Export Location Information	Once at system startup and after each failure recovery	<i>Process:</i> EcCslNameServer <i>Libraries:</i> EcPf, Middleware, FoNs, Folp, oodce <i>Classes:</i> EcPfManagedServer, CCSMdwNameServer, FoNsNameServerProxy, CCSMdwRwNetProxy	<i>Process:</i> EcDmV0ToEcsGateway <i>Library:</i> Common <i>Class:</i> DmGwManagedServer	The EcDmV0ToEcsGateway stores physical and logical server location information in the <b>EcCslNameServer</b> .
Return Product Request Acknowledge	One per product request	<i>Process:</i> EcDmV0ToEcsGateway <i>Library:</i> RequestProcessing <i>Class:</i> DmGwAcquireRequest	<i>Process:</i> External Subsetter <i>Library:</i> Ik <i>Class:</i> IK_RxODL	The EcDmV0ToEcsGateway receives a product result from an <b>External Subsetter</b> upon submission of a request for a subsetted product.
Request Order Status Update	One to three per subsetted product request	<i>Process:</i> EcDmV0ToEcsGateway <i>Library:</i> RequestProcessing <i>Class:</i> DmGwOrderStatusUpdateRequest	<i>Process:</i> External Subsetter <i>Library:</i> Ik <i>Class:</i> IK_RxODL	The EcDmV0ToEcsGateway receives order status update requests from an <b>External Subsetter</b> . 1. Being Processed 2. Completed Processing or Terminated 3. Shipped
Request Subsetted Product	One per product request	<i>Process:</i> EcDmV0ToEcsGateway <i>Library:</i> RequestProcessing <i>Class:</i> DmGwAcquireRequest	<i>Process:</i> External Subsetter <i>Library:</i> Ik <i>Class:</i> IK_RxODL	The EcDmV0ToEcsGateway receives product requests from the <b>External Subsetter</b> for subsetted products on behalf of an external ECS user.
Return Order Status Acknowledgment	One per Order Status Update request	<i>Process:</i> EcDmV0ToEcsGateway <i>Library:</i> RequestProcessing <i>Class:</i> DmGwOrderStatusUpdateRequest	<i>Process:</i> External Subsetter <i>Library:</i> Ik <i>Class:</i> IK_RxODL	The EcDmV0ToEcsGateway returns an order status acknowledgment upon receipt of an order status update request from an <b>External Subsetter</b> .

**Table 4.4-8. V0 GTWAY CSCI Process Interface Events (7 of 10)**

<b>Event</b>	<b>Event Frequency</b>	<b>Interface</b>	<b>Initiated By</b>	<b>Event Description</b>
Return User Profile	One per profile request	<i>Process:</i> EcDmV0ToEcsGateway <i>Class:</i> DmGwRequestReceiver	<i>Process:</i> EcMsAcRegUserSrvr <i>Library:</i> MsAcClnt <i>Class:</i> EcAcProfileMgr	The <b>EcMsAcRegUserSrvr</b> returns a user profile based upon a profile request from a user.
Return Order Status	One per order request	<i>Process:</i> EcDmV0ToEcsGateway <i>Class:</i> DmGwRequestReceiver	<i>Process:</i> EcMsAcOrderSrvr <i>Library:</i> MsAcClnt <i>Class:</i> EcAcOrderCMgr	The <b>EcMsAcOrderSrvr</b> returns an order id and status to the EcDmV0ToEcsGateway to send back to the user.
Return Order/Request Status	One per product request	<i>Process:</i> EcDmV0ToEcsGateway <i>Library:</i> Request Processing <i>Class:</i> DmGwAcquireRequest	<i>Process:</i> EcPIOdMgr <i>Library:</i> PIOdMgrClient <i>Class:</i> PIOdMsgProxy	The EcDmV0ToEcsGateway receives order/request status for ASTER On-Demand product request from the EcPIOdMgr.
Submit On-Demand Product Request	One per product request	<i>Process:</i> EcDmV0ToEcsGateway <i>Library:</i> Request Processing <i>Class:</i> DmGwAcquireRequest	<i>Process:</i> V0 EOS Data Gateway	The EcDmV0ToEcsGateway sends product requests to the EcPIOdMgr for ASTER On-Demand products
Import Location Information	As required for processing	<i>Process:</i> EcDmV0ToEcsGateway <i>Class:</i> DmGwRequestReceiver	<i>Process:</i> EcCsldNameServer <i>Libraries:</i> EcPf, Middleware, FoNs, Folp, oodce <i>Classes:</i> EcPfManagedServer, CCSMdwNameServer, FoNsNameServerProxy, CCSMdwRwNetProxy	The EcDmV0ToEcsGateway requests server location information from the <b>EcCsldNameServer</b> .

**Table 4.4-8. V0 GTWAY CSCI Process Interface Events (8 of 10)**

Event	Event Frequency	Interface	Initiated By	Event Description
Request Metadata URL, Science URLs, Expiration Date, Browse URLs	One per granule	Data Pool Sybase ASE (COTS) <i>Library:</i> RWDb <i>Class:</i> RWDBManager	<i>Process:</i> EcDmV0ToEcsGateway <i>Library:</i> Common <i>Class:</i> DmGwDatapoolProxy	The EcDmV0ToEcsGateway retrieves metadata URL, science URLs, browse URLs and expiration dates from the <b>Sybase ASE</b> .
Request Attribute Mappings (V0)	One set per request	<i>Process:</i> EcDmDictServer, <i>COTS SW Library:</i> RWDBTools.h++ <i>Library:</i> DmLmDbi <i>Class:</i> DmLmIntQuery	<i>Process:</i> EcDmV0ToEcsGateway <i>Library:</i> Persistent <i>Class:</i> DmGwAttributeMap	The EcDmV0ToEcsGateway sends requests to the <b>EcDmDictServer Data Dictionary database via the Sybase ASE</b> for data collection and keyword mappings to translate requests from the V0 IMS to the SDPS and back again.
Return Attribute Mappings (V0)	One set per request	<i>Process:</i> EcDmV0ToEcsGateway <i>Library:</i> Persistent <i>Class:</i> DmGwAttributeMap	<i>Process:</i> EcDmDictServer <i>COTS SW Library:</i> RWDBTools.h++ <i>Library:</i> DmLmDbi <i>Class:</i> DmLmIntQuery	The EcDmV0ToEcsGateway receives data collection and keyword mappings to translate requests from the V0 IMS to the SDPS and back again from the <b>EcDmDictServer Data Dictionary database via the Sybase ASE</b> .
Insert Product Distribution Request	One per service request	<i>Process:</i> Sybase Server (COTS)	<i>Process:</i> EcDmV0ToEcsGateway <i>Library:</i> OmClientlib <i>Classes:</i> OmSrDbInterface, OmSrV0InputIf	The EcDmV0ToEcsGateway inserts product distribution requests into the Order Manager DBMS.
Request Level 0 L7 data	Per user request	LAMS	<i>Process:</i> EcDmV0ToEcsGateway <i>Library:</i> RequestProcessing <i>Class:</i> DmGwAcquireRequest	The EcDmV0ToEcsGateway receives requests for Landsat 7 Level 0 data from the <b>Landsat 7 Archive Management System (LAMS)</b> . The LAMS creates Level 1 products from the Landsat level 0 data ordered through the EcDmV0ToEcsGateway upon request.

**Table 4.4-8. V0 GTWAY CSCI Process Interface Events (9 of 10)**

Event	Event Frequency	Interface	Initiated By	Event Description
Return Level 0 L7 Data	One per user request	<i>Process:</i> EcDmV0ToEcsGateway <i>Library:</i> RequestProcessing <i>Class:</i> DmGwAcquireRequest	LAMS	The EcDmV0ToEcsGateway returns Landsat 7 level 0 data to the <b>LAMS</b> for generation of higher-level products to be distributed by the LAMS to a user.
Return Metadata URL, Science URL(s), Expiration Date, Browse URL(s)	One per granule	<i>Process:</i> EcDmV0ToEcsGateway <i>Library:</i> Common <i>Class:</i> DmGwDatapoolProxy	Data Pool Sybase ASE (COTS) <i>Library:</i> RWDb <i>Class:</i> RWDBManager	The <b>Sybase ASE</b> returns the Metadata URL, Science URL(s), Browse URL(s) and Expiration Dates to the EcDmV0ToEcsGateway.
Request Management Services (RMS)	At system startup or shutdown and for restarts	<i>Process:</i> EcDmV0ToEcsGateway	DAAC unique startup scripts	<b>System startup and shutdown</b> - Please refer to the release-related, current version of the Mission Operations Procedures for the ECS Project document (611) and the current ECS Project Training Material document (625), identified in Section 2.2.1 of this document.
RMS (Cont.)	One per product order	<i>Process:</i> EcMsAcOrderSrvr <i>Library:</i> MsAcCInt <i>Class:</i> EcAcOrderCMgr	<i>Process:</i> EcDmV0ToEcsGateway <i>Class:</i> DmGwRequestReceiver	<b>DMS Order/Request Tracking Update</b> – The V0 GTWAY interfaces with the Order/Request tracking service, <b>EcMsAcOrderSrvr</b> , to create a user product order.
RMS (Cont.)	One per profile request	<i>Process:</i> EcMsAcRegUserSrvr <i>Library:</i> MsAcCInt <i>Class:</i> EcAcProfileMgr	<i>Process:</i> EcDmV0ToEcsGateway <i>Class:</i> DmGwRequestReceiver	<b>User Profile Request</b> - The <b>EcMsAcRegUserSrvr</b> provides requesting processes with User Profile information such as e-mail address and shipping address to support their processing activities.

**Table 4.4-8. V0 GTWAY CSCI Process Interface Events (10 of 10)**

Event	Event Frequency	Interface	Initiated By	Event Description
Send Product Request	Per user request	<i>Process:</i> EcPdPDSIServer <i>Library:</i> Pdsis.jar <i>Class:</i> ECSPDSServer	<i>Process:</i> EcDmV0ToEcsGateway <i>Library:</i> Pdsis.jar <i>Class:</i> ECSPDSServer	The <b>EcDmV0ToEcsGateway</b> sends a product distribution request to the EcPdPDSIServer.

#### 4.4.2.6 V0 Gateway Data Stores

Table 4.4-9 provides descriptions of the data stores shown in the V0 GTWAY CSCI architecture diagram. The V0 to ECS and ECS to V0 Gateway processes access the Data Dictionary data store.

**Table 4.4-9. V0 GTWAY CSCI Data Store**

Data Store	Type	Functionality
EcDmDictService	Database	<p>The Data Dictionary database, EcDmDictService, is a Sybase relational database that persistently stores the collection and collection related information on a physical disk medium. The DDICT database is replicated wholly to each DAAC.</p> <p>The data stores in the Data Dictionary database used by the V0 GTWAY CSCI are:</p> <ul style="list-style-type: none"> <li>• Collection Types: A list of all the data types within the SDPS</li> <li>• Collection Attributes and Keywords: Attributes and keywords associated with collections originating within and outside the SDPS are used by the V0 GTWAY CSCI to translate requests between the V0 IMS and the SDPS.</li> </ul>

#### 4.4.3 Data Management Subsystem Hardware

The primary components of the Data Management Subsystem include two hardware CIs, Data Management Hardware CI (DMGHW) and Interface Hardware CI (INTHW), co-owned by the Interoperability Subsystem, as described below. Custom code and applications are loaded on the internal disks of all hosts to prevent dependencies on specific hosts or peripherals. The general-purpose workstations are standalone hosts without fail-over capability. In the event of a host failure, any of the available workstations could be used to support end user DAAC maintenance.

##### 4.4.3.1 Data Management Hardware CI (DMGHW) Description

The DMGHW CI includes general-purpose low-end SUN workstations. These workstations are used as end user workstations in maintenance of each of the respective DAAC sites. The Server is used to support Sybase database replication and backup.

#### **4.4.3.2 Interface Hardware CI (INTHW) Description, as used by the Data Management Subsystem**

The INTHW CI includes two Interface Servers. The Interface Servers support the Client Subsystem and a portion of the Communications Subsystem. The servers are SUN class machines with detailed specifications in the site-specific hardware design diagram, baseline document number 920-TDx-001. Because of their common configuration, these hosts can be configured interchangeably. DMS software runs on these hosts: DDICT and V0 GTWAY. The Data Dictionary Server (EcDmDictServer) allows authorized users to perform data searches, inserts, updates and deletions to data within the Data Dictionary Database. The V0 GTWAY consists of multiple processes to allow access to data and services between the ECS Data Server and the V0 IMS System. Detailed information can be found in the site-specific hardware/software mapping, baseline document number 920-TDx-002.

A SUN SPARC Storage Array, Model 114, is dual ported between both hosts and provides storage for the Data Dictionary Database and Sybase Replication software. A detailed configuration is specified in baseline document number 920-TDx-009.

The Interface Servers are both “hot” and share the resident RAID device. In the event of a host failure, the operational server assumes total ownership of the RAID and all processes. In this state, the server is recognized to be running in degraded mode until recovery is completed.