

311-EMD-206

## **EOSDIS Maintenance and Development Project**

# **Release 7.21 Data Pool Database Design and Schema Specifications for the EMD Project**

July 2008

Raytheon Information Solutions  
Riverdale, Maryland

This page intentionally left blank.

**Release 7.21**  
**Data Pool Database Design and Schema**  
**Specifications for the EMD Project**

**July 2008**

Prepared Under Contract NAS5-03098  
CDRL Item #23

**RESPONSIBLE ENGINEER**

  
Robert Hartranft

7/30/2008  
Date

EOSDIS Maintenance and Development Project

**SUBMITTED BY**

  
Art Cohen, EMD Task 201 Manager  
EOSDIS Maintenance and Development Project

7/30/08  
Date

**Raytheon Information Solutions**  
Riverdale, Maryland

This page intentionally left blank.

# Preface

---

This document is a formal contract deliverable. It requires Government review and approval within 45 business days. Changes to this document will be made by document change notice (DCN) or by complete revision.

Any questions should be addressed to:

Data Management Office  
The EMD Project Office  
Raytheon Information Solutions  
5700 Rivertech Court  
Riverdale, Maryland 20737

## Revision History

Document Number	Status/Issue	Publication Date	CCR Number
311-EMD-206	Original	July 2008	08-0338

This document describes the data design and database specification for the Subscription Server subsystem. It is one of eleven documents comprising the detailed database design specifications for each of the EMD subsystems.

The subsystem database design specifications for the as delivered system include:

- 311-EMD-200      Release 7.21 INGEST (INS) Subsystem Database Design and Schema Specifications for the EMD Project
- 311-EMD-203      Release 7.21 Systems Management Subsystem Database Design and Schema Specifications for the EMD Project
- 311-EMD-204      Release 7.21 Order Manager Database Design and Schema Specifications for the EMD Project
- 311-EMD-205      Release 7.21 Spatial Subscription Server (SSS) Database Design and Schema Specifications for the EMD Project
- 311-EMD-206      Release 7.21 Data Pool Database Design and Schema Specifications for the EMD Project
- 311-EMD-207      Release 7.21 Inventory Database Design and Schema Specifications for the EMD Project

Entity Relationship Diagrams (ERDs) presented in this document have been exported directly from tools and some cases contain too much detail to be easily readable within hard copy page constraints. The reader is encouraged to view these drawings on-line using the Portable Document Format (PDF) electronic copy available via the ECS Data Handling System (EDHS) on the world-wide web at <http://edhs1.gsfc.nasa.gov>.

## **Abstract**

---

This document outlines Release 7 “as-built” database design and database schema of the Data Pool database including the physical layout of the database and initial installation parameters.

**Keywords:** data, database, design, configuration, database installation, scripts, security, data model, data dictionary, replication, performance tuning, SQL server, database security, replication, database scripts

This page intentionally left blank.

# **Contents**

---

## **Preface**

## **Abstract**

### **1. Introduction**

1.1	Purpose and Scope .....	1-1
1.2	Document Organization .....	1-1

### **2. Related Documents**

2.1	Applicable Documents.....	2-1
2.2	Information Documents .....	2-2

### **3. Data Design**

3.1	Database Overview .....	3-1
3.1.1	Physical Data Model Entity Relationship Diagram .....	3-1
3.1.2	Tables .....	3-2
3.1.3	Columns .....	3-34
3.1.4	Domains .....	3-63
3.1.5	Defaults .....	3-63
3.1.6	Views .....	3-64
3.1.7	Integrity Constraints.....	3-65
3.1.8	Triggers .....	3-69
3.1.9	Stored Procedures .....	3-70
3.2	File Usage .....	3-97

## **4. Performance and Tuning Factors**

4.1	Indexes .....	4-1
4.2	Segments .....	4-4
4.3	Caches .....	4-5

## **5. Database Security**

5.1	Approach.....	5-1
5.2	Users .....	5-1
5.3	Groups.....	5-2
5.4	Roles .....	5-2
5.5	Login/Group Object Permissions.....	5-3

## **6. Scripts**

6.1	Installation Scripts .....	6-1
6.2	De-Installation Scripts.....	6-1
6.3	Backup and Recovery Scripts .....	6-1
6.4	Miscellaneous Scripts .....	6-2

## **List of Figures**

Figure 3-1.	ERD Key .....	3-1
Figure 3-2a.	DataPool View for EMS Extract Processing.....	3-64
Figure 3-2b.	DataPool View for MISR Processing Criteria .....	3-65
Figure 5-1.	Sybase General Approach to SQL Server Security .....	5-1

## **List of Tables**

Table 3-1.	Data Tables Listing.....	3-2
Table 3-2.	EcDbDatabaseVersions .....	3-4
Table 3-2a.	DlBmgtEvents.....	3-4

Table 3-2b. DILogicalLock .....	3-5
Table 3-3. DICollectionGroup .....	3-5
Table 3-4. DICollections .....	3-5
Table 3-5. DIThemes .....	3-6
Table 3-6. DILgranuleThemeXref .....	3-7
Table 3-7. DILgranuleSubscription .....	3-7
Table 3-8. DILgranules .....	3-8
Table 3-9. DILgranuleExpirationPriority .....	3-8
Table 3-10. DILMeasuredParameter .....	3-9
Table 3-11. DIBrowse .....	3-9
Table 3-12. DIBrowseFile .....	3-10
Table 3-13. DILgranuleBrowseXref .....	3-10
Table 3-14. DILfile .....	3-10
Table 3-15. DIBoundingRectangle .....	3-11
Table 3-16. DILGPolygon .....	3-11
Table 3-17. DILOrbitCalculatedSpatial .....	3-11
Table 3-18. DILOrbitPolygons .....	3-12
Table 3-19. DILPlatInstrCode .....	3-12
Table 3-20. DILConfig .....	3-12
Table 3-21. DILFilesToDelete .....	3-13
Table 3-22. DILTempGrans .....	3-13
Table 3-23. DILTempPhantoms .....	3-13
Table 3-24. DILProcAttributes .....	3-14
Table 3-25. DILInsertActionQueue .....	3-14
Table 3-26. DILActiveInsertProcesses .....	3-15
Table 3-27. DILFtpAccessLog .....	3-15
Table 3-28. DILWebAccessLog .....	3-16
Table 3-29. DILAccessRollup .....	3-16
Table 3-30. DILgranuleAccess .....	3-16

Table 3-31. DIDimensionGroupESDT .....	3-17
Table 3-32. DIDimensionDayNight.....	3-17
Table 3-33. DIDimensionTimeOfDay .....	3-18
Table 3-34. DIDimensionMP.....	3-18
Table 3-35. DIDimensionScienceQA .....	3-18
Table 3-36. DIDimensionMPScienceQAXref .....	3-19
Table 3-37. DIDimensionTemporal .....	3-19
Table 3-38. DIDimensionSpatialT6All.....	3-19
Table 3-39. DIDimensionPolygonXref .....	3-20
Table 3-40. DIFactGroupESDT .....	3-20
Table 3-41. DIFactDayNight.....	3-20
Table 3-42. DIFactTimeOfDay .....	3-20
Table 3-43. DIFactQA.....	3-21
Table 3-44. DIFactTemporalRange.....	3-21
Table 3-45. DIIdentifier .....	3-21
Table 3-46. DIUpdGranulesTemp.....	3-22
Table 3-47. DIXMLFilesToInsert .....	3-22
Table 3-48. DIECSDsToInsert.....	3-23
Table 3-49. DIHEGLookup.....	3-23
Table 3-50. DICartOrder .....	3-23
Table 3-51. DICartOrderItem.....	3-24
Table 3-52. DIQAUpdFlagTemp .....	3-24
Table 3-53. DIRecoveryParameters .....	3-25
Table 3-54. DIQAUpdTTempBcp.....	3-25
Table 3-55. DIFileSystems.....	3-25
Table 3-56. DICompressionAlgorithms.....	3-26
Table 3-57. DICloudCoverSource .....	3-26
Table 3-58. DIGrCloudCover .....	3-26
Table 3-59. DIGranuleTiles .....	3-27

Table 3-60. DIESTDCurrentDensityMap .....	3-27
Table 3-61. DIOMSGranules .....	3-27
Table 3-62. DICartOrderItemBand .....	3-28
Table 3-63. DlHdfObjects.....	3-28
Table 3-64. DlHdfBands .....	3-28
Table 3-65. DlHdfFields .....	3-28
Table 3-66. DlHdf4thDimensions.....	3-29
Table 3-67. DlGranuleHdfObjectsXref.....	3-29
Table 3-68. DlNOSELookup .....	3-29
Table 3-69. DlStatGroupESDT .....	3-29
Table 3-70. DlStatESDT .....	3-30
Table 3-71. DlStatTheme.....	3-30
Table 3-72. DlAgingConfig .....	3-30
Table 3-73. DIHEGOOptions .....	3-31
Table 3-74. DIHEGOptionLabel.....	3-31
Table 3-75. DIHEGOptionCollXref.....	3-31
Table 3-76. DIHEGExceptions .....	3-32
Table 3-77. DIHEGExceptionCollXref .....	3-32
Table 3-78. DlGranuleOWS .....	3-32
Table 3-79. DlOWSDeletedGranules .....	3-33
Table 3-80. DlAdAlert .....	3-33
Table 3-81. DlAdMessages.....	3-33
Table 3-82. DlBulkWrkTable .....	3-34
Table 3-83. DlPrivateCollection .....	3-34
Table 3-84. Column Descriptions .....	3-35
Table 3-85. Dependencies on Table: DlCollectionGroup.....	3-65
Table 3-86. Dependencies on Table: DlCollections .....	3-66
Table 3-87. Dependencies on Table: DlGranules .....	3-66
Table 3-88. Dependencies on Table: DlBrowse .....	3-67

Table 3-89. Dependencies on Table: DIPlatInstrCode.....	3-67
Table 3-90. Dependencies on Table: DlDimensionSpatialT6All .....	3-67
Table 3-91. Dependencies on Table: DlDimesionTimeOfDay.....	3-67
Table 3-92. Dependencies on Table: DlDimensionDayNight .....	3-67
Table 3-93. Dependencies on Table: DlDimensionGroupESDT.....	3-67
Table 3-94. Dependencies on Table: DlOrbitPolygons .....	3-67
Table 3-95. Dependencies on Table: DlThemes.....	3-68
Table 3-96. Dependencies on Table: DlCartOrder .....	3-68
Table 3-97. Dependencies on Table: DlDimensionMP .....	3-68
Table 3-98. Dependencies on Table: DlDimensionScienceQA.....	3-68
Table 3-99. Dependencies on Table: DlCompressionAlgorithms .....	3-68
Table 3-100. Dependencies on Table: DlFileSystems .....	3-68
Table 3-101. Dependencies on Table: DlCloudCoverSource .....	3-68
Table 3-102. Dependencies on Table: DlHdfObjects .....	3-68
Table 3-103. Dependencies on Table: DlHdfBands .....	3-69
Table 3-104. Dependencies on Table: DlHdfFields.....	3-69
Table 3-105. Dependencies on Table: DlHdf4thDimensions .....	3-69
Table 3-106. Dependencies on Table: DlCartOrderItem .....	3-69
Table 3-107. Dependencies on Table: DlHEGOPTIONS.....	3-69
Table 3-108. Dependencies on Table: DlHEGExceptions.....	3-69
Table 3-109. Trigger Listing.....	3-70
Table 3-110. Procedure Listing.....	3-71
Table 4-1. Index Type Key .....	4-1
Table 4-2. Index List.....	4-1
Table 4-3. Segment Descriptions .....	4-5
Table 5-1. Permission Key.....	5-3
Table 5-2. Object Permissions .....	5-3
Table 6-1. Installation Scripts .....	6-1
Table 6-2. De-Installation Scripts .....	6-1

Table 6-3. Backup and Recovery Scripts .....	6-1
Table 6-4. Miscellaneous Scripts and Input Data Files.....	6-2

## **Appendix A. Entity Relationship Diagram**

### **Abbreviations and Acronyms**

This page intentionally left blank.

# **1. Introduction**

---

## **1.1 Purpose and Scope**

The purpose of Data Pool Database Design and Database Schema Specification document is to describe the database design and schema specifications implemented to support the data requirements of Release 7 Data Pool CSCI.

## **1.2 Document Organization**

Section 3 provides a detailed description of all objects used in the DataPool database including all object types with detailed definitions where appropriate.

Section 4 describes the performance strategies used within the DataPool database including indexes, segments and any defined caches used for memory optimization.

Section 5 describes the security measures used within the DataPool database. This includes strategies used at the user, group, object, server and role levels.

Section 6 describes custom utilities that provide means of installing and backing up the DataPool database including fault recovery mechanisms.

This page intentionally left blank.

## 2. Related Documents

---

### 2.1 Applicable Documents

The following documents, including Internet links, are referenced in this document, or are directly applicable, or contain policies or other directive matters that are binding upon the content of this volume.

305-EMD-200	Release 7.21 Segment Design Specifications for the EMD Project
920-TDN-009	DAAC Hardware Database Mapping/NSIDC
920-TDE-009	DAAC Hardware Database Mapping/EDC
920-TDL-009	DAAC Hardware Database Mapping/LARC
920-TDS-009	DAAC Hardware Database Mapping/SMC
920-TDN-010	DAAC Database Configuration/NSIDC
920-TDE-010	DAAC Database Configuration/EDC
920-TDL-010	DAAC Database Configuration/LARC
920-TDS-010	DAAC Database Configuration/SMC
920-TDN-011	DAAC Sybase Log Mapping/NSIDC
920-TDE-011	DAAC Sybase Log Mapping/EDC
920-TDL-011	DAAC Sybase Log Mapping/LARC
920-TDS-011	DAAC Sybase Log Mapping/SMC
922-TDN-013	Disk Partitions/NSIDC
922-TDE-013	Disk Partitions/EDC
922-TDL-013	Disk Partitions/LARC
922-TDS-013	Disk Partitions/SMC

These documents are maintained as part of the EMD baseline and available on the world wide web at the URL: <http://cmdm.east.hitc.com/baseline>. Please note that this is a partial mirror site in that some items are not available (they are identified) since this is OPEN to all. This site may also be reached through the EDHS homepage. Scroll page to the connections line and click on the EMD Baseline Information System link.

## **2.2 Information Documents**

The following documents, although not directly applicable, amplify or clarify the information presented in this document. These documents are not binding on this document.

609-EMD-200	Release 7.21 Operations Tools Manual for the EMD Project
611-EMD-200	Release 7.21 Mission Operation Procedures for the EMD Project

## 3. Data Design


---

### 3.1 Database Overview

The Data Pool database implements the large majority of the persistent data requirements for the Data Pool subsystem. The database is designed in such a manner as to satisfy business policy while maintaining data integrity and consistency. Database tables are implemented using the Sybase Relational Database Management system (RDBMS). All components of the Data Pool database are described in the sections which follow, in sufficient detail to support maintenance needs.

#### 3.1.1 Physical Data Model Entity Relationship Diagram

The Entity Relationship Diagram (ERD) presents a schematic depiction of the Data Pool physical data model. The ERDs presented here for the Data Pool database were produced using the Power Designer Data Architect Computer Aided Software Engineering (CASE) tool. ERDs represent the relationship between entities or database tables. On ERDs, tables are represented by rectangles and relationships are represented as arrow (see Figure 3-1).

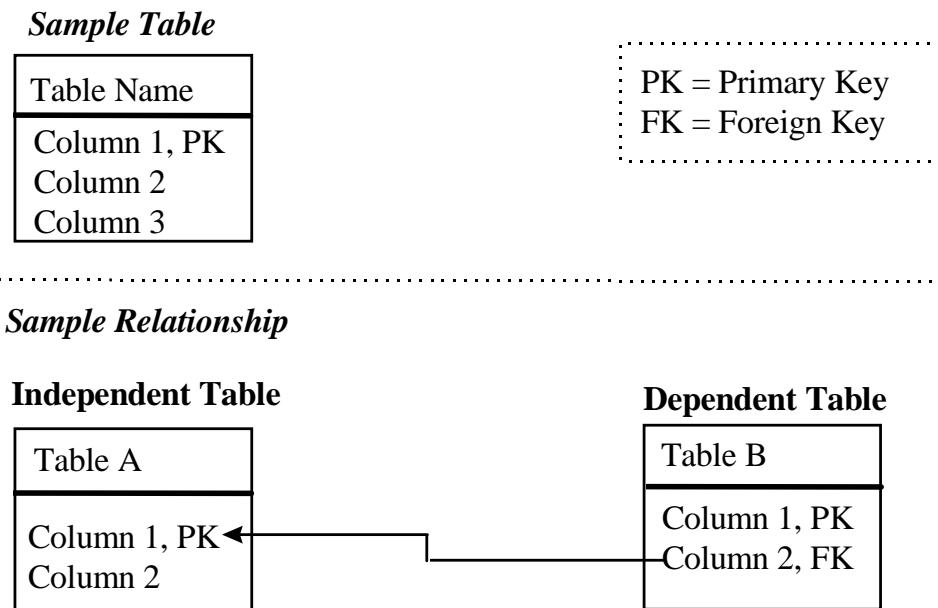

**Figure 3-1. ERD Key**

### **3.1.2 Tables**

A listing of each the tables in the Data Pool database is given here. A brief definition of each of these tables follows including a listing of the columns comprising the tables in Table 3-1. The column list indicates if the column is part of the primary key for the table, that is, if the columns can be used alone or in combination with other primary key columns to uniquely identify a single row in the table. The column list also indicates whether the column is a mandatory attribute that must be included in every row.

***Table 3-1. Data Tables Listing (1 of 3)***

Table Name
DIAccessRollup
DIActiveInsertProcesses
DIAdAlert
DIAdMessages
DIAgingConfig
DIBmgtEvents
DIBoundingRectangle
DIBrowse
DIBrowseFile
DIBulkWrkTable
DICartOrder
DICartOrderItem
DICartOrderItemBand
DICloudCoverSource
DICollectionGroup
DICollections
DICompressionAlgorithms
DIConfig
DIDimensionDayNight
DIDimensionGroupESDT
DIDimensionMP
DIDimensionMPScienceQAXref
DIDimensionPolygonXref
DIDimensionScienceQA
DIDimensionSpatialT6All
DIDimensionTemporal
DIDimensionTimeOfDay
DIECSIdsToInsert
DIESDTCurrentDensityMap
DIFactDayNight
DIFactGroupESDT

**Table 3-1. Data Tables Listing (2 of 3)**

Table Name
DIFactQA
DIFactTemporalRange
DIFactTimeOfDay
DIFile
DIFilesToDelete
DIFileSystems
DIFtpAccessLog
DIGPolygon
DIGranuleAccess
DIGranuleBrowseXref
DIGranuleExpirationPriority
DIGranuleHdfObjectsXref
DIGranuleOWS
DIGranules
DIGranuleSubscription
DIGranuleThemeXref
DIGranuleTiles
DIGrCloudCover
DIHdf4thDimensions
DIHdfBands
DIHdfFields
DIHdfObjects
DIHEGExceptionCollXref
DIHEGExceptions
DIHEGLookup
DIHEGOptionCollXref
DIHEGOptionLabel
DIHEGOPTIONS
DIIdentifier
DIInsertActionQueue
DILogicalLock
DIMeasuredParameter
DINOSELookup
DIOMSGranules
DIOrbitCalculatedSpatial
DIOrbitPolygons
DIOWSDeletedGranules
DIPlatInstrCode
DIPrivateCollection
DIProcAttributes

**Table 3-1. Data Tables Listing (3 of 3)**

Table Name
DIQAUpdFlagTemp
DIQAUpdTempBcp
DIRecoveryParameters
DIStatESDT
DIStatGroupESDT
DIStatTheme
DITempGrans
DITempPhantoms
DIThemes
DIUpdGranulesTemp
DIWebAccessLog
DIXMLFilesToInsert
EcDbDatabaseVersions

Table 3-2 identifies the current version level of the Data Pool database.

**Table 3-2. EcDbDatabaseVersions**

Column Name	Data Type	PK Column	Mandatory Column
EcDbSchemaVersionId	smallint	Yes	Yes
EcDbDropVersion	char(64)	Yes	Yes
EcDbDropDescription	varchar(255)	No	No
EcDbCurrentVersionFlag	char(1)	No	No
EcDbDatabaseName	varchar(255)	No	No
EcDbDropInstallDate	datetime	No	No
EcDbSybaseVersion	varchar(255)	No	No
EcDbSybaseServer	varchar(255)	No	No
EcDbComments	varchar(255)	No	No
EcDbUpdateProcess	varchar(255)	No	No

Table 3-2a records the events involved in BMGT processing.

**Table 3-2a. DIBmgtEvents (1 of 2)**

Column Name	Data Type	PK Column	Mandatory Column
eventKey	numeric(16)	Yes	Yes
granuleId	numeric(16)	No	No
eventType	char(10)	No	Yes
ecsId	numeric(16)	No	No

**Table 3-2a. DI~~mgt~~Events (2 of 2)**

Column Name	Data Type	PK Column	Mandatory Column
exported	char(1)	No	Yes
eventTime	datetime	No	Yes
cycleId	numeric(16)	No	Yes
collectionId	numeric(16)	No	No

Table 3-2b is used as a semaphore for the deletion of granules. In order to delete a single granule, one must first update this table. While this table is locked, other deletion requests must wait.

**Table 3-2b. DI~~Logical~~Lock**

Column Name	Data Type	PK Column	Mandatory Column
logicalLock	smallint	Yes	Yes

Table 3-3 The DI~~Collection~~Group table contains information about Data Pool collection groups. Collection groups are based on the ECS Bulk Metadata Generation Tool collection groups, and represent groupings of ECS collections by instrument and mission (e.g. MOAT).

**Table 3-3. DI~~Collection~~Group**

Column Name	Data Type	PK Column	Mandatory Column
groupId	char(12)	Yes	Yes
displayName	char(12)	No	Yes
CollGrpDescription	varchar(255)	No	No
ecsFlag	char(1)	No	Yes
insertTime	datetime	No	No
lastUpdate	datetime	No	No
orderOnlyGrpDirName	varchar(40)	No	No

Table 3-4 The DI~~Collections~~ table contains information about Data Pool collections. It includes the short name and version of the collection and flags to determine whether data from the collection may be stored in the Data Pool.

**Table 3-4. DI~~Collections~~ (1 of 2)**

Column Name	Data Type	PK Column	Mandatory Column
collectionId	ID	Yes	Yes
ShortName	char(8)	No	Yes
VersionId	tinyint	No	Yes

**Table 3-4. DICollections (2 of 2)**

Column Name	Data Type	PK Column	Mandatory Column
CollectionDescription	varchar(255)	No	No
groupId	char(12)	No	Yes
spatialSearchType	varchar(40)	No	Yes
exclusionSCFlag	char(1)	No	Yes
insertEnabledFlag	char(1)	No	Yes
convertEnabledFlag	char(1)	No	Yes
bulkExportedFlag	char(1)	No	Yes
insertTime	datetime	No	No
lastUpdate	datetime	No	No
qualitySummary	varchar(255)	No	No
fileSystemLabel	char(10)	No	No
compAlgorithmLabel	char(10)	No	No
moveFlag	char(1)	No	Yes
cloudSourceId	ID	No	No
global	char(1)	No	Yes
dayNight	char(1)	No	Yes
twentyFourHr	char(1)	No	Yes
gridLevel	tinyint	No	Yes
orderOnlySNDirName	varchar(40)	No	No
orderOnlyFSLabel	char(10)	No	No
replacementOn	char(1)	No	Yes
GranPublicFlag	char(1)	No	No
PublicRetTime	int	No	No
PublicPriority	tinyint	No	No
NonECSFlag	char(1)	No	No
HiddenRetTime	int	No	No

Table 3-5 The DIThemes table contains information about Data Pool themes. It includes the theme name and flags to determine whether granules associated with the theme may be stored in the Data Pool and whether the theme is allowed for web drill down.

**Table 3-5. DIThemes (1 of 2)**

Column Name	Data Type	PK Column	Mandatory Column
themeld	ID	Yes	Yes
name	varchar(40)	No	Yes
themeDescription	varchar(255)	No	No
insertEnabledFlag	char(1)	No	Yes
webVisibleFlag	char(1)	No	Yes

**Table 3-5. *DIThemes* (2 of 2)**

Column Name	Data Type	PK Column	Mandatory Column
preConvertEnabledFlag	char(1)	No	No
serviceRequested	char(1)	No	No
insertTime	datetime	No	No
lastUpdate	datetime	No	No

Table 3-6 The DIGranuleThemeXref table contains cross-reference information between Data Pool science granules and their associated themes.

**Table 3-6. *DIGranuleThemeXref***

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	Yes	Yes
themeId	ID	Yes	Yes

Table 3-7 The DIGranuleSubscription table provides a cross-reference that relates each granule in the Data Pool to the list of subscriptions that caused its insertion.

**Table 3-7. *DIGranuleSubscription***

Column Name	Data Type	PK Column	Mandatory Column
subId	int	Yes	Yes
dbId	ID	Yes	Yes

Table 3-8 The DIGranules table is the central table of the Data Pool database. It contains the core attributes for all science granules in the Data Pool. It also includes the range date and time attributes for each granule.

**Table 3-8. DIGranules**

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	Yes	Yes
externalId	varchar(80)	No	No
ecslId	ID	No	No
collectionId	ID	No	Yes
ShortName	char(8)	No	Yes
VersionId	tinyint	No	Yes
RangeBeginningDate	datetime	No	No
RangeBeginningTime	varchar(20)	No	No
RangeEndingDate	datetime	No	No
RangeEndingTime	varchar(20)	No	No
DayNightFlag	char(5)	No	No
sizeMB	float	No	No
ecslInsertTime	datetime	No	No
insertTime	datetime	No	No
lastUpdate	datetime	No	No
isOrderOnly	char(1)	No	No
versionNumber	int	No	No
archiveNeeded	char(1)	No	No
archiveTimeStamp	datetime	No	No
localGranuleId	varchar(80)	No	No
publishTime	datetime	No	No

Table 3-9 The DIGranuleExpirationPriority table contains the expiration date and retention priority for each granule in Data Pool.

**Table 3-9. DIGranuleExpirationPriority**

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	Yes	Yes
expirationDate	datetime	No	Yes
retentionPriority	int	No	Yes

Table 3-10 The DIMeasuredParameter table contains one row for each measured parameter associated with a granule in the Data Pool. All data in this table are copied from the DsMdMeasureParameter table in the ECS SDSRV database.

**Table 3-10. DIMeasuredParameter**

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	Yes	Yes
ParameterName	varchar(40)	Yes	Yes
ScienceQualityFlag	varchar(25)	No	No
OperationalQualityFlag	varchar(20)	No	No
AutomaticQualityFlag	varchar(64)	No	No
ScienceQualityFlagExplan	varchar(255)	No	No
OperationalQualityFlagExplan	varchar(255)	No	No
AutomaticQualityFlagExplan	varchar(255)	No	No
QAPercentMissingData	int	No	No
QAPercentOutOfBoundsData	int	No	No
QAPercentInterpolatedData	int	No	No
QAPercentCloudCover	int	No	No

Table 3-11 The DIBrowse table contains information about Browse granules in the Data Pool.

**Table 3-11. DIBrowse**

Column Name	Data Type	PK Column	Mandatory Column
browseld	ID	Yes	Yes
externalId	varchar(80)	No	No
ecsId	ID	No	No
BrowseDescription	varchar(255)	No	No
ecsInsertTime	datetime	No	No
insertTime	datetime	No	No
lastUpdate	datetime	No	No
isOrderOnly	char(1)	No	No
versionNumber	int	No	No
archiveNeeded	char(1)	No	No
archiveTimeStamp	datetime	No	No
ProductionDateTime	datetime	No	No
publishTime	datetime	No	No

Table 3-12 The DIBrowseFile table contains information about Browse files in the Data Pool.

**Table 3-12. *DIBrowseFile***

Column Name	Data Type	PK Column	Mandatory Column
browseld	ID	Yes	Yes
fileName	varchar(255)	Yes	Yes
directoryPath	varchar(255)	No	Yes
fileType	varchar(10)	No	No
fileSize	numeric(16,0)	No	No

Table 3-13 The DIGranuleBrowseXref table contains cross-reference information between Data Pool science granules and their associated browse granules.

**Table 3-13. *DIGranuleBrowseXref***

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	Yes	Yes
browseld	ID	Yes	Yes

Table 3-14 The DIFile table contains information about science files in the Data Pool.

**Table 3-14. *DIFile***

Column Name	Data Type	PK Column	Mandatory Column
directoryPath	varchar(255)	Yes	Yes
fileName	varchar(255)	Yes	Yes
granuleId	ID	No	Yes
fileType	varchar(10)	No	No
fileSize	numeric(16,0)	No	No
origChksum	varchar(128)	No	No
compFileSize	numeric(16,0)	No	No
compAlgorithmLabel	char(10)	No	No
compChksum	varchar(128)	No	No
uncompChksum	varchar(128)	No	No
compTimeInSec	int	No	No
uncompChksumTypeld	tinyint	No	No

Table 3-15 The DIBoundingRectangle table contains spatial information about granules whose spatial coverage is LLBOX.

**Table 3-15. *DIBoundingRectangle***

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	Yes	Yes
BoundingRectangle	llbox	No	Yes

Table 3-16 The DIGPolygon table contains spatial information about granules whose spatial coverage is a gpolygon.

**Table 3-16. *DIGPolygon***

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	Yes	Yes
GpolygonContainer	gpolygon	No	Yes

Table 3-17 The DIOrbitCalculatedSpatial table contains spatial information about granules with nominal orbital spatial coverage.

**Table 3-17. *DIOrbitCalculatedSpatial***

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	Yes	Yes
PathNo	smallint	Yes	Yes
StartBlock	smallint	Yes	Yes
EndBlock	smallint	No	Yes
platInstrCode	tinyint	Yes	Yes
misrCamerald	varchar(20)	No	No
misrOrbitNumber	int	No	No
misrProductVersion	int	No	No

Table 3-18 The DIOrbitPolygons table contains a series of orbit polygons for a platform and instrument combination. The data in this table is static and applies only to MISR data.

**Table 3-18. DIOrbitPolygons**

Column Name	Data Type	PK Column	Mandatory Column
platInstrCode	tinyint	Yes	Yes
PathNo	smallint	Yes	Yes
SequenceNo	smallint	Yes	Yes
Orbit	polygon	No	Yes

Table 3-19 The DIPlatInstrCode table contains static look up information regarding the platform and instrument names for a given platInstrCode.

**Table 3-19. DIPlatInstrCode**

Column Name	Data Type	PK Column	Mandatory Column
platInstrCode	tinyint	Yes	Yes
platformShortName	varchar(20)	No	Yes
instrumentName	varchar(80)	No	Yes

Table 3-20 The DIConfig table contains parameter names and values for all Data Pool configuration parameters which are configurable through the Data Pool Maintenance GUI.

**Table 3-20. DIConfig**

Column Name	Data Type	PK Column	Mandatory Column
parameterName	varchar(50)	Yes	Yes
parameterDescription	varchar(255)	No	No
parameterType	char(1)	No	Yes
intValue	int	No	No
charValue	varchar(255)	No	No
floatValue	float	No	No

Table 3-21 The DIFilesToDelete table is used by the Data Pool Cleanup Utility as temporary storage for all granules which get deleted from the Data Pool inventory through a Data Pool clean up session.

**Table 3-21. DIFilesToDelete**

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	No	No
browselId	ID	No	No
fileName	varchar(255)	No	Yes
fileSize	numeric(16,0)	No	Yes
directoryPath	varchar(255)	No	No
state	tinyint	No	Yes
ecslId	ID	No	No
ShortName	char(8)	No	No
VersionId	tinyint	No	No

Table 3-22 The DITempGrans is used by the Data Pool Cleanup Utility for the temporary storage of granuleIds that are passed in through the –file parameter.

**Table 3-22. DITempGrans**

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	Yes	Yes

Table 3-23 The DITempPhantoms is used as temporary work space to store the names of phantom files. It will populated from a flat file using the Sybase Bulk Copy Utility.

**Table 3-23. DITempPhantoms**

Column Name	Data Type	PK Column	Mandatory Column
directoryPath	varchar(255)	No	Yes
fileName	varchar(255)	No	Yes

Table 3-24 The DIProcAttributes table contains the static configuration attributes read by the Data Pool stored procedures.

**Table 3-24. DIProcAttributes**

Column Name	Data Type	PK Column	Mandatory Column
procName	varchar(30)	Yes	Yes
attributeName	varchar(30)	Yes	Yes
charValue	varchar(255)	No	No
intValue	int	No	No
floatValue	float	No	No

Table 3-25 The DIInsertActionQueue table contains Data Pool insert actions that have been queued up by the Spatial Subscription Server or by the Batch Insert Utility.

**Table 3-25. DIInsertActionQueue**

Column Name	Data Type	PK Column	Mandatory Column
insQueueId	ID	Yes	Yes
ecslId	ID	No	No
ShortName	char(8)	No	No
VersionId	tinyint	No	No
subId	int	No	No
retentionPriority	int	No	No
retentionPeriod	int	No	No
metadataOnlyFlag	char(1)	No	No
enqueueTime	datetime	No	Yes
completionTime	datetime	No	No
retryCount	int	No	No
status	varchar(20)	No	No
statusDetail	varchar(255)	No	No
inCacheFlag	char(1)	No	Yes
actionSource	char(2)	No	No
dispatchPriority	smallint	No	No
xmlFileName	varchar(255)	No	No
themeld	ID	No	No
batchLabel	varchar(16)	No	No
archiveHost	varchar(60)	No	No
tapeLabel	varchar(60)	No	No
requestId	varchar(10)	No	No
requestSuspendFlag	char(1)	No	No
processState	char(1)	No	No

Table 3-26 The DIActiveInsertProcesses table contains information on all the current active Data Pool insert processes.

**Table 3-26. DIActiveInsertProcesses**

Column Name	Data Type	PK Column	Mandatory Column
granIdentifier	varchar(255)	Yes	Yes
processId	int	No	No
parentPid	int	No	No
xmlFileName	varchar(255)	No	No
ecsId	ID	No	No
ShortName	char(8)	No	Yes
VersionId	tinyint	No	Yes
retentionPriority	int	No	No
retentionPeriod	int	No	No
metadataOnlyFlag	char(1)	No	No
startTime	datetime	No	No
lastStatusChangeTime	datetime	No	No
status	varchar(50)	No	No
inCacheFlag	char(1)	No	No
retryCount	int	No	No

Table 3-27 The DIFtpAccessLog table is a temporary table used by the Data Pool Access Statistic Utility. It contains entries for each Data Pool file access which appears in the FTP log.

**Table 3-27. DIFtpAccessLog**

Column Name	Data Type	PK Column	Mandatory Column
directoryPath	varchar(255)	No	Yes
fileName	varchar(255)	No	Yes
accessTime	datetime	No	Yes
fileSize	numeric(16,0)	No	Yes
transferTime	int	No	No
specialActionFlag	char(2)	No	No
ipAddress	char(15)	No	Yes
domainName	varchar(255)	No	No

Table 3-28 The DIWebAccessLog table is a temporary table used by the Data Pool Access Statistic Utility. It contains entries for each Data Pool file (metadata, browse) access which appears in the web log.

**Table 3-28. DIWebAccessLog**

Column Name	Data Type	PK Column	Mandatory Column
directoryPath	varchar(255)	No	Yes
fileName	varchar(255)	No	Yes
accessTime	datetime	No	Yes
ipAddress	char(15)	No	Yes
domainName	varchar(255)	No	No

Table 3-29 The DIAccessRollup table contains an entry for each Data Pool access statistic rollup.

**Table 3-29. DIAccessRollup**

Column Name	Data Type	PK Column	Mandatory Column
rollupBeginningDateTime	datetime	Yes	Yes
rollupEndingDateTime	datetime	Yes	Yes
accessType	varchar(10)	Yes	Yes

Table 3-30 The DlGranuleAccess table contains information used for running Data Pool access statistic reports.

**Table 3-30. DlGranuleAccess (1 of 2)**

Column Name	Data Type	PK Column	Mandatory Column
dbId	ID	No	Yes
accessType	varchar(10)	No	Yes
age	int	No	Yes
ecsId	ID	No	No
fileSize	numeric(16,0)	No	Yes
fileType	varchar(10)	No	No
fileName	varchar(255)	No	No
accessTime	datetime	No	Yes
transferTime	int	No	No

**Table 3-30. *DIGranuleAccess* (2 of 2)**

Column Name	Data Type	PK Column	Mandatory Column
specialActionFlag	char(2)	No	No
ipAddress	char(15)	No	Yes
domainName	varchar(255)	No	No

Table 3-31 The *DIDimensionGroupESDT* table is a static table used for web drill down. It contains information about all possible Data Pool collection groups and collections to which a Data Pool granule might belong.

**Table 3-31. *DIDimensionGroupESDT***

Column Name	Data Type	PK Column	Mandatory Column
groupESDTKey	int	Yes	Yes
groupESDTType	char(1)	No	Yes
groupESDTVValue	varchar(12)	No	Yes
groupESDTDescription	varchar(255)	No	No
groupKey	int	No	No

Table 3-32 The *DIDimensionDayNight* table is a static table used for web drill down. It contains information about all possible values of DayNightFlag for Data Pool granules might belong.

**Table 3-32. *DIDimensionDayNight***

Column Name	Data Type	PK Column	Mandatory Column
dayNightKey	smallint	Yes	Yes
dayNightValue	char(1)	No	Yes
dayNightDescription	varchar(20)	No	No

Table 3-33 The DIDimensionTimeOfDay table is a static table used for web drill down. It contains a row for each time of day bin to which a Data Pool granule might belong.

**Table 3-33. DIDimensionTimeOfDay**

Column Name	Data Type	PK Column	Mandatory Column
timeOfDayKey	smallint	Yes	Yes
timeOfDayType	char(1)	No	Yes
timeOfDayBeginTime	smallint	No	Yes
timeOfDayEndTime	smallint	No	Yes
todHourKey	smallint	No	No
todFourHourKey	smallint	No	No
todHalfDayKey	smallint	No	No

Table 3-34 The DIDimensionMP table is a static table used for web drill down. It contains information about all known measured parameters.

**Table 3-34. DIDimensionMP**

Column Name	Data Type	PK Column	Mandatory Column
qaKey	int	Yes	Yes
qaValue	varchar(40)	No	No
qaDescription	varchar(255)	No	Yes

Table 3-35 The DIDimensionScienceQA table is a static table used for web drill down. It contains information about all known science QA flag values which could be present in a Data Pool granule.

**Table 3-35. DIDimensionScienceQA**

Column Name	Data Type	PK Column	Mandatory Column
qaCode	tinyint	Yes	Yes
qaValue	varchar(40)	No	Yes
qaDescription	varchar(255)	No	Yes

Table 3-36 The DIIDimensionMPScienceQAXref table is a table used for web drill down. It contains unique key to indicate the combination of measured parameter and a valid science QA value.

**Table 3-36. DIIDimensionMPScienceQAXref**

Column Name	Data Type	PK Column	Mandatory Column
qaKey	int	Yes	Yes
qaCode	tinyint	No	Yes
qaNameKey	int	No	Yes

Table 3-37 The DIIDimensionTemporal table is a static table used for web drill down. It contains a row for each possible temporal bin (day, week, month, and year) to which a Data Pool granule might belong. NOTE: For purposes of this table, weeks are not defined as Sunday – Saturday groups of 7 days, but are instead defined as subsets of 7 day weeks wholly contained within a calendar month. For example, if a Sunday – Saturday week is July 29 – August 4, this table will store July 29-31 as one week, and August 1-4 as a different week.

**Table 3-37. DIIDimensionTemporal**

Column Name	Data Type	PK Column	Mandatory Column
temporalKey	int	Yes	Yes
temporalType	char(1)	No	Yes
temporalBeginDate	datetime	No	Yes
temporalEndDate	datetime	No	Yes
weekKey	int	No	No
monthKey	int	No	No
yearKey	int	No	No

Table 3-38 The DIIDimensionSpatialT6All table is a static table used for web drill down. It contains a row for each possible spatial bin to which a Data Pool granule might belong.

**Table 3-38. DIIDimensionSpatialT6All**

Column Name	Data Type	PK Column	Mandatory Column
spatialKey	int	Yes	Yes
gridLevel	tinyint	No	Yes
tile	int	No	Yes
BR_Degree	gpolygon	No	Yes

Table 3-39 The DI Dimension Polygon Xref table is a static table used for populating the DI ESDT Current Density Map table for orbit data. It contains spatial keys for each polygon with specific path and instrument.

**Table 3-39. DI Dimension Polygon Xref**

Column Name	Data Type	PK Column	Mandatory Column
spatialKey	int	Yes	Yes
platInstrCode	tinyint	Yes	Yes
PathNo	smallint	Yes	Yes
SequenceNo	smallint	Yes	Yes
gridLevel	tinyint	No	No

Table 3-40 The DI Fact Group ESDT table stores the relation between granules and the group/ESDT search domain, defined in DI Dimension Group ESDT.

**Table 3-40. DI Fact Group ESDT**

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	Yes	Yes
groupESDTKey	int	Yes	Yes

Table 3-41 The DI Fact Day Night stores the relation between granules and the DayNight search domain, defined in DI Dimension Day Night.

**Table 3-41. DI Fact Day Night**

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	Yes	Yes
dayNightKey	smallint	Yes	Yes

Table 3-42 The DI Fact Time Of Day table stores the relation between granules and the TimeOfDay search domain, defined in DI Dimension TimeOfDay.

**Table 3-42. DI Fact Time Of Day**

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	Yes	Yes
timeOfDayKey	smallint	Yes	Yes

Table 3-43 The DIFactQA table stores the relation between granules and the QA search domain, defined in DIDimensionMPScienceQAXref.

**Table 3-43. DIFactQA**

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	Yes	Yes
qaKey	int	Yes	Yes

Table 3-44 The DIFactTemporalRange table stores the relation between granules and the temporal search domain, defined in DIDimensionTemporal.

**Table 3-44. DIFactTemporalRange**

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	Yes	Yes
collectionId	ID	No	Yes
minDayKey	int	No	Yes
maxDayKey	int	No	Yes
minWeekKey	int	No	Yes
maxWeekKey	int	No	Yes
minMnthKey	int	No	Yes
maxMnthKey	int	No	Yes
minYearKey	int	No	Yes
maxYearKey	int	No	Yes
sizeMB	float	No	No

Table 3-45 The DIIdentifier table contains the next available system generated unique identifier. There is a separate row in this table to generate identifiers for the DICollections, DIGranules, DIThemes, and DIBrowse tables.

Each row in this table is padded out to the 2K page size to minimize locking contention on a per row basis.

**Table 3-45. DIIdentifier (1 of 2)**

Column Name	Data Type	PK Column	Mandatory Column
identifierType	char(30)	Yes	Yes
identifierObjectType	char(30)	Yes	Yes
lastIdentifier	ID	No	Yes
lastIntIdentifier	int	No	Yes

**Table 3-45. DIIdentifier (2 of 2)**

Column Name	Data Type	PK Column	Mandatory Column
lastSmallintIdentifier	smallint	No	Yes
identifierPad1	char(255)	No	Yes
identifierPad2	char(255)	No	Yes
identifierPad3	char(255)	No	Yes
identifierPad4	char(255)	No	Yes
identifierPad5	char(255)	No	Yes
identifierPad6	char(255)	No	Yes
identifierPad7	char(255)	No	Yes

Table 3-46 The DIUpdGranulesTemp table is temp permanent table, which will get the data from a flat file using the Sybase Bulk Copy Utility for the Update Granule Expiration utility.

**Table 3-46. DIUpdGranulesTemp**

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	No	Yes
ExpirationDate	datetime	No	Yes
RetentionPriority	int	No	No

Table 3-47 The DIXMLFilesToInsert table holds Non-ECS granule data for the Batch Insert utility.

**Table 3-47. DIXMLFilesToInsert**

Column Name	Data Type	PK Column	Mandatory Column
processId	int	Yes	Yes
xmlFileName	varchar(255)	Yes	Yes
ShortName	char(8)	No	No
VersionId	tinyint	No	No

Table 3-48 The DIECSIdsToInsert table holds the granules from Science Data Server for the Batch Insert utility.

**Table 3-48. DIECSIdsToInsert**

Column Name	Data Type	PK Column	Mandatory Column
processId	int	Yes	Yes
ecsId	ID	Yes	Yes

Table 3-49 The DIHEGLookup table holds all collections that allow HEG conversion.

**Table 3-49. DIHEGLookup**

Column Name	Data Type	PK Column	Mandatory Column
ShortName	char(8)	Yes	Yes
VersionId	tinyint	Yes	Yes

Table 3-50 The DICartOrder table contains order information for HEG conversion orders that initiated through the Data Pool Web Access GUI.

**Table 3-50. DICartOrder**

Column Name	Data Type	PK Column	Mandatory Column
orderId	ID	Yes	Yes
email	varchar(255)	No	Yes
realName	varchar(255)	No	No
status	varchar(10)	No	No
timestamp	datetime	No	No
notes	varchar(255)	No	No
insertDate	datetime	No	No
archiveFlag	char(1)	No	Yes

Table 3-51 The DICartOrderItem table contains order item information for HEG conversion orders that initiated through the Data Pool Web Access GUI.

**Table 3-51. DICartOrderItem**

Column Name	Data Type	PK Column	Mandatory Column
itemId	ID	Yes	Yes
orderId	ID	No	Yes
inputFile	varchar(255)	No	Yes
outputProj	varchar(10)	No	No
outputFmt	varchar(10)	No	No
ul_lat	float	No	No
ul_lon	float	No	No
lr_lat	float	No	No
lr_lon	float	No	No
status	varchar(10)	No	No
errorCode	int	No	No
granuleId	ID	No	No
projParamStr	varchar(255)	No	No
subsetFlag	char(1)	No	Yes
compAlgorithmLabel	char(10)	No	No

Table 3-52 DIQAUpdFlagTemp is a temporary table to hold QA flags to be updated and their values

**Table 3-52. DIQAUpdFlagTemp**

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	No	Yes
ParameterName	varchar(40)	No	Yes
xmlUpdateFlag	char(1)	No	No
qaFlagType	varchar(11)	No	No
qaValue	varchar(25)	No	No
qaExplValue	varchar(255)	No	No

Table 3-53 The DIRecoveryParameters table contains information about the various parameters and its values to be used in Data Pool Cleanup Utility.

**Table 3-53. DIRecoveryParameters**

Column Name	Data Type	PK Column	Mandatory Column
utilityName	varchar(40)	Yes	Yes
parameterName	varchar(50)	Yes	Yes
parameterValue	varchar(255)	No	Yes

Table 3-54 QA Update utility will first load this table using Sybase Bulk Copy Utility for the final population of DIQAUpdFlagTemp table.

**Table 3-54. DIQAUpdTempBcp**

Column Name	Data Type	PK Column	Mandatory Column
ecsId	ID	No	Yes
ParameterName	varchar(40)	No	Yes
xmlUpdateFlag	char(1)	No	No
qaFlagType	varchar(11)	No	No
qaValue	varchar(25)	No	No
qaExplValue	varchar(255)	No	No

Table 3-55 DIFileSystems contains the file system information for Data Pool staging area.

**Table 3-55. DIFileSystems (1 of 2)**

Column Name	Data Type	PK Column	Mandatory Column
fileSystemLabel	char(10)	Yes	Yes
absoluteFileSystemPath	varchar(255)	No	Yes
fileSystemPath	varchar(255)	No	No
freeSpaceMB	int	No	Yes
availabilityFlag	char(1)	No	Yes
availabilityFlagLastUpdate	datetime	No	No
freeSpaceFlag	char(1)	No	Yes
freeSpaceFlagLastUpdate	datetime	No	No
insertTime	datetime	No	Yes
insertStatus	varchar(30)	No	No
ingestStatus	varchar(30)	No	No
lastUpdate	datetime	No	No

**Table 3-55. *DIFileSystems* (2 of 2)**

Column Name	Data Type	PK Column	Mandatory Column
fileSystemID	numeric(9)	No	Yes
consumedSpace	tinyint	No	No
freeSpaceChecked	datetime	No	No
freeSpaceGB	int	No	Yes

Table 3-56 DICompressionAlgorithms contains all the compression algorithms that are used by DataPool.

**Table 3-56. *DICompressionAlgorithms***

Column Name	Data Type	PK Column	Mandatory Column
compAlgorithmLabel	char(10)	Yes	Yes
compCmd	varchar(255)	No	Yes
decompCmd	varchar(255)	No	No
defaultFileExtension	char(10)	No	No
activeFlag	char(1)	No	Yes
lastUpdate	datetime	No	No
insertTime	datetime	No	Yes

Table 3-57 DICloudCoverSource contains all the cloud cover source that used by DataPool.

**Table 3-57. *DICloudCoverSource***

Column Name	Data Type	PK Column	Mandatory Column
cloudSourceId	ID	Yes	Yes
sourceName	varchar(40)	No	Yes
sourceDescription	varchar(255)	No	No
sourceType	char(1)	No	Yes

Table 3-58 DIGrCloudCover contains the cloud cover percentage for a granule

**Table 3-58. *DIGrCloudCover***

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	Yes	Yes
cloudCover	int	No	Yes

Table 3-59 DIGranuleTiles contains the list of spatial keys for a granule in HEX format.

**Table 3-59. *DIGranuleTiles***

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	Yes	Yes
collectionId	ID	No	Yes
insertTime	datetime	No	Yes
tiles	varbinary(800)	No	Yes
gridLevel	tinyint	No	Yes

Table 3-60 DIESDTCURRENTDensityMap contains the HEX representation of a density map for a collection.

**Table 3-60. *DIESDTCURRENTDensityMap***

Column Name	Data Type	PK Column	Mandatory Column
collectionId	ID	Yes	Yes
lastUpdate	datetime	No	No
densityMap	image	No	Yes
lastUpdatedUtility	char(1)	No	Yes

Table 3-61 DIOMSGranules contains all the granules that are come from OMS requests. It uses between the OMS and the cleanup utility to figure out who owns the row.

**Table 3-61. *DIOMSGranules***

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	Yes	Yes
ecslId	ID	No	No
granuleType	char(2)	Yes	Yes
owner	char(1)	No	No
lockId	varchar(255)	No	No
lastUpdate	datetime	No	No

Table 3-62 DICartOrderItemBand contains the band information for an order item.

**Table 3-62. DICartOrderItemBand**

Column Name	Data Type	PK Column	Mandatory Column
itemId	ID	No	Yes
objectId	ID	No	Yes
bandId	ID	No	No
bandValue	int	No	No
dimId	ID	No	No
dimValue	int	No	No

Table 3-63 DIHdfObjects contains the HDF object information

**Table 3-63. DIHdfObjects**

Column Name	Data Type	PK Column	Mandatory Column
objectId	ID	Yes	Yes
objectName	varchar(255)	No	Yes
objectType	varchar(60)	No	Yes

Table 3-64 DIHdfBands contains the HDF band information.

**Table 3-64. DIHdfBands**

Column Name	Data Type	PK Column	Mandatory Column
bandId	ID	Yes	Yes
fieldName	varchar(255)	No	Yes
bandName	varchar(255)	No	Yes
bandSize	int	No	Yes

Table 3-65 DIHdfFields contains the HDF field information.

**Table 3-65. DIHdfFields**

Column Name	Data Type	PK Column	Mandatory Column
fieldId	ID	Yes	Yes
fieldName	varchar(255)	No	Yes

Table 3-66 DIHdf4thDimensions contains the 4<sup>th</sup> dimension information of a HDF object.

**Table 3-66. DIHdf4thDimensions**

Column Name	Data Type	PK Column	Mandatory Column
dimId	ID	Yes	Yes
dimName	varchar(255)	No	Yes
dimSize	int	No	Yes

Table 3-67 DIGranuleHdfObjectsXref contains the band subset information for a granule

**Table 3-67. DIGranuleHdfObjectsXref**

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	No	Yes
objectId	ID	No	Yes
bandId	ID	No	No
dimId	ID	No	No
fieldId	ID	No	No

Table 3-68 The DINOSELookup table holds all collections that are NOSE data type. This table uses to fill out the gridLevel for NOSE collections in DICollections.

**Table 3-68. DINOSELookup**

Column Name	Data Type	PK Column	Mandatory Column
ShortName	char(8)	Yes	Yes
VersionId	tinyint	Yes	Yes
platformShortName	varchar(20)	No	Yes
instrumentName	varchar(80)	No	Yes

Table 3-69 The DIStatGroupESDT table contains all groupESDT Key space and the total number of granules that the group or ESDT contains.

**Table 3-69. DIStatGroupESDT**

Column Name	Data Type	PK Column	Mandatory Column
groupESDTKey	int	No	Yes
number	int	No	Yes

Table 3-70 The DIStatESDT table contains all groupESDT Key space and the total number of granules that the ESDT contains.

**Table 3-70. DIStatESDT**

Column Name	Data Type	PK Column	Mandatory Column
groupESDTKey	int	No	Yes
groupESDTType	char(1)	No	Yes
number	int	No	Yes
size	float	No	Yes

Table 3-71 The DIStatTheme table contains a list of themes and the total number of granules that each theme contains.

**Table 3-71. DIStatTheme**

Column Name	Data Type	PK Column	Mandatory Column
themeld	ID	No	Yes
number	int	No	Yes

Table 3-72 The DIAgingConfig table stores the global aging policy used to describe how the dispatch priority of a granule changes over time.

**Table 3-72. DIAgingConfig**

Column Name	Data Type	PK Column	Mandatory Column
AgingConfigId	Numeric/Identity	Yes	Yes
MaxPriLevel	float	No	No
agingStep	float	No	No
ECSPriority	char(15)	No	No
IntPriority	tinyint	No	No

Table 3-73 The DIHEGOptions table stores all HEG options relate to format, projections, and subsetting.

**Table 3-73. DIHEGOptions**

Column Name	Data Type	PK Column	Mandatory Column
optionId	int	Yes	Yes
optionType	varchar(20)	No	Yes
optionName	varchar(80)	No	Yes

Table 3-74 The DIHEGOptionLabel table stores the label name for each HEG options.

**Table 3-74. DIHEGOptionLabel**

Column Name	Data Type	PK Column	Mandatory Column
optionId	int	Yes	Yes
labelName	varchar(80)	No	Yes

Table 3-75 The DIHEGOptionCollXref table stores the available static HEG options for each ESDT.

**Table 3-75. DIHEGOptionCollXref**

Column Name	Data Type	PK Column	Mandatory Column
collectionId	ID	Yes	Yes
optionId	int	Yes	Yes
required	char(1)	No	Yes

Table 3-76 The DIHEGExceptions table stores a list of HEG exceptions base on the specific option.

**Table 3-76. DIHEGExceptions**

Column Name	Data Type	PK Column	Mandatory Column
exceptionId	int	Yes	Yes
formatId	int	No	No
projectionId	int	No	No
subsetId	int	No	No
resamplingId	int	No	No
subsamplingId	int	No	No
stitchingId	int	No	No
resolutionId	int	No	No
exceptionType	char(1)	No	No
message	varchar(255)	No	No

Table 3-77 The DIHEGExceptionCollXref table stores the available exception for HEG options for each ESDT.

**Table 3-77. DIHEGExceptionCollXref**

Column Name	Data Type	PK Column	Mandatory Column
collectionId	ID	Yes	Yes
exceptionId	int	Yes	Yes

Table 3-78 The DIGranuleOWS table contains granules that are registered with OGC Web Services, OWS.

**Table 3-78. DIGranuleOWS**

Column Name	Data Type	PK Column	Mandatory Column
geoid	varchar(30)	Yes	Yes
granuleId	ID	No	Yes
serviceRequested	char(1)	No	Yes
processingState	varchar(10)	No	No
lastUpdate	datetime	No	No

Table 3-79 The DIOWSDeletedGranules table contains granules that have been deleted from the Data Pool database but are still registered with OGC Web Services, OWS.

**Table 3-79. DIOWSDeletedGranules**

Column Name	Data Type	PK Column	Mandatory Column
geoid	varchar(30)	Yes	Yes
expirationDate	datetime	No	Yes
serviceRequested	char(1)	No	Yes

Table 3-80. The DIAdAlert table contains information about alerts that have been raised for resources such as file systems, service hosts, and archives.

**Table 3-80. DIAdAlert**

Column Name	Data Type	PK Column	Mandatory Column
ResourceId	varchar(64)	Yes	Yes
RaiseTime	datetime	Yes	Yes
ClearTime	datetime	No	No
RaiseReason	varchar(255)	No	Yes
ClearReason	varchar(255)	No	No

Table 3-81. The DIAdMessages table contains granules that have been deleted from the Data Pool database but are still registered with OGC Web Services, OWS.

**Table 3-81. DIAdMessages**

Column Name	Data Type	PK Column	Mandatory Column
MessageID	numeric(7)	Yes	Yes
MessageName	varchar(30)	No	Yes
Arg1	varchar(255)	No	No
Arg2	varchar(255)	No	No
Arg3	varchar(255)	No	No
SubmitTime	datetime	No	Yes
CompletionTime	datetime	No	No
CompletionMessage	varchar(255)	No	No

Table 3-82. The DIBulkWrkTable table contains information of a list of Bulk URL ids.

**Table 3-82. DIBulkWrkTable**

Column Name	Data Type	PK Column	Mandatory Column
clientId	ID	No	Yes
granuleId	ID	No	Yes

Table 3-83. The DIPrivateCollection table contains granules that have been deleted from the Data Pool database but are still registered with OGC Web Services, OWS.

**Table 3-83. DIPrivateCollection**

Column Name	Data Type	PK Column	Mandatory Column
ShortName	char(8)	Yes	Yes
VersionId	tinyint	Yes	Yes

### 3.1.3 Columns

Brief definitions of each of the columns present in the database tables defined above are contained in Table 3-84.

**Table 3-84. Column Descriptions (1 of 28)**

Column Name	Table	Column Description	Valid Values
absoluteFileSystemPath	DIFileSystems	The absolute path includes the FTP root path and the file system path.	
accessTime	DIGranuleAccess DIFtpAccessLog DIWebAccessLog	The time at which the file was accessed through FTP or Web	
accessType	DIGranuleaccess DIAccessRollup	The type of access log for this process.	FTP – any ftp access http – any web access
actionSource	DllInsertActionQueue	Indicates if the action is coming from the Spatial Subscription Server, Data Pool Batch Insert Utility or request from Order Manager. Valid values are:	B – Batch Insert S – Subscription O – OMS request
activeFlag	DICompressionAlgorithms	Flag indicates whether the compression algorithm is active.	Y – compression algorithm active (default) N – compression algorithm is not active
age	DIGranuleAccess	The difference between the time at which the file was accessed through FTP or Web and the time at which the file was inserted into Data Pool	
AgingConfigId	DIAgingConfig	Unique identifier for a aging policy	
agingStep	DIAgingConfig	Number of steps to promote the request for the aging policy.	
archiveFlag	DICartOrder	Flag used to determine whether delete have been performed on the order	Y – Delete had performed on the order N – Delete had not performed on the order (default)
archiveHost	DllInsertActionQueue	Indicate which archive host to use for copying the file into Data Pool.	
archiveNeeded	DIGranules, DIBrowse	Indicates whether the granule should also be placed in the archive.	Y – archive required
archiveTimeStamp	DIGranules, DIBrowse	The time when archiving occurred.	

**Table 3-84. Column Descriptions (2 of 28)**

Column Name	Table	Column Description	Valid Values
Arg1	DIAdMessages	This column provides storage for an optional message argument. If the message requires no arguments, this column may be null.	
Arg2	DIAdMessages	This column provides more storage for an optional message argument. If Arg1 is null, this must also be null	
Arg3	DIAdMessages	This column provides more storage for an optional message argument. If Arg2 is null, this must also be null	
attributeName	DIProcAttributes	The name of the attribute which is used to look up its value.	
AutomaticQualityFlag	DIMeasuredParameter	Automatic Quality value for the granule	
AutomaticQualityFlag Explan	DIMeasuredParameter	Explanation for how to figure out the automatic quality value.	
availabilityFlag	DIFileSystems	Flag indicates whether the file system is available	Y – file system available (default) N – file system is unavailable
availabilityFlagLastUpdate	DIFileSystems	The last time that the availability flag updated.	
bandId	DIHdfBands DICartOrderItemBand DIGranuleHdfObjectsXref	Unique identifier for the 3 <sup>rd</sup> dimension in a field in a HDF-EOS object	
bandName	DIHdfBands	Name of the 3 <sup>rd</sup> dimension in a field	
bandSize	DIHdfBands	Size of 3 <sup>rd</sup> dimension in the field	
bandValue	DICartOrderItemBand	The value for the 3 <sup>rd</sup> dimension in a HDF-EOS object	

**Table 3-84. Column Descriptions (3 of 28)**

Column Name	Table	Column Description	Valid Values
batchLabel	DlInsertActionQueue	Batch label that is associated with a batch insert.	
BoundingRectangle	DIBoundingRectangle	A SQS type llbox representation of the spatial area for the granule.	
BR_Degree	DIDimensionSpatialT6All	The value of the geographical location	
BrowseDescription	DIBrowse	Description of the browse granule	
browseld	DIBrowse DIBrowseFile DIGranuleBrowseXref DIFilesToDelete	The unique ID which identifies the browse granule	
bulkExportedFlag	DICollections	Flag used to determine whether the collection allows for exporting metadata by the ECHO Access to Data Pool utility.	Y – export to ECHO (default) N – do not export to ECHO
charValue	DIConfig DIProcAttributes	The value of the parameter which has data type of character.	
ClearReason	DIAdAlert	Text message giving the reason for clearing the alert, null if ClearTime is null.	
ClearTime	DIAdAlert	Clear time for the alert, not cleared if null.	
clientId	DIBulkWrkTable	Bulk URL client ID	
cloudCover	DIGrCloudCover	The percentage for cloud cover.	
cloudSourceId	DICollections DICloudCoverSource	ID uses to indicate which cloud cover source that the collection uses.	

**Table 3-84. Column Descriptions (4 of 28)**

Column Name	Table	Column Description	Valid Values
CollectionDescription	DICollections	Description of ECS collection	
collectionId	DICollections DIGranules DIGranuleTiles DIESDTCurrentDensityMap DIFactTemporalRange DIHEGOptionCollXref DIHEGExceptionCollXref DIBmgtEvents	Identifier for each collection	
CollGrpDescription	DICollectionGroup	Description of an ECS collection group	
compAlgorithmLabel	DICompressionAlgorithms DICollections DICartOrderItem DIFile	Label uses to indicate which compression algorithm to use.	
compChksum	DIFile	Checksum computed for compressed file	
compCmd	DICompressionAlgorithms	The command for a compression algorithm with full path.	
compFileSize	DIFile	The size of the compressed file.	
CompletionMessage	DIAdMessages	Text messages for the server message was processed.	
CompletionTime	DIAdMessages	The time at which the server message was processed.	
completionTime	DIIInsertActionQueue	The time that the action was completed. It contains the value NULL until the action status is either DONE or FAILED.	
compTimeInSec	DIFile	Time in seconds it took to compress the file	
consumedSpace	DIFileSystems	Percentage of a file system that is in use.	
convertEnabledFlag	DICollections	Flag use to determine whether the collection is allowed for HEG conversion.  Y – allow HEG conversion N – do not allow HEG conversion (default)	
cycleId	DIBmgtEvents	Identifier for the current processing cycle	

**Table 3-84. Column Descriptions (5 of 28)**

Column Name	Table	Column Description	Valid Values
dayNight	DICollections	Flag uses to indicate whether the collection has day night coverage.	Y – has dayNight coverage (default) N – does not have dayNight coverage
dayNightDescription	DIDimensionDayNight	Description for each dayNighValue	
DayNightFlag	DIGanules	Flag indicating whether the granule was acquired during the day, the night, or both	
dayNightKey	DIDimensionDayNight DIFactDayNight	Uniquely Identifies a condition of the day when the granule acquisition occurred.	
dayNightValue	DIDimensionDayNight	The value represented by the key.	D – Day N – Night B – Both X – Not Compatible
dbld	DIGranuleSubscription DIGranuleAccess	The unique ID which identifies the granule.	
decompCmd	DICompressionAlgorithms	The associated decompress command for the compression algorithm with full path.	
defaultFileExtension	DICompressionAlgorithms	The default file extension uses for the compressed file after the granule file compressed.	
densityMap	DIESDTCurrentDensityMap	The HEX representation of the density map	
dimId	DIHdf4thDimensions DICartOrderItemBand DIGranuleHdfObjectsXref	Unique identifier for the 4 <sup>th</sup> dimension in a field in a HDF-EOS object.	
dimName	DIHdf4thDimensions	Name of the 4 <sup>th</sup> dimension in the field	
dimSize	DIHdf4thDimensions	Size of the 4 <sup>th</sup> dimension in the field	
dimValue	DICartOrderItemBand	The value for the 4 <sup>th</sup> dimension in a HDF-EOS object.	

**Table 3-84. Column Descriptions (6 of 28)**

Column Name	Table	Column Description	Valid Values
directoryPath	DIFile DIBrowseFile DIFilesToDelete DIFtpAccessLog DIWebAccessLog DITempPhantoms	Path Name of the browse granule files relative to the Data Pool root directory.	
dispatchPriority	DIInsertActionQueue	Dispatch priority for a granule in the queue.	
displayName	DCollectionGroup	Group name uses to display on Web Drill Down page.	
domainName	DIFtpAccessLog DIWebAccessLog DIGranuleAccess	Domain name of the client	
EcDbComments	EcDbDatabaseVersions	Notes or comments on the database version level.	
EcDbCurrentVersion Flag	EcDbDatabaseVersions	Flag indicating if this row represents the current database version entry	
EcDbDatabaseName	EcDbDatabaseVersions	The name of the database for which this database version level is applied.	
EcDbDropDescription	EcDbDatabaseVersions	The official name of the ECS software drops for	
EcDbDropInstallDate	EcDbDatabaseVersions	The date and time that the database version level was installed.	
EcDbDropVersion	EcDbDatabaseVersions	The official description of the ECS software drops for this database version level.	
EcDbSchemaVersion Id	EcDbDatabaseVersions	The subsystem-specific identifier for this database schema version	
EcDbSybaseServer	EcDbDatabaseVersions	The name of the baseline Sybase SQL server controlling this database.	
EcDbSybaseVersion	EcDbDatabaseVersions	The software release version of the Sybase SQL server in place when this database version level was initially installed.	

**Table 3-84. Column Descriptions (7 of 28)**

Column Name	Table	Column Description	Valid Values
EcDbUpdateProcess	EcDbDatabaseVersions	The installation method by which this database version level was installed.	
ecsFlag	DICollectionGroup	Flag used to identify whether the collection group is ECS or non-ECS.	Y – ECS N – Non-ECS
ecslid	DIActiveInsertProcesses DIGranules DIBrowse DIFilesToDelete DIOMSGranules DIQAUdpTempBcp DIGranuleAccess DllInsertActionQueue DIECSIdsToInsert DIBmgtEvents	The ID that identifies the ECS browse granule. It matches the browse id in SDSRV database. The unique ID which identifies the granule. It matches the dbID in the ECS Science Data Server (SDSRV) database.	
ecsInsertTime	DIGranules DIBrowse	Time when the granule was inserted into ECS	
ECSPriority	DAgingConfig	Priority for the ECS request before gets into the DPL	
email	DICartOrder	Email Id	
EndBlock	DOOrbitCalculatedSpatial	The ordinal number of the polygon where granule coverage ends.	
enqueueTime	DllInsertActionQueue	The time at which the action was queued.	
errorCode	DICartOrderItem	if FAILED, error code from HEG converter	
eventKey	DIBmgtEvents	Identifies a particular event	
eventTime	DIBmgtEvents	Time of an event	
eventType	DIBmgtEvents	Type of event logged	INSERT, DELETE
exceptionType	DIHEGExceptions	Value to indicate the type of exception, valid values.	"W" – warning, "E" - Error
exclusionSCFlag	DCollections	Flag used to determine whether the collection is allowed to insert Science and Metadata to Data Pool or Metadata only.	Y – Metadata only N – Science and Metadata (default)
ExpirationDate	DIUpdGranulesTemp	Expiration date for a granule.	

**Table 3-84. Column Descriptions (8 of 28)**

Column Name	Table	Column Description	Valid Values
expirationDate	DIGranuleExpirationPriority DIOWSDeletedGranules	Date when the granule expired.	
exceptionId	DIHEGExceptions DIHEGExceptionCollXref	Unique identifier for a HEG exception	
exported	DIBmgtEvents	Flag indicating that information has been exported	Y
externalId	DIGranules DIBrowse	The ID which identifies the Non-ECS granule.	
fieldId	DIHdfFields DIGranuleHdfObjectsXref	Id of the field in the HDF-EOS object	
fieldName	DIHdfBands DIHdfFields	Name of the field in the HDF-EOS object	
fileName	DIFile DIBrowseFile DIFilesToDelete DIFtpAccessLog DIWebAccessLog DITempPhantoms DIGranuleAccess	The file name for a science, metadata or browse file	
fileSize	DIFile DIBrowseFile DIFilesToDelete DIFtpAccessLog DIGranuleAccess	The size of the browse file stored on the Data Pool disk. The size of the file in Data Pool.	
fileSystemID	DIFileSystems	An identifying number for a file system.	
fileSystemLabel	DIFileSystems DICollections	Label uses to indicate which file system the collection belongs to.	
fileSystemPath	DIFileSystems	The file system portion of the absolute path.	
fileType	DIBrowseFile DIFile DIGranuleAccess	The type of file. The valid file type for a browse granule is BROWSE. The type of the file. The valid file types for a science granule are:	BROWSE SCIENCE METADATA
floatValue	DIConfig DIPProcAttributes	The value of the parameter which has data type of float.	
formatId	DIHEGExceptions	Identifier for a HEG's format option.	

**Table 3-84. Column Descriptions (9 of 28)**

Column Name	Table	Column Description	Valid Values
freeSpaceChecked	DIFileSystems	The last time the free space in the file system was checked.	
freeSpaceFlag	DIFileSystems	Flag indicates whether there's any space available in the file system.	Y – space is available on the file system N – no space is available on the file system
freeSpaceGB	DIFileSystems	The free space in the file system in gigabytes.	
freeSpaceFlagLastUpdate	DIFileSystems	The last time that the free space flag updated.	
freeSpaceMB	DIFileSystems	The amount of space which the Cleanup utility has to clear before resetting the freeSpaceFlag.	
Geoid	DIGranuleOWS DIOWSDeletedGranules	The unique identifier of an OWS granule.	Format is "SC:shortName.version:dbID"
global	DICollections	Flag uses to indicate whether the collection is a global collection or it contains a very large spatial coverage.	Y – has global coverage N – do not has global coverage (default)
GpolygonContainer	DIGPolygon	A SQS type gpolygon representation of the spatial area for the granule.	
granIdentifier	DIActiveInsertProcesses	Identifier for a insert process.	

**Table 3-84. Column Descriptions (10 of 28)**

Column Name	Table	Column Description	Valid Values
granuleId	DIGranules DIGranuleOWS DIGranuleTiles DIGranuleThemeXref DIGranuleHdfObjectXref DIGranuleBrowseXref DIMeasuredParameter DIGrCloudCover DIBoundingRectangle DIGPolygon DIOrbitCalculatedSpatial DIFactGroupESDT DIFactDayNight DIFactQA DIFactTemporalRange DIFactTimeOfDay DIFile DIFilesToDelete DIUpdGranulesTemp DIQAUdpFlagTemp DITempGrans DICartOrderItem DIOMSGranules DIGranuleExpirationPriority DIBulkWrkTable DIBmgtEvents	The unique ID which identifies the granule	
GranPublicFlag	DCollections	Indicates whether granules in the collection can be made public.	Y – can be public N – remain hidden
granuleType	DIOMSGranules	The two characters uses to identify the type of granule	SC – science granule BR – browse granule
gridLevel	DIDimensionPolygonXref DIDimensionSpatialT6All DCollections DIGranuleTiles	Spatial grid level uses to generate the density map. The default is 6.	Valid values are between 1 and 6 (default = 6)
groupESDTDescription	DIDimensionGroupESDT	The description for the group or ESDT.	
groupESDTKey	DIDimensionGroupESDT DIFactGroupESDT DIStatESDT DIStatGroupESDT	Uniquely Identifies a group or ESDT	

**Table 3-84. Column Descriptions (11 of 28)**

Column Name	Table	Column Description	Valid Values
groupESDTType	DIStatESDT DIDimensionGroupESDT	Identifies the type, either group or ESDT	G – Group E – ESDT
groupESDTVValue	DIDimensionGroupESDT	The value for the group or ESDT. If it is an ESDT, its value is a combination of ShortName and VersionId. If it is a collection group, its value is the displayName of the group.	
groupId	DICollectionGroup DICollections	ECS collection group ID	
groupKey	DIDimensionGroupESDT	If groupESDTType is G, this field contains the value NULL. Otherwise, the field contains the key of the group to which the ESDT belongs.	
HiddenRetTime	DICollections	The default retention time for hidden granules in this collection.	
identifierObjectType	DIIIdentifier	The name or type of the DPL database object for which the DIIIdentifier row exists.	
identifierPad1	DIIIdentifier	One of seven columns of type char(255) used to pad each row in the DIIIdentifier table to the 2K page size.	
identifierPad2	DIIIdentifier	One of seven columns of type char(255) used to pad each row in the DIIIdentifier table to the 2K page size.	
identifierPad3	DIIIdentifier	One of seven columns of type char(255) used to pad each row in the DIIIdentifier table to the 2K page size.	
identifierPad4	DIIIdentifier	One of seven columns of type char(255) used to pad each row in the DIIIdentifier table to the 2K page size.	

**Table 3-84. Column Descriptions (12 of 28)**

Column Name	Table	Column Description	Valid Values
identifierPad5	DIIIdentifier	One of seven columns of type char(255) used to pad each row in the DIIIdentifier table to the 2K page size.	
identifierPad6	DIIIdentifier	One of seven columns of type char(255) used to pad each row in the DIIIdentifier table to the 2K page size.	
identifierPad7	DIIIdentifier	One of seven columns of type char(255) used to pad each row in the DIIIdentifier table to the 2K page size.	
identifierType	DIIIdentifier	The data type of the identifier for which the DIIIdentifier row exists.	
inCacheFlag	DIIInsertActionQueue DIActiveInsertProcesses	Indicates if process is handling a granule that must be read off tape or whether the granule is in AMASS cache. Valid values are:	Y – the granule is in cache (default) N – the granule is on tape
ingestStatus	DIFileSystems	Indicates the status of the file system with respect to the ability to ingest new granules.	ACTIVE SUSPENDED SUSPENDEDBYOPERATOR
inputFile	DICartOrderItem	File in datapool archive to process	
insertDate	DICartOrder	When order was first inserted	
insertEnabledFlag	DICollections DIThemes	Flag used to determine whether granules from this collection are eligible for insertion in the Data Pool.	Y – allow Data Pool insert (default) N – do not allow Data Pool insert
insertStatus	DIFileSystems	Similar to ingestStatus, but with respect to DPAD rather than DPL Ingest.	ACTIVE SUSPENDED SUSPENDEDBYOPERATOR

**Table 3-84. Column Descriptions (13 of 28)**

Column Name	Table	Column Description	Valid Values
insertTime	DIGranules DIBrowse DIThemes DICollections DICollectionGroup DIFileSystems DICompressionAlgorithms DIGranuleTiles	The time which the row inserted.	
insQueueId	DIIInsertActionQueue	Uniquely identifies the queue entry	
instrumentName	DIPlatInstrCode DINOSELookup	The name of an instrument for the platform.	
IntPriority	DAgingConfig	Value for each aging step.	
intValue	DIConfig DIProcAttributes	The value of the parameter which has data type of integer.	
ipAddress	DIFtpAccessLog DIWebAccessLog DIGranuleAccess	IP Address of the user	
isOrderOnly	DIGranules DIBrowse	Flag indicate whether the granule is an order only granule.	Y – order only granule
itemId	DICartOrderItem DICartOrderItemBand	Unique Identifier for an item in the Cart.	
labelName	DIHEGOptionLabel	Label name for the HEG Option that uses to display on the Web Access GUI.	
lastIdentifier	DIIIdentifier	The next available uniqueness identifier available of type ID for a specific IdentifierObjectType	
lastIntIdentifier	DIIIdentifier	The next available uniqueness identifier available of type integer for a specific IdentifierObjectType.	
lastSmallintIdentifier	DIIIdentifier	The next available uniqueness identifier available of type smallint for a specific IdentifierObjectType.	

**Table 3-84. Column Descriptions (14 of 28)**

Column Name	Table	Column Description	Valid Values
lastStatusChangeTime	DIActiveInsertProcesses	Time current action last changed status.	
lastUpdate	DIGranules DIGranuleOWS DICollections DICollectionGroup DIBrowse DIGranules DICompressionAlgorithms DIESDTCurrentDensityMap DIThemes DIOMSGranules	The time which the row last updated.	
lastUpdatedUtility	DIESDTCurrentDensityMap	The utility that last updated the density map	C – cleanup utility D – density map utility T – transition utility
localGranuleId	DIGranules	The string by which the user recognizes this granule.	
lockId	DIOMSGranules	A user string provided by OMS when locking and unlocking a granule to ensure that the granule is locked and unlocked by the same owner.	
logicalLock	DILogicalLock	Used as a semaphore for the deletion of granules	
lr_lat	DICartOrderItem	Lower right latitude	
lr_lon	DICartOrderItem	Lower right longitude	
maxDayKey	DIFactTemporalRange	Maximum temporal key for granule base on temporal range from DIDimensionTemporal with temporal type day.	
MaxPriLevel	DIAgingConfig	Max Priority Level that the request promoted for the aging policy	
maxMnthKey	DIFactTemporalRange	Maximum temporal key for granule base on temporal range from DIDimensionTemporal with temporal type month.	

**Table 3-84. Column Descriptions (15 of 28)**

Column Name	Table	Column Description	Valid Values
maxWeekKey	DIFactTemporalRange	Maximum temporal key for granule base on temporal range from DIDimensionTemporal with temporal type week.	
maxYearKey	DIFactTemporalRange	Maximum temporal key for granule base on temporal range from DIDimensionTemporal with temporal type year.	
Message	DIHEGExceptions	Warning or Error message for the exception	
MessageID	DIAdMessages	Surrogate key	
MessageName	DIAdMessages	This gives the name of the message, and is used by the DPAD server to determine what action must be performed.	
metadataOnlyFlag	DIIInsertActionQueue DIActiveInsertProcesses	The flag indicates whether the action is for inserting only a metadata file for that granule, not the granule science files. Valid values are:	Y – Insert the metadata file only N – Insert science granule files and metadata file
minDayKey	DIFactTemporalRange	Minimum temporal key for granule base on temporal range from DIDimensionTemporal with temporal type day.	
minMnthKey	DIFactTemporalRange	Minimum temporal key for granule base on temporal range from DIDimensionTemporal with temporal type month.	
minWeekKey	DIFactTemporalRange	Minimum temporal key for granule base on temporal range from DIDimensionTemporal with temporal type week.	
minYearKey	DIFactTemporalRange	Minimum temporal key for granule base on temporal range from DIDimensionTemporal with temporal type year.	
mistrCamerald	DOOrbitCalculatedSpatial	SensorShortName for a MISR granule.	

**Table 3-84. Column Descriptions (16 of 28)**

Column Name	Table	Column Description	Valid Values
misrOrbitNumber	DIOrbitCalculatedSpatial	Orbit number for a MISR granule.	
misrProductVersion	DIOrbitCalculatedSpatial	ProductVersion PSA for a MISR granule.	
monthKey	DIDimensionTemporal	Null if temporalType is Y or M. If temporalType is W or D, this field is used to cross reference this row to its corresponding month row in this table; i.e., this field contains the value of temporalKey for the row where temporalType is M, and this day or week is within that month.	
moveFlag	DICollections	Flag uses to indicate whether the collection is in the process of moving to a different file system.	Y – in the process of moving N – not in the process of moving (default)
name	DIThemes	The theme name.	
NonECSFlag	DICollections	If set, indicates that granules in this collection originated outside of ECS.	
Notes	DICartOrder	Notes from operator on status of order	
number	DIStatESDT DIStatGroupESDT DIStatTheme	The total number of granules which the collection group, collection or theme contains.	
objectId	DIHdfObjects DIGranuleHdfObjectsXref DICartOrderItemBand	Unique identifier for a HDF-EOS object	
objectName	DIHdfObjects	The name of a HDF object	
objectType	DIHdfObjects	The type of a HDF object	S – Swath G – Grid
OperationalQualityFlag	DIMeasuredParameter	Operational quality flag value for a measured parameter.	
OperationalQualityFlagExplan	DIMeasuredParameter	Explanation for the operational quality flag.	
optionId	DIHEGOOptions DIHEGOOptionLabel DIHEGOOptionCollXref	Unique identifier for a HEG option.	
optionName	DIHEGOOptions	Name of the HEG Option	

**Table 3-84. Column Descriptions (17 of 28)**

Column Name	Table	Column Description	Valid Values
optionType	DIHEGOptions	Type of HEG Option.	Format, Projection, Subsetting, Resampling, Subsampling, Stitching, Resolution
Orbit	DIOrbitPolygons	A polygon type representation of an orbit spatial coverage.	
orderId	DICartOrder DICartOrderItem	Order id which the item belongs.	
orderOnlyFSLabel	DICollections	Order Only file system label	
orderOnlyGrpDirName	DICollectionGroup	Order only group level directory name	
orderOnlySNDirName	DICollections	Order only collection level directory name	
origChksum	DIFile	Checksum that generated by EcUtCopy.	
outputFmt	DICartOrderItem	Output map projection for file	
outputProj	DICartOrderItem	Output format for file – hdfEOS/geotiff	
owner	DIOMSGranules	The owner that holds the mutex for this granule	O – indicates the granule still uses by OMS C – indicates the granule is in the process of cleaning up.
parameterDescription	DIConfig	The description of the parameter	
ParameterName	DIMeasuredParameter DIQAUpdTempBcp DIQAUpdFlagTemp	Name of a measured parameter for a granule	
parameterName	DIConfig DIRecoveryParameters	The name of the configuration parameter	
parameterType	DIConfig	The data type of the parameter. The valid values are:	I – integer C – character F – float
ParameterValue	DIRecoveryParameters	The value of the parameter.	
parentPid	DIActiveInsertProcesses	The Unix pid of the parent Data Pool Action Driver (DPAD) process that created this DPIU.	

**Table 3-84. Column Descriptions (18 of 28)**

Column Name	Table	Column Description	Valid Values
PathNo	DIDimensionPolygonXref DIOrbitPolygons DIOrbitCalculatedSpatial	Orbit number.	
platformShortName	DIPlatInstrCode DINOSELookup	The short name of a platform.	
platInstrCode	DIPlatInstrCode DIOrbitPolygons DIOrbitCalculatedSpatial DIDimensionPolygonXref	A code identifying a particular platform and instrument.	
preConvertEnabledFlag	DIThemes	A flag to indicate whether the data should be converted to GeoTiff format prior to inserting the granule into the data pool.	Y – yes (pre-convert) N – no (don't pre-convert)
processId	DIActiveInsertProcesses DIECSIdsToInsert DIXMLFilesToInsert	Unix process Id for the utility.	
processState	DllInsertActionQueue	The current state of processing of a request.	R - marked for retrieval P - picked up by driver S - suspended C - completed F - failed X - canceled
procName	DIProcAttributes	The name of the stored procedure	
processingState	DIGranuleOWS DllInsertActionQueue	The current processing state of an OWS granule.	Converted, indexed, published
ProductionDateTime	DIBrowse	The time when the associated science granule was created.	
projParamStr	DICartOrderItem	List of projection parameters.	
projectionId	DIHEGExceptions	Identifier for HEG projection	
PublicPriority	DICollections	The default priority for public granules in this collection.	
PublicRetTime	DICollections	The default retention time for public granules in this collection.	
publishTime	DIGranules, DIBrowse	The time when the granule was made public.	

**Table 3-84. Column Descriptions (19 of 28)**

Column Name	Table	Column Description	Valid Values
qaCode	DIDimensionScienceQA DIDimensionMPScienceQ AXref	Uniquely Identifies a value of the Science QA flag	
qaDescription	DIDimensionMP DIDimensionScienceQA	The description for the key and the value.	
qaExplValue	DIQAUdpFlagTemp DIQAUdpTempBcp	The value for Quality Flag Explan.	
qaFlagType	DIQAUdpFlagTemp DIQAUdpTempBcp	Either ScienceQualityFlag or OperationalQualityFlag	Valid values: ScienceQualityFlag OperationalQualityFlag
qaKey	DIDimensionMP DIDimensionMPScienceQ AXref DIFactQA	Uniquely Identifies a measured parameter or the value of the Science QA flag	
qaNameKey	DIDimensionMPScienceQ AXref	This field contains the value of qaKey for the corresponding measured parameter.	
QAPercentCloudCover	DIMeasuredParameter	The quality percentage for cloud cover.	
QAPercentInterpolatedData	DIMeasuredParameter	The quality percentage for Interpolated data.	
QAPercentMissingData	DIMeasuredParameter	The quality percentage for missing data.	
QAPercentOutOfBoundsData	DIMeasuredParameter	The quality percentage for OutOfBounds data.	
qaValue	DIDimensionMP DIQAUdpFlagTemp DIDimensionScienceQA DIQAUdpTempBcp	The value for the parameter	Actual value of ScienceQualityFlag or OperationalQualityFlag
qualitySummary	DICollections	URL that displays the quality information.	
RaiseReason	DIAdAlert	Text message giving the reason for the alert.	
RaiseTime	DIAdAlert	Open time for the alert.	
RangeBeginningDate	DIGranules	Date when the granule acquisition started	
RangeBeginningTime	DIGranules	Time when the granule acquisition started	
RangeEndingDate	DIGranules	Date when the granule acquisition ended	
RangeEndingTime	DIGranules	Time when the granule acquisition ended	
realName	DICartOrder	User's real name	

**Table 3-84. Column Descriptions (20 of 28)**

Column Name	Table	Column Description	Valid Values
replacementOn	DICollections	Flag uses to indicate whether granule replacement is allowed for the collection	"Y" – granule replacement allowed "N" – granule replacement not allowed
required	DIHEGOptionCollXref	Value indicates whether the HEG option is required.	"N" – not required, (default) "A" – absolutely required, "O" – required or
requestId	DllInsertActionQueue	Request ID from OMS.	
requestSuspendFlag	DllInsertActionQueue	Flag uses to indicate whether the request suspended.	
resolutionId	DIHEGExceptions	Identifier for HEG resolution option.	
resamplingId	DIHEGExceptions	Identifier for HEG resampling option.	
ResourceID	DIAdAlert	Label of the resource for which the alert was raised.	
retentionPeriod	DIActiveInsertProcesses DllInsertActionQueue	The retention period associated with this subscription.	
RetentionPriority	DIUpdGranulesTemp	Retention Priority for a granule, uses to indicate how long that a granule is retained in Data Pool.	Valid values between 1 and 255
retentionPriority	DIActiveInsertProcesses DllInsertActionQueue DIGranuleExpirationPriority	Priority of the granule in the Data Pool database	Valid values between 1 and 255
retryCount	DIActiveInsertProcessses DllInsertActionQueue	Counts the number of retries for the action.	
rollupBeginningDateTime	DIAccessRollup	The starting time at which Data Pool accesses are extracted from the ftp or web logs.	
rollupEndingDateTime	DIAccessRollup	The ending time at which Data Pool accesses are extracted from the ftp or web logs.	
ScienceQualityFlag	DIMeasuredParameter	ScienceQuality Flag for a measured parameter	

**Table 3-84. Column Descriptions (21 of 28)**

Column Name	Table	Column Description	Valid Values
ScienceQualityFlagExplan	DIMeasuredParameter	Explanation of the Science Quality Flag	
SequenceNo	DIDimensionPolygonXref DIOrbitPolygons	The sequence of the polygon for a MISR orbit granule.	
serviceRequested	DIGranuleOWS DIOWSDeletedGranules DIThemes	The OWS services for which a granule is registered.	M (registered with WMS), C (registered with WCS), B (registered with both WMS and WCS), null (not registered)
ShortName	DIBulkWrkTable DICollections DIGranules DIIInsertActionQueue DIFilesToDelete DIActiveInsertProcesses DINOSELookup DIHEGLookup DIXMLFilesToInsert	ECS collection short name	
size	DIStatESDT	The total size of all granules for the collection.	
sizeMB	DIGranules DIFactTemporalRange	The granule size in MB	
sourceDescription	DICloudCoverSource	The cloud cover source description	
sourceName	DICloudCoverSource	The name used to identify the cloud cover source.	
sourceType	DICloudCoverSource	Cloud cover source type	P – PSA C – Core Metadata
spatialKey	DIDimensionSpatialT6All DIDimensionPolygonXref	Uniquely identifies a geographical location tile.	
spatialSearchType	DICollections	Type of spatial search associated with the collection (e.g. Orbit, Gpolygon, Rectangle)	Valid values “Orbit,” “Rectangle,” “Gpolygon,” “Point,” “Circle,” “Not Supported,” and “Unknown” (default)

**Table 3-84. Column Descriptions (22 of 28)**

Column Name	Table	Column Description	Valid Values
specialActionFlag	DIFtpAccessLog DIGranuleAccess	This flag will determine the format of the file. Valid values are	CT - Compressed & tar UT - Uncompressed & tar T - Tar _ - No action
StartBlock	DIOrbitCalculatedSpatial	The ordinal number of the polygon where granule coverage starts. It points to the polygons covering this orbit in DIOrbitPolygons.	
startTime	DIActiveInsertProcesses	Time current action was dispatched.	
State	DIFilesToDelete	The status of cleaning up a granule.	0 – successfully deleted (default) 1 – not deleted
status	DIIinsertActionQueue	The current status of the action.	NULL – the action was not yet processed COMPLETE – the action is done FAILED – the action is failed RETRY – the action is retried NOTINIT – the action is not initiated CANCELED – the action was canceled by the operator

**Table 3-84. Column Descriptions (23 of 28)**

Column Name	Table	Column Description	Valid Values
status	DIActiveInsertProcesses	The current status of the current process.	STARTING – process was initialized and has started to process a Data Pool insert. PROCESSING – the current process is in process LOCATING GRANULE FILES – looking for science granule files LOCATING BROWSE FILES – looking for browse granule files COPYING GRANULES FROM AMASS – copy science granules from the AMASS host GENERATING XML FILE – generating the metadata file in XML format MOVING GRANULE TO DATA POOLS – copy granule into Data Pool COPYING SDSRV INVENTORY – copy metadata from the SDSRV database

**Table 3-84. Column Descriptions (24 of 28)**

Column Name	Table	Column Description	Valid Values
status	DIActiveInsertProcesses	(The current status of the current process.)	POPULATING THE DATA WAREHOUSE – populating all the fact tables PROCESSING BROWSE XREF – generate cross-reference between science granule and browse granule MOVING BROWSE TO DATA POOLS – copy browse granules into Data Pool COPYING BROWSE FROM AMASS – copy browse granule from the AMASS host EXTRACTING JPEGS – extra the jpeg from the browse file UPDATING BROWSE INVENTORY – update the browse inventory data in Data Pool database CREATING BROWSE LINKS – create links for browse file

**Table 3-84. Column Descriptions (25 of 28)**

Column Name	Table	Column Description	Valid Values
status	DICartOrder	The current status of the order	<NULL>- order just entered into system ENTERED - order ready for HEG processing PROCESSED – order processed by HEG PACKAGING - order is now being packaged DONE – order complete (user notified if necessary) FAILOPER – order failed – operator should be notified FAILOPERN - order failed – operator has been notified FAILED- order is failed – cannot retry
status	DICartOrderItem	status (of individual file)	
statusDetail	DIIInsertActionQueue	Detailed explanation of the status.	
stitchingId	DIHEGExceptions	Identifier for HEG stitching	
subId	DIGranuleSubscription DIIInsertActionQueue	The ID of a subscription that caused the insertion of the granule in the Data Pool. This is a cross-reference to the Spatial Subscription Server database.	
SubmitTime	DIAdMessages	The time at which the server message was inserted.	
subsamplingId	DIHEGExceptions	Identifier for HEG sub sampling	
subsetId	DIHEGExceptions	Identifier for HEG subsetting option.	
subsetFlag	DICartOrderItem	Flag uses to indicate whether the order requires subsetting.	
tapeLabel	DIIInsertActionQueue	Indicate which tape to use.	
temporalBeginDate	DIDimensionTemporal	The beginning time for the date range	

**Table 3-84. Column Descriptions (26 of 28)**

Column Name	Table	Column Description	Valid Values
temporalEndDate	DIDimensionTemporal	The ending time for the date range	
temporalKey	DIDimensionTemporal	Uniquely Identifies a date range bin	
temporalType	DIDimensionTemporal	Identifies the type of key.	D – Day W – Week M – Month Y – Year
themeDescription	DIThemes	Description of theme	
themeld	DIThemes DIGranuleThemeXref DIStatTheme DIIInsertActionQueue	The unique ID that identifies a data pool theme.	
Tile	DIDimensionSpatialT6All	The index for the geographical location	
tiles	DIGranuleTiles	The HEX representation of the list of spatial keys for a granule.	
timeOfDayBeginTime	DIDimensionTimeOfDay	The beginning time of the period	
timeOfDayEndTime	DIDimensionTimeOfDay	The ending time of the period	
timeOfDayKey	DIDimensionTimeOfDay DIFactTimeOfDay	Uniquely identifies periods of the day	
timeOfDayType	DIDimensionTimeOfDay	Type that is used to describe a period of the day.	1 – One hour 3 – 30 minutes 4 – Four hours D – Day H – Half day
timestamp	DICartOrder	last update time/date	
todFourHourKey	DIDimensionTimeOfDay	Null if timeOfDayType is D, H, Or 4. If timeOfDayType is 1 or 3, this field is used to cross reference this row to its corresponding 4-hour row in this table; i.e., this field contains the value of timeOfDayKey for the row where timeOfDayType is 4, and the time range for that 4 hour row contains the time range for this row.	

**Table 3-84. Column Descriptions (27 of 28)**

Column Name	Table	Column Description	Valid Values
todHalfDayKey	DIDimensionTimeOfDay	Null if timeOfDayType is D or H. If timeOfDayType is 1, 3 or 4, this field is used to cross reference this row to its corresponding halfday row in this table; i.e., this field contains the value of timeOfDayKey for the row where timeOfDayType is H, and the time range for that half day row contains the time range for this row.	
todHourKey	DIDimensionTimeOfDay	Null if timeOfDayType is D, H, 4, or 1. If timeOfDayType is 3, this field is used to cross reference this row to its corresponding hour row in this table; i.e., this field contains the value of timeOfDayKey for the row where timeOfDayType is 1, and the time range for that hour row contains the time range for this row.	
transferTime	DIFtpAccessLog DIGranuleAccess	Total transfer time in seconds	
twentyFourHr	DICollections	Flag uses to indicate whether the collection has twenty four hours coverage.	Y – has twenty four hours coverage N – do not has twenty four hours coverage (default)
ul_lat	DICartOrderItem	upper left latitude	
ul_lon	DICartOrderItem	upper left longitude	
uncompChksum	DIFile	Checksum for uncompressed file, calculated on the DPL host.	
uncompChksumTypeId	DIFile	Unique Identifier for the checksum type from SDSRV DsMdChecksumType table.	1= ECS 2=CKSUM

**Table 3-84. Column Descriptions (28 of 28)**

Column Name	Table	Column Description	Valid Values
utilityName	DIRecoveryParameters	Name of the Utility	
VersionId	DIBulkWrkTable DICollections DIGranules DIIInsertActionQueue DIFilesToDelete DIActiveInsertProcesses DINOSELookup DIHEGLookup DIXMLFilesToInsert	Version of ECS collection	
versionNumber	DIGranules, DIBrowse	The suffix used to rename the root filename in case of duplicates.	
webVisibleFlag	DIThemes	Flag use to determine whether granules from this theme are eligible for web drill down in Data Pool.	Y – allow Data Pool Web Drill Down N – do not allow Data Pool Web Drill Down
weekKey	DIDimensionTemporal	Null if temporalType is Y, M, or W. If temporalType is D, this field is used to cross reference this row to its corresponding week row in this table; i.e., this field contains the value of temporalKey for the row where temporalType is W, and this day is within that week.	
xmlFileName	DIXmlFilesToInsert DIIInsertActionQueue DIActiveInsertProcesses	Location of the xml file for Non-ECS granules	
xmlUpdateFlag	DIQAUdpTempBcp DIQAUdpFlagTemp	Flag uses to determine whether the XML file had updated.	Valid Values will be 'Y' or 'N'
yearKey	DIDimensionTemporal	Null if temporalType is Y. If temporalType is M, W, or D, this field is used to cross reference this row to its corresponding year row in this table; i.e., this field contains the value of temporalKey for the row where temporalType is Y, and this day, week, or month is within that year.	

### 3.1.4 Domains

Sybase supports the definition of specific data types, domains, to further limit the format of data for given column. There are no domains defined for Data Pool.Rules

Sybase supports the definitions of rules. Rules provide a means for enforcing domain constraints on a given column.

Rule Name	Description
RetentionPriority	Value of retentionPriority is between 1 and 255.
ParameterType	Value for Parameter type column in DICConfig table. The valid values are "I", "C", "F".
fileType	Valid values are "SCIENCE", "METADATA", and "BROWSE".
gridLevel	Valid values are between 1 and 6.
sourceType	Valid values are "P" and "C"
exceptionType	Valid values are "W", "E"
processingState	Valid values are "converted", "indexed", "published"
serviceRequested	Valid values are M (registered with WMS), C (registered with WCS), B (registered with both WMS and WCS), null (not registered)

### 3.1.5 Defaults

Defaults are used to supply a value for a column when one is not defined at insert time. The defaults defined in Sybase for the DPL database are described herein.

Column Default	Default Value
spatialSearchType	Unknown
exclusionSCFlag	N
InsertEnabledFlag	Y
state	0
inCacheFlag	Y
convertEnabledFlag	N
bulkExportedFlag	Y
archiveFlag	N
gridLevel	6
subId	-1
required	N
lastUpdate	getdate()

### 3.1.6 Views

Sybase allows the definition of views as a means of limiting an application or users access to data in a table or tables. Views create a logical table from columns found in one or more tables. DataPool uses view, EMSDistFTP, for EMS extract processing, as shown in Figure 3-2a. DIMisrProcessingCriteria, formerly a table in the database, was moved to the Inventory database and exists now as a view, as shown in Figure 3-2b.

<b>EMSDistFTP_View</b>						
Object Type	View					
Columns						
NAME		Datatype		Null		
dbld		ID		No		
age		int		Yes		
fileSize		numeric(16,0)		No		
fileType		varchar(10)		No		
accessTime		varchar(18)		Yes		
ecsId		ID		Yes		
transferTime		int		Yes		
ipAddress		varchar(15)		No		
fileName		varchar(255)		Yes		
ShortName		varchar(8)		No		
VersionId		tinyint		No		
Privileges						
Object Name	Delete	Execute	Insert	References	Select	Update
EMSgroup					Y	
Dependencies						
Referenced Objects						
Object Name			Object Type			
DIGranuleAccess			TABLE			
ID			USER DATATYPE			

*Figure 3-2a. DataPool View for EMS Extract Processing*

<b>DIMisrProcessingCriteria</b>						
Object Type	View					
<b>Columns</b>						
NAME		Datatype		Null		
ShortName		char(8)		No		
VersionId		tinyint		No		
type		char(1)		No		
<b>Privileges</b>						
Object Name	Delete	Execute	Insert	References	Select	Update
datapool					Y	
<b>Dependencies</b>						
Referenced Objects						
Object Name		Object Type				
EclnDb..DsMdMisrProcessingCriteria		TABLE				

**Figure 3-2b. DataPool View for MISR Processing Criteria**

### 3.1.7 Integrity Constraints

Sybase allows the enforcement of referential integrity via the use of declarative integrity constraints. Integrity constraints allow the SQL server to enforce primary and foreign key integrity checks automatically without requiring programming. Sybase constraints support “restrict-only” operations. This means that a row can not be deleted or updated if there are rows in other tables having a foreign key dependency on that row. Cascade delete and update operations can not be performed if a declarative constraint has been used. All declarative integrity constraints defined in the DPL database are described in Tables 3-85 through 3-108.

**Table 3-85. Dependencies on Table: DICollectionGroup**

Referenced by	Primary Key	Foreign Key
DICollections	groupId	groupId

**Table 3-86. Dependencies on Table: DICollections**

Referenced by	Primary Key	Foreign Key
DIFactTemporalRange	collectionId	collectionId
DIESDTCURRENTDensityMap	collectionId	collectionId
DIGranules	collectionId	collectionId
DIHEGOPTIONCollXref	collectionId	collectionId
DIHEGEXCEPTIONCollXref	collectionId	collectionId

Table 3-87. The dependency of DIGranules on DICollections is not shown on the ERD due to space limitations. The ERDs each show a partial view of the entire system.

**Table 3-87. Dependencies on Table: DIGranules**

Referenced by	Primary Key	Foreign Key
DIGranuleExpirationPriority	granuleId	granuleId
DIGranuleBrowseXref	granuleId	granuleId
DIGranuleOWS	granuleId	granuleId
DIFile	granuleId	granuleId
DOIOrbitCalculatedSpatial	granuleId	granuleId
DIGPolygon	granuleId	granuleId
DIBoundingRectangle	granuleId	granuleId
DIMeasuredParameter	granuleId	granuleId
DIGranuleTiles	granuleId	granuleId
DIFactTemporalRange	granuleId	granuleId
DIFactQA	granuleId	granuleId
DIFactTimeOfDay	granuleId	granuleId
DIFactDayNight	granuleId	granuleId
DIFactGroupESDT	granuleId	granuleId
DIGranuleThemeXref	granuleId	granuleId
DIGrCloudCover	granuleId	granuleId
DIGranuleHdfObjectsXref	granuleId	granuleId

**Table 3-88. Dependencies on Table: DIBrowse**

Referenced by	Primary Key	Foreign Key
DIGranuleBrowseXref	browseld	browseld
DIBrowseFile	browseld	browseld

**Table 3-89. Dependencies on Table: DIPlatInstrCode**

Referenced by	Primary Key	Foreign Key
DIOrbitPolygons	platInstrCode	platInstrCode

**Table 3-90. Dependencies on Table: DIDimensionSpatialT6All**

Referenced by	Primary Key	Foreign Key
DIDimensionPolygonXref	spatialKey	spatialKey

**Table 3-91. Dependencies on Table: DIDimensionTimeOfDay**

Referenced by	Primary Key	Foreign Key
DIFactTimeOfDay	timeOfDayKey	timeOfDayKey

**Table 3-92. Dependencies on Table: DIDimensionDayNight**

Referenced by	Primary Key	Foreign Key
DIFactDayNight	dayNightKey	dayNightKey

**Table 3-93. Dependencies on Table: DIDimensionGroupESDT**

Referenced by	Primary Key	Foreign Key
DIFactGroupESDT	groupESDTKey	groupESDTKey

**Table 3-94. Dependencies on Table: DIOrbitPolygons**

Referenced by	Primary Key	Foreign Key
DIDimensionPolygonXref	platInstrCode	platInstrCode
DIDimensionPolygonXref	PathNo	PathNo
DIDimensionPolygonXref	SequenceNo	SequenceNo
DIOrbitCalculatedSpatial	platInstrCode	platInstrCode
DIOrbitCalculatedSpatial	PathNo	PathNo

**Table 3-95. Dependencies on Table: DIThemes**

Referenced by	Primary Key	Foreign Key
DIGranuleThemeXref	themeld	themeld

**Table 3-96. Dependencies on Table: DICartOrder**

Referenced by	Primary Key	Foreign Key
DICartOrderItem	orderId	orderId

**Table 3-97. Dependencies on Table: DIDimensionMP**

Referenced by	Primary Key	Foreign Key
DIDimensionMPScienceQARef	qaKey	qaNameKey

**Table 3-98. Dependencies on Table: DIDimensionScienceQA**

Referenced by	Primary Key	Foreign Key
DIDimensionMPScienceQARef	qaCode	qaCode

**Table 3-99. Dependencies on Table: DICompressionAlgorithms**

Referenced by	Primary Key	Foreign Key
DIFile	compAlgorithmLabel	compAlgorithmLabel
DICollections	compAlgorithmLabel	compAlgorithmLabel

**Table 3-100. Dependencies on Table: DIFileSystems**

Referenced by	Primary Key	Foreign Key
DICollections	fileSystemLabel	fileSystemLabel

**Table 3-101. Dependencies on Table: DICloudCoverSource**

Referenced by	Primary Key	Foreign Key
DICollections	cloudSourceld	cloudSourceld

**Table 3-102. Dependencies on Table: DIHdfObjects**

Referenced by	Primary Key	Foreign Key
DIGranuleHdfObjectsXref	objectId	objectId
DICartOrderItemBand	objectId	objectId

**Table 3-103. Dependencies on Table: DIHdfBands**

Referenced by	Primary Key	Foreign Key
DIGranuleHdfObjectsXref	bandId	bandId
DICartOrderItemBand	bandId	bandId

**Table 3-104. Dependencies on Table: DIHdfFields**

Referenced by	Primary Key	Foreign Key
DIGranuleHdfObjectsXref	fieldId	fieldId

**Table 3-105. Dependencies on Table: DIHdf4thDimensions**

Referenced by	Primary Key	Foreign Key
DIGranuleHdfObjectsXref	dimId	dimId
DICartOrderItemBand	dimId	dimId

**Table 3-106. Dependencies on Table: DICartOrderItem**

Referenced by	Primary Key	Foreign Key
DICartOrderItemBand	itemId	itemId

**Table 3-107. Dependencies on Table: DIHEGOOptions**

Referenced by	Primary Key	Foreign Key
DIHEGOOptionCollXref	optionId	optionId
DIHEGOOptionLabel	optionId	optionId

**Table 3-108. Dependencies on Table: DIHEGExceptions**

Referenced by	Primary Key	Foreign Key
DIHEGExceptionCollXref	exceptionId	exceptionId

### 3.1.8 Triggers

Sybase supports the enforcement of business policy via the use of triggers. A trigger is best defined as set of activities or checks that should be performed automatically by Sybase whenever a row is inserted, updated, or deleted from a given table. Sybase allows the definition of insert, update, and delete triggers for each table. Description of each of the triggers in the Data Pool database is given in Table 3-109. Trigger code may vary as new drops or test executables for Release 7 are installed into the implemented database. For this reason trigger code listings are no longer included in this documentation but may be reviewed on-line using the installed database.

**Table 3-109. Trigger Listing**

Table Code	Trigger Name	Trigger Type
DIBoundingRectangle	TrigUpdDIBoundingRectangle	Update
DICartOrderItem	TrigUpdCartOrderStatus	Update
DICollectionGroup	TrigInsCollectionGroup	Insert
DICollectionGroup	TrigDelCollectionGroup	Delete
DICollectionGroup	TrigUpdCollectionGroup	Update
DICollections	TrigInsCollections	Insert
DICollections	TrigDelCollections	Delete
DICollections	TrigUpdCollections	Update
DIConfig	TrigUpdDIConfig	Update
DIFile	TrigUpdDIFile	Update
DIFileSystems	TrigUpdFileSystems	Update
DIGPolygon	TrigUpdDIGPolygon	Update
DIGrCloudCover	TrigUpdDIGrCloudCover	Update
DIGranuleExpirationPriority	TrigUpdDIGranExpPriority	Update
DIGranuleTiles	TrigUpdDIGranuleTiles	Update
DIGranules	TrigInsDIGranules	Insert
DIGranules	TrigDelDIGranules	Delete
DIIInsertActionQueue	TrigInsIAQ	Insert
DIIInsertActionQueue	TrigUpdIAQ	Update
DIMeasuredParameter	TrigInsMeasuredParameter	Insert
DIMeasuredParameter	TrigUpdMeasuredParameter	Update
DIOrbitCalculatedSpatial	TrigInsOrbitCalculatedSpatial	Insert
DIOrbitCalculatedSpatial	TrigUpdOrbitCalculatedSpatial	Update
DIPrivateCollection	TrigInsPrivateColl	Insert

### 3.1.9 Stored Procedures

Sybase also includes support for business policy via the use of stored procedures. Stored procedures are typically used to capture a set of activities or checks that will be performed on the database repeatedly to enforce business policy and maintain data integrity. Stored procedures are parsed and compiled SQL code that reside in the database and may be called by name by an application, trigger or another stored procedure. A listing of each the stored procedures in the Data Pool database is given here. A brief definition of each of these stored procedures follows in Table 3-110. Stored procedure code may vary as new drops or test executables for Release 7 are installed into the implemented database. For this reason stored procedure code listings are no longer included in this documentation but may be reviewed on-line using the installed database.

**Table 3-110. Procedure Listing (1 of 27)**

Name	Description
DIGetOMSInserts	Returns the number of OMS inserts
DIGetSSSInserts	Returns the number of SSS inserts
DIPDInsertComplete	Complete data of newly inserted entries in the DIPendingDelete table
ProcBackfillBrowse	This proc updates the isOrderOnly flag in DIBrowse when move the order only browse to public.
ProcBmGetOwsDplDeleted	Returns a list of OWS granules designated for cleanup.
ProcBmGetOwsIndexedGranules	Returns a list of OWS granules that have been indexed and are ready to be published in the ECHO catalogue.
ProcBmOwsMarkPublished	Updates the processing state of newly published granules.
ProcCancelInsertQueue	Updates an insert status in the DlInsertActionQueue to "CANCELLED".
ProcCanRemoveGranule	Checks whether it is OK to remove the granule from from Data Pool.
ProcCanRemoveLinkedBrowse	Remove browse association for a specified granule.
ProcCheckCoveredRollups	Checks the previous rollupdatetime to determine whether the period of rollup had been done.
ProcCheckFreeSpace	Checks the availability of a file system for a collection.
ProcCopySdsrvOrbitInfo	Copies orbit metadata from the sdsrv database.
ProcDeleteAssocXref	Delete all rows in DIGranuleBrowseXref table that associated with granules that are about to be deleted.
ProcDeleteBndgRectangle	Delete all granules from DIBoundingRectangle table where the granule exists in DIFilesToDelete.
ProcDeleteDayNightFact	Delete from DIFactDayNight table for all granules in DIFilesToDelete.
ProcDeleteFtpAccessLog	Truncate the DIFtpAccessLog table.
ProcDeleteGPolygon	Delete all granules from DIGPolygon table where the granule exists in DIFilesToDelete.
ProcDeleteGranFiles	Delete all rows in DIFile where the file exists in DIFilesToDelete.
ProcDeleteGroupESDTFact	Delete from DIFactGroupESDT table for all granules in DIFilesToDelete.
ProcDeleteIAQOldActionItems	Remove completed actions whose completion time is older than DELETECOMPLETEACTIONSAFTER.
ProcDeleteMeasuredParameter	Delete all granules from DIMeasuredParameter table where the granule exists in DIFilesToDelete.
ProcDeleteOrbCalcSpatial	Delete all granules from DIOrbitCalculatedSpatial table where the granule exists in DIFilesToDelete.
ProcDelExpiredOWSGranules	Deletes from table DIOWSDeletedGranules.

**Table 3-110. Procedure Listing (2 of 27)**

Name	Description
ProcDelGranAccessByTimeRange	Delete access statistic data by a time range.
ProcDelGranAcsByTimeAndType	Delete access statistic data by a time range and the access type.
ProcDellInconsistentGranules	Checks for deleted OWS granules that were reinserted.
ProcDeleteProcess	Delete process entry from database and modify the queue based on completion status.
ProcDeleteProcessByEcsId	Delete process entry from database based on ECS ID and modify the queue based on completion status.
ProcDeleteProcessByXmlFileName	Delete process entry from database based on XML file name and modify the queue based on completion status.
ProcDeleteQAFact	Delete from DIFactQA table for all granules in DIFilesToDelete.
ProcDeleteRetPriority	Delete all granules from DIGranuleExpirationPriority table where the granule exists in DIFilesToDelete.
ProcDeleteSciGranules	Delete science granules that are in DIFilesToDelete.
ProcDeleteSingleGranule	Delete a single granule from Data Pool database. It uses for recovery when inserted failed.
ProcDeleteTemporalFact	Delete from DIFactTemporalRange table for all granules in DIFilesToDelete.
ProcDeleteTimeOfDayFact	Delete from DIFactTimeOfDay table for all granules in DIFilesToDelete.
ProcDeleteWebAccessLog	Truncate DIWebAccessLog table.
ProcDIAdClearAlert	Closes an open alert in the DIAdAlert table. This procedure is called when an alert is closed, either because the condition causing the alert has been corrected, or the server is restarting. An alert is considered cleared (or closed), when it has a non-null ClearTime in the database.
ProcDIAdCompleteServerMessage	Updates a server message with a completion message and time. A message is considered completed (and hence will not be processed again) when it has a non-null CompletionTime.
ProcDIAdCreateActiveInsert	Creates a row in DIActiveInsertProcesses for a new insert request. If a row already exists (for example, it is a recovery situation), then the existing data will be returned. For new rows, representing a granule that does not already exist in the Data Pool, a new, unique identifier will be created.
ProcDIAdDeleteActiveInsert	Removes a row from the DIActiveInsertProcesses table. This procedure is called when an insert terminates (successfully, or not), and is being cleaned up.
ProcDIAdGetAllRaisedAlerts	Returns the open alerts. This procedure is called during server restart, when the server must retrieve all the currently open alerts in order to close them.

**Table 3-110. Procedure Listing (3 of 27)**

Name	Description
ProcDIAdGetArchiveFileSystems	Returns the archive file system information from the Ingest database. This procedure is called once during start up.
ProcDIAdGetBrowseGranuleFiles	Returns file information for a browse granule. This procedure is designed to match the output from ProcDIAdGetScienceFiles, hence the null values in the output results set.
ProcDIAdGetDapGranuleFiles	Returns file information for a DAP granule. This procedure is designed to match the output from ProcDIAdGetScienceFiles, hence the null values in the output results set.
ProcDIAdGetDefaultCksum	Retrieves the default checksum type from the Ingest database.
ProcDIAdGetDPLFileSystems	Returns information about the Data Pool file systems. This procedure is called once during server startup.
ProcDIAdGetECSServiceHosts	Retrieves the service host configuration from the Ingest database. This procedure is called once during server startup.
ProcDIAdGetESDTs	Retrieves all the configured collections from the Data Pool database.
ProcDIAdGetGranuleFiles	Returns the files for a given Science Data server granule.
ProcDIAdGetNewPendingInserts	Retrieves new granule insert requests from the DllInsertActionQueue. This procedure is called periodically by the Action Driver.
ProcDIAdGetPhGranuleFiles	Returns file information for a Processing History granule. This procedure is designed to match the output from ProcDIAdGetScienceFiles, hence the null values in the output results set.
ProcDIAdGetQaGranuleFiles	Returns file information for a QA granule. This procedure is designed to match the output from ProcDIAdGetScienceFiles, hence the null values in the output results set.
ProcDIAdGetScienceGranuleFiles	Returns the file information for a science granule.
ProcDIAdGetServerMessages	Retrieves new server messages from the database. This procedure is called periodically by the Action Driver.
ProcDIAdGetSilos	Retrieves information about the archive silos (the old archive hosts) from the STMGT database.

**Table 3-110. Procedure Listing (4 of 27)**

Name	Description
ProcDIAdInsertChecksum	Inserts a newly computed checksum into the Science Data Server database.
ProcDIAdInsertServerMessage	Inserts a server message into the Action Driver messages table.
ProcDIAdLockGranule	Places a lock on a granule (if not already locked).
ProcDIAdRaiseAlert	Creates a row in the DIAdAlert table representing an open alert.
ProcDIAdRecoverPendingInserts	Retrieves previously executing insert requests. This procedure is called once during startup, in place of ProcDIAdGetNewPendingInserts. It resets all suspended insert requests back to the null state (so that they get reprocessed), and then selects all remaining active insert requests.
ProcDIAdRemoveClosedAlerts	Removes all closed alerts older than a given age.
ProcDIAdRemoveCompleteMessages	Removes completed server messages older than a given age.
ProcDIAdRemoveStaleGranuleLock	Removes 'stale' granule locks - those older than a configured age. Note that this procedure retrieves the age configuration directly from DIConfig, rather than accepting it as an input parameter.
ProcDIAdServerRestart	Resets the Data Pool Insert database ready for a server restart.
ProcDIAdSetACFileSystemState	Sets the state of an Archive Cache file system.
ProcDIAdSetDPLFileSystemState	Sets the status of a Data Pool file system (from the Insert perspective).
ProcDIAdSetServiceHostState	Sets the status of an ECS server host.
ProcDIAdUnlockGranule	Removes a granule lock held by the Action driver.
ProcDIAdUpdateActiveInsert	Updates the status of a granule insert in the DIActiveInsertProcesses table.
ProcDIAdUpdateQueueStatus	Update the status in DlInsertActionQueue table.
ProcDIOmRemoveStaleGranuleLock	Removes 'stale' granule locks owned by OMS those older than a configured age.
ProcGetAssocGransBrowseFiles	This procedure is used to log out the sci granules that are being removed because they have associated browse files that are missing (phantom browse in DITempPhantoms). It also returns related browseld, ecsld and the browse file name for verification purposes.

**Table 3-110. Procedure Listing (5 of 27)**

Name	Description
ProcGetCheckSumFiles	This procedure will search through the DIGranules and DIFile tables to find granules that were inserted either 1) within the last 24 hours, 2) a week ago, or 3) a month ago. It will report these files that have not had their checksumValidationStatus flag set in order to perform checksum validation.
ProcGetCheckSumFilesByEsdt	This procedure will search through the DIGranules and DIFile tables to find file names for granules that match the input ESDT and associated Version id.
ProcGetChksumTypeIid	Get the ID for a given checksum type.
ProcGetChksumTypeToIdMapping	Get the IDs for all checksum types.
ProcGetDplGranuleXmlFileN	This procedure returns the directoryPath and xml filename for the specified granuleid.
ProcGetDplIddInfo	Returns the relevant ESDT info for the provided SCIENCE dplid.
ProcGetEsdtInfo	Retrieves collection level info for a specified ESDT.
ProcGetGrFiles	Retrieves the complete file pathname for a granule, based on the granuleId.
ProcGetGranuleIdFS	Retrieves the absolute file system path for a granule, based on the granuleId.
ProcGetGranuleLockOwner	Returns the owner of the lock on the granule.
ProcGetHiddenDirForGranule	Return the full directory path for a granule.
ProcGetHiddenGranFileInfo	Return the appropriate filename information.
ProcGetInsertTotalByFilters	Get queue information base on batchLabel and status
ProcGetMissingXrefInfo	Get datapool granules that are yet to be linked to this browse or QA granule.
ProcGetPublicFileName	Retrieves the public (user) filename. Short name is used to identify which type of granule.
ProcGetPublicGranFileInfo	Return the appropriate filename information.
ProcGetSciFilesInDBByCollGroup	Get a list of science, metadata, and associated browse files for a given collection group order by directoryPath and filename.
ProcGetSciLinksInDBByCollGroup	Get a list of science, metadata, browse links, and associated browse files for a given collection group order by directoryPath and filename.
ProcGetScramFSForESDT	Get scrambled file system path for a given ESDT.
ProcGetSdsrvInsertInfo	Retrieve insertTime, lastUpdate from DsMdGranules and update eclsInsertTime in DPL.
ProcGetUniqueBrowseFileName	Determine if a browse granule filename is unique. If not, assign a number to append to it.
ProcGetUniqueFileName	Determine if a filename is unique. If not, assign a number to append to it.
ProcGetUniqueLinkName	Determine if a filename is unique. If not, assign a number to append to it. Update the versionNumber in DIGranules.

**Table 3-110. Procedure Listing (6 of 27)**

Name	Description
ProcGetXmlFilePathByEcsId	This procedure selects the file path for an XML metadata file based on the ecsId for the granule.
ProcGranuleArchived	Sets the archiveTimeStamp in DIGranules.
ProcInsActQueueBandBackfill	Inserts a record into DlInsertActionQueue, backfilling source, retention, and priority info.
ProcInsertActionQueue	Inserts a record into DlInsertActionQueue.
ProcInsertGrExpPrioHours	Insert a row into DIGranuleExpirationPriority table.
ProcInsertGranSubId	Insert DIGranuleSubscription if not already there.
ProcInsertINGESTCleanAction	Enter granule in Ingest DB for later cleaning.
ProcInsertOMSActionN	Insert a row in DlInsertActionQueue for an OMS action.
ProcIsBandInserted	Checks whether a DPL granule has band information.
ProcIsGrReplacementNeeded	Check whether granule replacement is needed.
ProcIsDplGranInDpl	Checks to see if granule is in the Data Pool.
ProcIsGranInDpl	Checks to see if granule is in the Data Pool.
ProcLockGranuleForDplInsert	Attempt to obtain a lock on a granule.
ProcLockGranuleForOMS	Inserts into table DIOMSGranules.
ProcMarkPublicationComplete	Sets the publishTime when publication is complete.
ProcMarkRegistrationComplete	Sets the insert time when registration is complete.
ProcOSGetDelURLByList	Retrieves the deleted granuleId(s) from DPL.
ProcOSGetInsURLByList	Retrieve Inserted Ftp URLs from a work table containing ecsIds of granules ingested into the Data Pool.
ProcPublishBrowseFile	Update DIBrowseFile to make the browse file public. Execute this proc in chained mode.
ProcPublishGranule	Update DIGranules to mark a granule published.
ProcPublishScienceFile	Update DIFile to make the file public. Execute this proc in chained mode.
ProcRegisterBrowseFile	Insert file details into DIBrowseFile; Execute this proc in chained mode.
ProcRegisterBrowseGranule	Register a browse granule.
ProcRegisterScienceFile	Insert file details into DIFile; Execute this proc in chained mode.
ProcRegisterScienceGranule	Insert a row into DIGranules table.
ProcRemoveAssocGranuleXrefs	Remove xrefs to a granule.
ProcRemoveGranule	Removes a granule from the database. Short name is used to identify which type of granule.
ProcRemoveGranuleBrowseXrefs	Remove xrefs to a browse granule.
ProcRemoveOriginalBrowseFile	Remove the original, hidden browse data file.
ProcSplitFileName	Splits a filename into its root and extension.
ProcUnpublishScienceFile	Updates the directory path and filename to the hidden directory path and new filename.
ProcUnpublishScienceGranule	Removes granule's metadata, updates the isOrderOnly flag, and resets the publishTime.

**Table 3-110. Procedure Listing (7 of 27)**

Name	Description
ProcUnlockGranuleForOMS	Deletes from table DIOMSGranules.
ProcUpdGranExpirOmsRequest	Synchronizes the expiration dates for all granules corresponding to a single OMS request.
ProcUpdateCheckSumStatus	This procedure will update the datapool DIFile table and set the checksumValidationStatus flag to FAILED for checksumResult of 0 or to SUCCESS for checksumResult of 1.
ProcUpdateGranuleIsOrderOnly	Set the isOrderOnly flag in DIGranules.
ProcUpdateXmlFileSize	Updates the filesize of a metadata file.
ProcGetACProcessCounts	Return max number of insert processes, insert processes that require AMASS access to cache, and processes that do not require AMASS access to cache.
ProcGetACTimeLimits	Return max time in minutes operators allow a DPIU process to complete whose files are in cache. And max time in hours operators allow a DPIU process to complete whose files are not in cache.
ProcGetActionConfig	Return action configuration values of parameter
ProcGetActiveProcesses	Retrieves all rows from the DIActiveInsertProcesses table.
ProcGetAIPList	Get all active insert processes.
ProcGetAllCollGrps	Retrieve all rows from DICollectionGroup table.
ProcGetAllConfigParms	Retrieves the value of all configuration parameters from DIConfig.
ProcGetAllowedProcesses	Retrieves rows with parameterValue of "NumOfAllowedInsertProcesses, NumOfAllowedCacheProcesses, NumOfAllowedNonCacheProcesses, RefreshRate" from the DIConfig table.
ProcGetALLOWSThemes	Returns a list of themes associated with OWS granules.
ProcGetAllCollectionsByGroupId	Returns the list of collections, opt. qualified by groupId
ProcGetBrowseFiles	Get files associated with a browse in DataPool inventory.
ProcGetBrowseLinks	Insert into DIFilesToBeDeleted all links from browse granules that are associated with science granules that qualify for deletion.
ProcGetBrowseToDelete	Select all browse links from DIFilesToBeDeleted.
ProcGetBrowseUR	Parses UR to determine whether this is a browse granule. Constructs browse UR in either case..
ProcGetCollectionDescription	Retrieves the collection description for a specific collection.
ProcGetCollections	Retrieves all collection from DICollections for a specific collection group.
ProcGetCollGrp	Retrieves a row from DICollectionGroup for a specific collection group.
ProcGetCollNotInDataPool	Retrieves the collections that are not yet in the Data Pool.

**Table 3-110. Procedure Listing (8 of 27)**

Name	Description
ProcGetDayNightKey	This procedure gathers the dayNightKey for a specific dayNight value.
ProcGetDayNightKeyMap	This procedure gathers the mapping of dayNightKey and dayNightKeyValue.
ProcGetDayNightSummary	This procedure gathers the counts of granules for each dayNightKey. All values of the dimension table are output.
ProcGetDPLGrFileInfo	Retrieves absolute file path for a science browse granule based on UR provided
ProcGetESDTSummary	This procedure gathers the counts of granules for each groupESDTKey given a groupKey
ProcGetExpiredInventory	Returns information for a list of OWS granules that have expired and have been added to DIOWSDeletedGranules.
ProcGetExtraFileInfo	Gets file info for a given ecs granule id
ProcGetFileVolumeGroup	Retrieve Volume Group related info' based on specified granule or browse id's insert time from STMGT database
ProcGetFreeSpace	Calculate the sum of the file sizes of all files that were successfully removed.
ProcGetGenericBrFileInfo	Retrieves absolute file paths for a browse granule from granule UR
ProcGetGeotiffByGeoid	Retrieves GeoTiff file information for an OWS granule.
ProcGetGranCollGroupName	Get the collection group id for the specified collection.
ProcGetGransByLimit	Insert into DlFilesToBeDeleted all files from granules which have expired and have priority less than a given limit.
ProcGetGransByTable	Populate DlFilesToBeDeleted with info for the granules in DITempGrans. This table is pre-loaded and created via the cleanup script for Data Pool.
ProcGetGranuleId	Retrieves the granuleId associated with a science file.
ProcGetGranules	Gathers the granule data associated with the all granuleId limited by max granule count.
ProcGetGroupESDTKeyMap	This procedure gathers the mapping of groupESDTKey and groupESDTValue.
ProcGetGroupESDTKeys	This procedure gathers the groupESDTKey for a specific collection.
ProcGetGroupSummary	Gathers the counts of granules for each groupKey
ProcGetIAQList	Get all insert actions that have never been processed or actions that are in retry state.
ProcGetIAQNewActions	Return all insert actions queued after this input queueid.
ProcGetInsertsSuspended	Return availabilityFlag value.

**Table 3-110. Procedure Listing (9 of 27)**

Name	Description
ProcGetLinksToDelete	Select all browse links from DIFilesToDelete.
ProcGetMaxTemporalKeys	This procedure gathers the maximum set of temporal keys given a begin date and an end date.
ProcGetMaxTimeOfDayKeys	This procedure gathers the maximum set of time of day keys given a begin time and an end time.
ProcGetMinTemporalKeys	This procedure gathers the minimum set of temporal keys given a begin date and an end date.
ProcGetMinTimeOfDayKeys	This procedure gathers the minimum set of time of day keys given a begin date and an end date.
ProcGetMonthTemporalKey	This procedure gathers the temporalKey for a specific month.
ProcGetNewInventory	Returns information for a list of OWS granules inserted within a specified time range.
ProcGetNoFreeSpace	Return NoFreeSpaceFlag value.
ProcGetNotInDataPoolDesc	Retrieves the description for a collection that has not yet been added to the Data Pool.
ProcGetOrderOnlyFilePaths	Returns the full directoryPath for order only granules
ProcGetOverallSummaries	This procedure gathers the overall count, size in MB, and percent of the Datapool DB.
ProcGetOWSFileAttributes	Retrieves collection information for a science file based on its pathname.
ProcGetProcAttributeInt	Select the integer value of a given attribute name and a store procedure name.
ProcGetQAKeys	This procedure gathers the qaKey for a specific QA parameter and it's science QA flag.
ProcGetQAParamValueKeyMap	This procedure gathers the mapping of qaKey and qaValue.
ProcGetQASummary	This procedure gathers the counts of granules for each qaKey.
ProcGetScienceAquisitionDate	Return BeginningDateTime or EndingDateTime, if the former is not present, or NULL, if both are not present for the specified granule from DsMdGranules table in SDSRV database.
ProcGetScienceGranuleFiles	Identify files associated with a science granule in SDSRV inventory.
ProcGetScienceToDelete	Select all science and metadata files that are in DIFilesToDelete.
ProcGetSdsrvBrowseGranule	Retrieve associated browse granule for the specified science granule from SDSRV inventory.
ProcGetTempDayNightSummary	This procedure gathers the counts of granules for each dayNightKey given a vector of granuleIds. All values of the dimension table are output
ProcGetTempESDTSummary	This procedure gathers the counts of granules for each groupESDTKey given a vector of granuleIds and a groupKey.

**Table 3-110. Procedure Listing (10 of 27)**

Name	Description
ProcGetTempGranules	This procedure gathers the granule data associated with the given vector of granuleIds.
ProcGetTempGroupSummary	This procedure gathers the counts of granules for each groupKey given a vector of granuleIds.
ProcGetTemporalSummary	This procedure gathers the counts of granules for each temporalKey given a vector of granuleIds and monthKey.
ProcGetTemporalSummaryESDT	This procedure gathers the counts of granules for each temporalKey given an ESDT.
ProcGetTemporalSummaryMkey	This procedure gathers the counts of granules for each temporalKey given a month key.
ProcGetTempOverallSummaries	This procedure gathers the overall count, size in MB, and percent of the Datapool DB for a vector of granuleIds.
ProcGetTempQASummary	This procedure gathers the counts of granules for each qaKey given a vector of granuleIds.
ProcGetTempTemporalSummary	This procedure gathers the counts of granules for each temporalKey given a vector of granuleIds and monthKey.
ProcGetTempTimeOfDaySummary	This procedure gathers the counts of granules for each timeOfDayKey given a vector of granuleIds.
ProcGetTimeOfDaySummary	This procedure gathers the counts of granules for each timeOfDayKey.
ProcGetTotalInsertQueue	Retrieves the total inserts that have not been processed or whose status is not “FAILED”, “CANCELLED”, or “DONE” in the DIInsertActionQueue table.
ProcGetUnconvertedFiles	Returns a list of files enabled for pre-conversion which have not yet been converted.
ProcGetVolumeGroups	Return volume group details
ProcGranuleEligibleForInsert	Based on input params shortname, version and metadata flag, determine what is eligible for insert
ProclnsertAccessRollup	Inserts the rollupdatetime for a specific access rollup period.
ProclnsertAIP	Insert new active process details into DIActiveInsertProcesses
ProclnsertBrowseFile	Insert browse file details into DIBrowseFile; Execute this procedure in chained mode
ProclnsertCollections	Insert a row to the DICollections table.
ProclnsertCollGrp	Insert a new collection group to DICollectionGroup table.
ProclnsertDIFile	Insert granule file details into DIFile; Execute this proc in chained mode
ProclnsertFtpGranuleAccess	Inserts data into DIGranuleAccess for access type FTP.
ProclnsertGeotiffFiles	Inserts GeoTiff files for a granule into DIFile.
ProclnsertGranuleBrowseXref	Insert xrefs into DIGranuleBrowseXref
ProclnsertGranuleSubscription	Insert into DIGranuleSubscription; Execute this proc in chained mode

**Table 3-110. Procedure Listing (11 of 27)**

Name	Description
ProclnsertOWSGranule	Inserts a new row into DIGranuleOWS if not already present.
ProclnsertWebGranuleAccess	Inserts data into DIGranuleAccess for access type http.
ProclnsBrowseFileInventoried	Check if this directory path/filename already exists in DIBrowseFile
ProclnsNonCacheLimitReached	Find if # of noncache processes in DIActiveInsertProcesses reached config limit
ProclnsOrderOnlyDirInfoPresent	Checks to see if order only dir info is present
ProclnsScienceFileInventoried	Check if this directory path/filename already exists in DIFile
ProcRemoveDeletedBrowse	Removes all browse granules whose browse files have been deleted successfully in a previous run from DIFilesToDelete.
ProcRemoveDeletedLinks	Removes all granules whose browse files have been deleted successfully in a previous run from DIFilesToDelete.
ProcRemoveDeletedSci	Removes all granules whose files have been deleted successfully in a previous run from DIFilesToDelete.
ProcRemoveGoodDeletes	Clears all rows which have state equal to zero.
ProcResetMarkers	Clears all markers from DIRecoveryParameters used in recovery.
ProcResolveTemporalKey	This procedure gathers the temporalKey for a specific period range.
ProcResolveTimeOfDayKey	This procedure gathers the timeOfDayKey for a specific period range.
ProcSaveHdfBandsFieldname	Inserts HDF Bands information, including fieldName
ProcSaveHdfFields	Inserts HDF Fields information
ProcSelectGrExpiration	Retrieves the SizeMB, ShortName, VersionId, expirationDate, retentionPriority for a specific granule.
ProcStoreFieldData	Insert field and band info into a temp table
ProcTruncateTempGrans	Truncate DITempGrans table.
ProcUpdateAIPdbid	Create an image of 'old' dbld details in DIActiveInsertProcesses for the specified 'new' dbld
ProcUpdateAIPStatus	Update 'status' and 'lastStatusChangeTime' columns of the specified process to reflect different transition states during insert process
ProcUpdateBadStates	Reset the state of all rows in DIFilesToDelete to 0.
ProcUpdateBrowseDlInsertTime	Update DlInsertTime for the specified browse. Execute this proc in chained mode
ProcUpdateBrowseState	Updates the state of the supplied browse file to 1.
ProcUpdateCollections	Updates the exclusionSCFlag and insertEnabledFlag for a specific collection.
ProcUpdateConfigParms	Updates all configuration parameters in DIConfig.

**Table 3-110. Procedure Listing (12 of 27)**

Name	Description
ProcUpdateGrExpiration	Updates the expirationDate and retentionPriority for a specific granule.
ProcDeleteTheme	Delete a specified theme from DIThemes
ProcGetAllThemes	Get a list of detailed theme information.
ProcGetGransToBeUpdated	Loads DIGrantsToBeUpdated temp table from the granules in DIUpdGranulesTemp table.
ProcGetGransToBeUpdatedByTheme	Load into a temporary table, DIGrantsToBeUpdated temp table, with a list of qualified granules associated with a given theme ID that satisfies the following condition: current expiration date is prior to a specified expiration date (or) current retention priority is less than a specified retention priority.
ProcGetInvalidInputGranules	Select all granules that are invalid for update.
ProcGetThemeByInsertEnabled	Get a list of theme information based on the value of the insertEnabledFlag.
ProcGetThemeld	Get themeld for a given theme name.
ProcGetUpdateGranulesSummary	Obtain summary information from the DIGrantsToBeUpdated temp table based on the status passed in.
ProcGetFilePath	Get xmlFileName based on the insQueueld that passed in.
ProcInsertTheme	Insert a theme into DIThemes.
ProcUpdateGranDlInsertTime	Update DlInsertTime for the specified granule. Execute this proc in chained mode
ProcUpdateGransExpPriority	Update the granules expiration dates and priorities in the DP inventory using information stored in the DIGrantsToBeUpdated temp table. The steps involved are as follows: Perform granule update in batches using a configured batch size obtained from DIProcAttributes table. Set the state of the granules that have been successfully updated to success (1) in DIGrantsToBeUpdated table as each batch gets updated. Return the total number and size of granules successfully updated.
ProcUpdateGranState	Update the state of the science granule to 1.
ProcUpdateLinkState	Update the state of the supplied link to 1.
ProcUpdateNonECS_collections	Update a specific Non-ECS collection.
ProcUpdateOWSGranState	Updates the processing state for a granule in table DIGranuleOWS.
ProcUpdateRefreshRate	Updates the parameter RefreshRate in DIConfig table.
ProcUpdateTheme	Updates theme information for a specified theme.
ProcUpdStateToIndexed	Updates the processing state of an OWS granule to indexed.

**Table 3-110. Procedure Listing (13 of 27)**

Name	Description
ProcDeleteAssocThemeXref	This procedure will remove all granule cross-references from the DIGranuleThemeXref table associated with the granules in the DIFilesToDelete table.
ProcDropGransToDelete	Deletes all existing granules in the DIGrantsToDelete temp table.
ProcFindDeleteOrphanedBrowse	Insert all orphaned browse into DIFilesToDelete and remove the obsolete browse from the inventory,
ProcGetAllBrowseFiles	This procedure returns a list of browse files in the DIBrowseFile table.
ProcGetAllCollections	Get a list of all collections in DP inventory.
ProcGetAssocGransToDelete	This procedure obtains a list of science granules (science and metadata files) that are associated with the phantom browse granules found in DITempPhantoms table and inserts them into DIFilesToDelete table.
ProcGetBatchSummary	Get a summary count of granules in the DIIinsertActionQueue base on the status of Pending, Completed and Failed for all batch label.
ProcGetBrPhantomsToDelete	This stored procedure puts the phantom browse granules found in DITempPhantoms table into DIFilesToDelete table.
ProcGetCollectionsByGroupId	This procedure returns the collectionId, ShortName, VersionId for a given collection groupId.
ProcGetFilesInDBByCollGroup	Get a list of science, metadata, browse links and associated browse files for a given collection group order by directoryPath and ilename.
ProcGetGransLimitByTheme	This procedure will insert into DIFilesToDelete all files for granules associated with a specific theme ID which have expired and have priority less than a given limit and not associated with any other theme.
ProcGetSciPhantomsToDelete	This stored procedure puts the phantom science granules found in DITempPhantoms table into DIFilesToDelete table.
ProcGetThemeByWebEnabled	Get a list of theme information based on the value of the webVisibleFlag.
ProcIsValidCollGroup	This procedure validates if a specified collection groupId exists in the Data Pool.
ProcRemoveThemeXref	This stored procedure removes all rows from the DIGranuleThemeXref table for a specific theme ID.
ProcTruncateFilesToDelete	This procedure truncates the DIFilesToDelete table.
ProcTruncateTempPhantoms	This procedure truncates the DITempPhantoms table.
ProcCartAddOrder	This procedure inserts a new order into the DICartOrder table if there is room.
ProcCartAddOrderItem	This procedure inserts a new order item into the DICartOrderItem table.

**Table 3-110. Procedure Listing (14 of 27)**

Name	Description
ProcCartAddOrderItemBand	This procedure inserts band information for an existing order.
ProcCartHEGGetBands	This procedure gets HEG band info for a specified itemld.
ProcCartHEGGetNewWork	This procedure allows the HEG Frontend to look for new work.
ProcCartMarkFailedItems	This procedure allows the Packager component of Webaccess cart to mark order items as failed if the link script failed for any reason.
ProcCartPkgGetNewWork	This procedure allows the Packager component of Webaccess cart to check for orders to complete.
ProcCartUpdateOrderItemStatus	This procedure updates the status field in the DICartOrderItem table.
ProcCartUpdateOrderStatus	This procedure updates the status and notes field in the DICartOrder table.
ProcCleanUpECSIds	This procedure deletes all rows in DIECSIdsToInsert containing this connection's spid (@pid).
ProcCleanUpXMLFiles	This procedure deletes all rows in DIXMLFilesToInsert containing this connection's spid (@pid).
ProcCountPhantomsDeleted	This procedure will count the phantoms from the DIFilesToDelete table.
ProcDeleteIneligibleGranuleIds	This procedure gets all ECS ids of granules from DIECSIdsToInsert that are ineligible for insert for the following reasons: Already queued in DIIInsertActionQueue Marked as DFA or logically deleted in SDSRV DB Not in SDSRV DB In collection not enabled for insert
ProcGetBandsForGranule	This procedure returns a table of band information for a specified granuleId.
ProcGetGranuleFiles	This procedure retrieves file metadata based on data type.
ProcGetNonSCMetadata	This procedure retrieves metadata based on data type.
ProcGetECSCollXMLFiles	This procedure gets all XML filenames for granules ineligible for insert because they are in an ECS collection.
ProcDeleteIneligibleXMLFiles	This procedure deletes all xml files from DIXMLFilesToInsert that are ineligible for insert for the following reasons: Associated with non-existent collection Already queued in DIIInsertActionQueue In collection not enabled for insert

**Table 3-110. Procedure Listing (15 of 27)**

Name	Description
ProcDpadDeleteProcess	This procedure deletes a DPAD process either by ECS ID or by XML file name.
ProcDpadDeleteProcessByEcsId	This procedure deletes a DPAD process by ECS ID.
ProcDpadDeleteProcessByXml	This procedure deletes a DPAD process by XML filename.
ProcGetBatchLabels	This procedure returns all unique batch label from DllInsertActionQueue.
ProcGetCollectionId	This procedure returns the collectionId from DICollections table.
ProcGetCollInsertEnabledFlag	This procedure returns the value of insertEnabledFlag from DICollections table.
ProcGetDbIdFromLocGranId	This procedure gets the dbId(s) for a local granule id.
ProcGetDeletedGranIds	This procedure gets all ECS ids of granules from DIECSIdsToInsert that are ineligible for insert because they are marked as DFA or logically deleted in SDSRV DB.
ProcGetEcsBrowseGranuleFiles	This procedure identifies files associated with a browse granule in SDSRV inventory.
ProcGetEcsBrowseInternalId	This procedure gets DPL internal browse id base on the ecsid.
ProcGetEcsGranuleId	This procedure retrieves the granuleId from the DIGranules table, based on the provided ecsid.
ProcGetEcsScienceInternalId	This procedure gets DPL internal granuleId based on the ecsid.
ProcGetEDGDatapoolInfo	This procedure retrieves all necessary URL information for a particular ecs granule id to allow the EDG to display DPL inventory information to a user.
ProcGetHEGToDelete	This procedure gets all cart orders that are qualified for deletion.
ProcGetNoCollGranIds	This procedure gets all ECS ids of granules from DIECSIdsToInsert that are ineligible for insert because their collections are not in DICollections.
ProcGetNoCollXMLFiles	This procedure gets all XML filenames for granules from DIXMLFilesToInsert that are ineligible for insert because their collections are not in DICollections.
ProcGetNoInsertGranIds	This procedure gets all ECS ids of granules from DIECSIdsToInsert that are ineligible for insert because they are in collections not enabled for insert.
ProcGetNoInsertXMLFiles	This procedure gets all XML filenames for granule from DIXMLFilesToInsert that are ineligible for insert because they are in a collection not enabled for insert.
ProcGetNonEcsBrowseFiles	This procedure gets files associated with a browse in DPL inventory.

**Table 3-110. Procedure Listing (16 of 27)**

Name	Description
ProcGetNonEcsBrowseInternalId	This procedure gets DPL internal browse id based on ecsid.
ProcGetNonEcsGranuleFiles	This procedure gets the filename and filetype for a non-ecs granule.
ProcGetNonEcsScienceInternalId	This procedure gets DPL internal granule id based on ecsid.
ProcGetNonExistGranIds	This procedure gets all ECS ids of granules from DIECSIdsToInsert that are ineligible for insert because they are not in SDSRV database.
ProcGetNonExistGrans	This procedure reads through the DITempGrans temporary table (built from the user input file) and reports any granules not found in the DlGranules table.
ProcGetOrderMgtConfig	This procedure gets order management operator config parameters
ProcGetPhantomBrowseDetails	This procedure gets a list of phantom browse files from DlFilesToDelete.
ProcGetPhantomDetails	This procedure gets a list of phantoms from DlFilesToDelete.
ProcGetQueuedGranIds	This procedure gets all ECS ids of granules from DIECSIdsToInsert that are ineligible for insert because they are already queued in DlInsertActionQueue.
ProcGetQueuedXMLFiles	This procedure gets all XML filenames for granule from DIXMLFilesToInsert that are ineligible for insert because they are already queued in DlInsertActionQueue.
ProcGetScienceFileGranuleId	
ProcGetScienceQAKey	This procedure returns the QA keys based on the specified parameter name and the QA flag.
ProcGetSCToBeDeleted	This procedure puts the granuleId into a temp table, which use for cleanup the DPL inventory.
ProcGetSDSRVData	This procedure loads all necessary granule data from SDSRV database DsMdGranules table into temp table for subsequent processing.
ProcGetTempThemeSummary	This procedure gets count of granules grouped for each theme category given a vector of granuleIds.
ProcGetThemeByBeginningLetter	This procedure returns the theme information based on the beginning letter of a theme.
ProcGetThemeByFilters	This procedure returns the theme information based on the filters that pass in.
ProcGetThemeData	This procedure gets the themId and insertEnabledFlag for a theme name.
ProcGetThemeKey	This procedure returns all theme key.
ProcGetThemeKeyMap	This procedure returns the value key map for theme search.
ProcGetThemeSummary	This procedure returns granule count for each theme.
ProcGetUniqueId	This procedure returns a unique DPL internal id based on the object type.

**Table 3-110. Procedure Listing (17 of 27)**

Name	Description
ProcGetUniqueIDOutput	This procedure returns a unique DPL internal id as part of the output parameter based on the object type.
ProcGetXMLFilePath	
ProcInsertBrowse	This procedure inserts a row into DIBrowse table.
ProcInsertECSActions	This procedure inserts actions for granules in DIECSIdsToInsert into DIInsertActionQueue table.
ProcInsertGranules	This procedure inserts a granule into DIGranules table.
ProcInsertGranuleTemp	This procedure inserts into myGranulesTable for web access.
ProcInsertGrExpirationPriority	This procedure inserts a row into DIGranuleExpirationPriority table.
ProcInsertMeasuredParameter	This procedure inserts a row into the DIMeasuredParameter table.
ProcInsertNonECSActions	This procedure inserts actions for granules in DIXMLFilesToInsert into DIInsertActionQueue table.
ProcInsertNonECSCollections	This procedure inserts a non-ecs collection into DPL.
ProcInsertNonEcsGranule	This procedure inserts a row into DIGranules for non-ecs granule.
ProcInsertOrbitCalSpatial	This procedure inserts a row into DIOrbitCalculatedSpatial table.
ProcInsertXMLInfo	This procedure inserts info for a non-ECS XML file into the DIXMLFilesToInsert table.
ProcIsCollectionEcs	This procedure gets ecsFlag value for a specified ESDT.
ProcIsEcsBrowseInDataPool	This procedure checks whether the specified browse is present in DPL inventory.
ProcIsEcsGranuleProcessing	This procedure checks whether the specified granule is present in DPL inventory.
ProcIsEcsSCGranuleInDataPool	This procedure checks whether a record with the specified dbld exists in DIActiveInsertProcesses.
ProcIsGranuleThemeXref	This procedure determines whether a granule theme cross-reference exists in DIGranuleThemeXref.
ProcIsNonEcsBrowseInDataPool	This procedure determines whether a non-ecs browse exists in DPL.
ProcIsNonEcsBrowseReady	This procedure checks whether the browse exists for the granule.
ProcIsNonEcsGranuleInDataPool	This procedure determines whether a non-ecs granule exists in DPL.
ProcIsNonEcsGranuleInserted	This procedure checks whether the granule exists in DIGranules.
ProcDelQaUpdates	This procedure deletes rows in QA working tables that have xmlUpdateFlag = 'Y'
ProcGetDayNightFlagKey	This procedure returns the keys for day night search.

**Table 3-110. Procedure Listing (18 of 27)**

Name	Description
ProcGetQa	This procedure gets QA update data from working tables for ecsId
ProcGetXmlFileName	This procedure gets the xml filename from DIFile for an ecsId
ProcIsNonEcsGranuleProcessing	This procedure checks whether a record with the specified non-ecs granule exists in DIActiveInsertProcesses.
ProcIsNonEcsGranuleReady	This procedure checks whether a bunch of external granuleids already in DPL when a browse arrives alone.
ProcIsSciGranGlobal	Retrieves the info to if the specified science granule is a global granule or not. The client code will implement the rules for global granules determination.
ProcIsThemeEnabled	This procedure checks whether insert enabled for a specified theme.
ProcMakeThemeRetroactive	This procedure associates all granules in the data pool which were previously inserted because of a subscription with theme that is now associated with that subscription.
ProcNumOfObjects	This procedure returns the tables, procedures, triggers and view count for the database.
ProcOSGetDplDeletedURL	This procedure retrieves the deleted granuleId(s) from DPL.
ProcOSGetDplURL	This procedure retrieves ftp URLs.
ProcPopulateDIQAUdpFlagTemp	This procedure will populate the DIQAUdpFlagTemp.
ProcRemoveThemeXrefForThemes	This procedure removes all rows from DIGranuleThemeXref table for a specific theme ID as long as there is an associated entry in the DIFilesToDelete table.
ProcSetXmlUpdFlag	This procedure updates xmlUpdateFlag to 'Y'.
ProcThemeEnabledForInsert	This procedure checks whether the theme is enabled for DPL insert.
ProcUpdateDirectoryPath	
ProcUpdateHEGOOrder	This procedure updates the archiveFlag for a specified ordered.
ProcUpdateIsOrderOnlyFlag	This procedure updates the value of the isOrderOnly column in DIGranules.
ProcUpdateOrderMgtConfig	This procedure updates order management operator config parameters
ProcUpdatePeriodPriority	This procedure updates the retentionPriority and expiration date based on the provided granuleId.
ProcUpdateQa	This procedure updates the DIMeasuredParameter table for the ecsId with new science & operational QA value and explanation.
ProcUpdNonEcsGranInsertTime	This procedure updates the insert time for non-ecs granules.
ProcCheckActiveInsertProcesses	This procedure retrieves the value of insertEnabledFlag for an ESDT.

**Table 3-110. Procedure Listing (19 of 27)**

Name	Description
ProcDeleteCloudCover	This procedure deletes from the DIGrCloudCover table for all granules in DIFilesToDelete.
ProcDeleteGranule	Remove the granule and specified cross-references.
ProcDeleteGranuleTiles	This procedure deletes from DiGranuleTiles table for all granules in DIFilesToDelete.
ProcDeleteGranuleHdfObjectXref	Deletes HDF-object xref info for a granule
ProcDeleteGRHdfObjectsXref	This procedure deletes from DiGranuleHdfObjectsXref table for all granules in DIFilesToDelete.
ProcDeleteLinkedGran	Remove the linked granule for a specified granule.
ProcDeleteOMSGranule	This procedure deletes from DIOMSGranules table for all granules in DIFilesToDelete.
ProcDeleteOrderGranuleN	Remove granule information for a specified granule.
ProcDeleteSingleGranuleN	Remove granule information for a specified granule.
ProcGetBrowseMetadata	Creates an XML string containing minimal SDSRV information for a browse granule.
ProcGetCollsInDelFiles	This procedure searches through DIFilesToDelete and get the distinct collection/VersionIds.
ProcGetDeletedECSGrans	This stored procedure will collect the rows from the science database which have been marked for deletion.
ProcGetFSInfoByESDT	This procedure returns the file system info for an ESDT.
ProcGetInsertEnabledFlag	This procedure retrieves the value of insertEnabledFlag for an ESDT.
ProcGetOfflineCollections	This procedure searches through the DITempGrans table and identify which collections are on file systems that are marked unavailable. ShortName and VersionId for collections with cleanup candidates are passed back.
ProcGetQaGranIds	This procedure gets granuleId and xmlUpdateFlag to load into memory.
ProcGetRecoveryParams	This procedure returns command-line and configuration parameters from an interrupted run.
ProcInsertRecoveryParams	This procedure inserts a new row into DIRecoveryParameters for the cleanup utility.
ProcRemapCollToGrp	This procedure updates all the tables to change the group mapping info with the new group.
ProcUpdateCollToGrpMapping	This procedure updates the groupId for an ESDT.
ProcUpdateRecoveryParams	This procedure updates or inserts a row in DIRecoveryParameters for the utility based upon whether or not it already exists.

**Table 3-110. Procedure Listing (20 of 27)**

Name	Description
ProcDeleteIAQ	This procedure deletes a row from DlInsertActionQueue for a specified actionQueueId.
ProcDeleteOMSGranules	This procedure deletes a row in DIOMSGranules for a specified granuleId.
ProcGetCloudCoverSummary	This procedure retrieves cloud cover information for all collections.
ProcGetCollectionDir	This procedure would list collection level directories
ProcGetFileInfo	This procedure retrieves file information for a specified granuleId.
ProcGetFilesInDir	This procedure will return a list of files inserted in specified period for a given directory
ProcGetFSGrpESDTMappings	This procedure returns the file system, collection group, ESDT mapping
ProcGetQualitySummary	This procedure retrieves quality summary for a collection.
ProcGetTopDirEntry	This procedure will list unique short name & version Id of files inserted on specified date.
ProcInsertOMSAction	This procedure inserts a row in DlInsertActionQueue for an OMS action.
ProcInsertOMSGranule	This procedure inserts a row in DIOMSGranules for a specified granuleId.
ProcInsNonECSOMGranule	This procedure inserts a row in DIOMSGranules for a specified granuleId.
ProcInsNonECSOMGranule	This procedure inserts a row in DIOMSGranules for a specified granuleId.
ProcIsCollEmpty	This procedure checks whether the collection has any granules.
ProcIsCollGrpValid	This procedure checks whether the group is valid.
ProcIsCollMapToCollGrp	This procedure checks whether the specified collection maps to the specified collection group.
ProcIsCollValid	This procedure checks whether the specified collection is valid.
ProcIsEcsSCGranuleInDP	This procedure checks whether this specified granule is present in DataPool inventory.
ProcIsNonECSGranuleInDP	This procedure checks whether this specified NON-ECS granule is present in DataPool inventory.
ProcPopulateOMSTmpGranfiles	This procedure populates the OMS #GRANfile for stored procedure OmlnsBulkGranules in OMS database.
ProcPopulateOMSTmpGranules	This procedure populates granule information for OMS table #Granules in stored procedure OmlnsBulkGranules in OMS database.
ProcCanRemoveBrowse	This procedure removes browse association for a specified granule.
ProcDeleteAssociatedBrowse	This procedure removes the browse granule for a specified granule.

**Table 3-110. Procedure Listing (21 of 27)**

Name	Description
ProcGetCloudCoverSourceInfo	This procedure retrieves cloud cover information for a specified ESDT.
ProcGetCollInfo	This procedure retrieves collection level information for a specified ESDT.
ProcGetESDTsAvailability	This procedure checks the availability for the list of granules.
ProcGetESDTSkipFlags	This procedure returns the skip flags for a specified ESDT.
ProcGetOrbitIntersects	This procedure gets a list of spatialKey based on a search of DIDimensionPolygonXref.
ProcGetOVDplBrowseFiles	This procedure returns the directoryPath, filename for the files associated for a specified granule.
ProcGetSpatialSummary	This procedure returns the density map for a specified ESDT.
ProcGetTempCloudCoverSummary	This procedure retrieves cloud cover information for an ESDT.
ProcGetTempSpatialSummary	This procedure returns the density map for a specified ESDT.
ProcInsertGranuleHdfObjectXref	This procedure inserts HDF information for a specified granule.
ProcInsertGranuleTiles	This procedure inserts spatial information for a granule.
ProcInsertGrCloudCover	This procedure inserts cloud cover information for a granule.
ProcIsMFSOnInsert	This procedure checks whether DPAD should use the Multiple File System procs.
ProcIsSysLevCompOn	This procedure retrieves the parameter value of CompressOnInsert from DIConfig.
ProcSaveHdf4thDimensions	This procedure inserts the HDF 4th dimension information into DIHdf4thDimensions table.
ProcSaveHdfBands	This procedure inserts the HDF band information into DIHdfBands.
ProcSaveHdfObjects	This procedure inserts HDF objects information.
ProcUpdateCollectionGridLevel	This procedure returns the gridLevel for a specified ESDT.
ProcUpdateDIStatESDT	This procedure updates the DIStatESDT table.
ProcUpdateDIStatGroupESDT	This procedure updates the DIStatGroupESDT table.
ProcUpdateDIStatTheme	This procedure updates the DIStatTheme table.
ProcUpdateFSFreeSpace	This procedure updates the freeSpaceFlag for a specified file system.
ProcGetDplCamerald	This procedure retrieves the misrCamerald from DIOrbitCalculatedSpatial.

**Table 3-110. Procedure Listing (22 of 27)**

Name	Description
ProcGetFileSystemPath	This procedure returns the absolute file system path and groupId for a specified collection.
ProcGetMisrBrowseEsdts	This procedure returns a list of configured MISR Browse ESDTs.
ProcGetMisrL1Esdts	This procedure returns a list of configured MISR L1 ESDTs.
ProcGetMisrL2Esdts	This procedure returns a list of configured MISR L2 ESDTs.
ProcGetOVDplGranuleFiles	This procedure returns directoryPath and filename for a specified granule.
ProcInsertGranuleBrowseXref	This procedure inserts MISR and MISR Browse granule association.
ProcInsertMisrBrowse	This procedure inserts the MISR browse metadata into DIBrowse.
ProcIsDoubleInsertNeeded	This procedure verifies whether a double insert is needed for a specified collection.
ProcIsGrReplacementNeeded	This procedure checks whether granule replacement is needed.
ProcIsLevel1ProcessingOn	This procedure verifies whether MISR L1 ESDT processing is on.
ProcIsLevel2ProcessingOn	This procedure verifies whether MISR L2 ESDT processing is on.
ProcIsMisrProcessingOn	This procedure verifies whether MISR processing is on.
ProcRemoveActiveInsertProcess	This procedure removes a row from DIActiveInsertProcesses for a specified ecslId.
ProcDeactivateCompAlgorithm	This procedure deactivates a compression algorithm.
ProcDeleteBackfilledOMSInfo	This procedure removes all OMS information from the tables that are backfilled because it is an order only granule.
ProcDeleteCloudCoverSource	This procedure deletes a specified cloud cover source.
ProcDeleteSingleBrowse	This procedure deletes a browse.
ProcGetAllCloudSource	This procedure retrieves a list of cloud cover source information.
ProcGetAssociatedCollections	This procedure returns all collections for compression algorithms.

**Table 3-110. Procedure Listing (23 of 27)**

Name	Description
ProcGetChecksumByFile	This procedure returns the checksumType and checksumValue for a specified file from the SDSRV database.
ProcGetCloudSourceld	This procedure returns the cloudSourceld for a specified sourceName, sourceType.
ProcGetCompAlgorithms	This procedure returns all compression algorithms.
ProcGetDplGranuleXmlFile	This procedure returns the directoryPath and the xml filename for a specified granule.
ProcGetESDTSummaries	This procedure returns the total granule count and granule size for a specified ESDT.
ProcGetFileSystemLabels	This procedure returns a list of file system labels.
ProcGetFileSystemsInfo	This procedure returns all file systems information.
ProcGetInsertQueueByFilters	This procedure returns the insert queue information based on the filters.
ProcInsertCloudCoverSource	This procedure inserts a row into DICloudCoverSource.
ProcInsertCompAlgorithm	This procedure inserts compression algorithms.
ProcInsertFileSystem	This procedure inserts a row for a file system.
ProcIsCollHasCloudCoverGrans	This procedure checks whether there are any granules that have cloud cover information for a specified ESDT.
ProcIsOMSGranule	This procedure verifies whether the specified granule is an order only granule.
ProcSetDisplayAIPChunkSize	This procedure updates the parameter value for DisplayAIPChunkSize parameter in DIConfig.
ProcSwitchToTapeProcess	This procedure updates the inCacheFlag when a granule is not in cache.
ProcUnflagOMSGranule	This procedure resets the isOrderOnly flag to null.
ProcUpdateCloudCoverSource	This procedure updates the specified cloud cover source.
ProcUpdateCompAlgorithm	This procedure updates the specified compression algorithms.
ProcUpdateFileSystem	This procedure updates a file system.
ProcClearMoveFlag	This procedure resets the move flag in DICollections table.
ProcCopySdsrvDapInventory	This procedure copies the DAP granule information from SDSRV.
ProcCopySdsrvInventory	This procedure calls another copy inventory proc base on the granule type.
ProcCopySdsrvPhInventory	This procedure copies the PH granule information from SDSRV.
ProcCopySdsrvQaInventory	This procedure copies the QA granule information from SDSRV.

**Table 3-110. Procedure Listing (24 of 27)**

Name	Description
ProcCountPhantoms	This procedure returns the number of phantom browse files found.
ProcDeleteCollection	Deletes a single collection from the DPL DB.
ProcDeleteOrderGranule	This procedure removes Datapool inventory for order-only granule.
ProcDelRecoveryParams	This procedure deletes rows from DIRecoveryParameters bases on the parameter.
ProcGetAcquisitionDate	This procedure retrieves the acquisition date.
ProcGetAgingConfigInfo	This procedure retrieves the aging configuration information from DIAgingConfig.
ProcGetAIPByStatusTime	This procedure retrieves all rows from the DIActiveInsertProcesses table by descending status time
ProcGetAIPStatusFilters	This procedure retrieves NumOfAllowedInsertProcesses, NumOfAllowedCacheProcesses, NumOfAllowedNonCacheProcesses, RefreshRate from the DIConfig table.
ProcGetApGranuleFiles	This procedure retrieves the datat files for an AP granule.
ProcGetApMetadata	This procedure retrieves metadata information for an AP granule and uses for generate the XML file.
ProcGetBandsForGranule	This procedure retrieves the band information for a granule.
ProcGetBrowseFileBrowseld	This procedure retrieves the browse id for a browse file.
ProcGetCartOrderItemInfo	This procedure retrieves the cart order item information.
ProcGetCollPath	This procedure retrieves the collection path.
ProcGetDapGranuleFiles	This procedure retrieved the data files for a DAP granule.
ProcGetDapMetadata	This procedure retrieves the metadata information for an DAP granule and uses for generate the XML file.
ProcGetFileVolumeGroup	Retrieve stmgmt Volume related info based on specified granule or browse id's insert time.
ProcGetGroupESDTKey	This procedure retrieves the group ESDT key.
ProcGetHiddenGranIds	This procedure retrieves all ecs ids in DIECSIdsToInserts that are ineligible due to DFA or logically deleted in SDSRV DB.
ProcGetNonSCAcquisitionDate	This procedure retrieves the acquisition date for a non-science granule.
ProcGetOrderedFiles	This procedure retrieves the ordered files.
ProcGetOrderOnlyCollPath	This procedure retrieves the absoluteFileSystemPath and groupId for a specified ESDT.
ProcGetOrderOnlyFilePath	This procedure returns the full directoryPath for an given granule.
ProcGetOrderOnlyFSInfoByESDT	This stored procedure will return the file system info for a specified ESDT.

**Table 3-110. Procedure Listing (25 of 27)**

Name	Description
ProcGetPhGranuleFiles	This procedure retrieves the data files for a PH granule.
ProcGetPhMetadata	This procedure retrieves the metadata information for PH granule and uses for generate the XML file.
ProcGetQaGranuleFiles	This procedure retrieves the data files for QA granule.
ProcGetQaMetadata	This procedure retrieves the metadata information for QA granule and uses for generate the XML file.
ProcGetQualitySummary	This procedure retrieves the quality summary info from DICollections table for an ESDT.
ProcGetSpatialSummary	This procedure returns the density map for a specified ESDT.
ProcGetSsapGranuleFiles	This procedure retrieves the data files for SSAP granule.
ProcGetSsapMetadata	This procedure retrieves the metadata information for SSAP granule and uses for generate the XML file.
ProcGetStatusCount	This procedure retrieves the count base on status.
ProcGetTimeOfDaySummary	This procedure retrieves the time of day summaries for a collection.
ProcInsDeletedGranByLimit	This procedure inserts the granules in the temp table base on the priority limit and expiration date.
ProcInsDeletedGranByTheme	This procedure inserts the granules in the temp table base on a theme.
ProcInsertThemeXref	This procedure inserts rows in DIGranuleThemeXref table.
ProcIsDoubleInsertNeeded	Verified whether a double insert is needed for a specified collection.
ProcSetMoveFlag	This procedure sets the move flag in DICollections table.
ProcUpdateFSInClearAlert	Wrapper stored proc used by InClearAlert
ProcUpdateFSInColdRCleanup	Wrapper stored proc used by InColdRestartCleanup
ProcUpdateFSInCreateAlert	Wrapper stored proc used by InCreateAlert
ProcUpdateFSInInfo	Wrapper stored proc used by InUpdateFSInfo
ProcUpdateFSSuspResume	Wrapper stored proc used by InSuspResumeFS
ProcUpdateQueueStatus	This procedure updates the status in DlInsertActionQueue.
ProcUpdateActiveProcess	This procedure updates the active process in DIActiveInsertProcesses table.
ProcUpdateAgingInfo	This procedure updates the aging configuration.
ProcUpdCollFileSys	This procedure updates the file system label for a collection.
ProcUpdOrderOnlyCollFileSys	This procedure updates the order only file System path mapping for a specified ESDT
ProcUpdOrderOnlyGrpDirName	This proc creates order only hidden collection group entries in the DPL database.
ProcUpdOrderOnlySNDirName	This proc updates the orderOnlySNDirName column in DICollections for a given ESDT. If there are granules associated with the ESDT, then update the shortname portion of the directoryPath for the granules in DIFile

**Table 3-110. Procedure Listing (26 of 27)**

Name	Description
ProcGetInsertQueueAll	Get queue information for all requests that have batchLabel; based upon the status of the requests.
ProcGetDplBrowseFiles	Returns the directorypath and filename for the files associated with the specified browse granule.
ProcGetDplGranuleFiles	Returns the directorypath and filename for the files associated with the specified granule.
ProcUpdateCollGrp	Update collection group.
ProcBmgtCleanEventByDays	Cleanup events in DIBmgtEvents table for completed cycle
ProcBmgtDelEventById	Deletes an event by cycleId
ProcBmgtGetCLMovedURLs	Return metadata for granules from moved collections
ProcBmgtGetDelURLsByList	Returns the metadata for deletion of granules specified by the user and not currently in datapool
ProcBmgtGetDelURLsManImplicit	???
ProcBmgtGetDeleteURLs	Returns the a list of all deleted granules whose deletion has not been exported
ProcBmgtGetInsURLsByList	Returns the URL metadata for all granules in DsMdBmgtWrkGranules table for a manual insert run
ProcBmgtGetInsURLsManImplicit	used by manual insert cycle to look for BulkURLs successfully generated in DsMdBmgtMETG table
ProcBmgtGetInsertURLs	Returns a result set containing the URL metadata for all granules inserted into the public datapool prior to the specified end time and which have not been previously exported
ProcBmgtGetMETGExportURLs	Get the urls for granules whose core metadata is being exported in a METG product and do not have events in DIBmgtEvents table for a given cycle
ProcBmgtInsCleanupEvents	add events for all of the new granules marked for deletion and mark all events that will be exported in the subsequent cleanup cycle
ProcBmgtReGenCycleId	re-generate cycleId for a given cycleId in DIBmgtEvents
ProcBmgtResetCycleId	reset cycleId in DIBmgtEvents table
ProcBmgtUpdEventCycleId	reset cycleId in DIBmgtEvents table
ProcBmgtUpdExportStatus	mark all exported events as exported
ProcGetFileSystemRefresh	Returns refresh rate for DPL File Systems page
ProcUpdateFileSystemRefresh	Updates refresh rate for DPL File Systems
ProcUpdFileSystemLabel	Update DCollections with file system label information
ProcGetBrowseLinkPath	Retrieves the pathname of the browse link
ProcDIAdGetXmLFile	Get path to xml file from the inventory database
ProcGetGranInfoByEcsId	Checks to see if granule is in the Data Pool, returning DPL granuleId and absolute dir path. Assumes that the granule is hidden.
ProcLockGranules	Lock granules for cleanup

**Table 3-110. Procedure Listing (27 of 27)**

Name	Description
ProcSetAIPStatusFilters	This procedure sets status filter flags for DIActiveInsertProcesses table
ProcLockBrowse	Lock browse granules for cleanup
Sp_thresholdaction	Action to take when crossing the threshold.
Datawarning	Print warning message when data segment threshold is crossed.
Logdump	Print message and dump the transaction log when log segment threshold is crossed.
Logwarning	Print warning message when log segment threshold is crossed.

### **3.2 File Usage**

There are cases when the implementation of a persistent data requirement is better suited to a flat file than to a database table. A typical example of such data is system configuration information. System configuration information is fairly static and usually has no explicit relationship to other data in the enterprise. Another common use of files in ECS is as an interface mechanism between ECS and the external world. Files utilized in Data Pool are described herein.

This page intentionally left blank.

## 4. Performance and Tuning Factors

---

### 4.1 Indexes

An index provides a means of locating a row in a database table based on the value of a specific column(s), without having to scan all data in the table. When properly implemented, indexes can significantly decrease the time it takes to retrieve data, thereby increasing performance. Sybase allows the definition of two types of indexes, clustered and non-clustered.

In a clustered index, the rows in a database table are physically stored in sequence-determined by the index. Clustered indexes are particularly useful, when the data is frequently retrieved in sequential order. Only one clustered index may be defined per table.

Non-clustered indexes differ from their clustered counterpart, in that, data is not physically stored in sorted order—newly added rows are stored at the end of the related database table.

A key of the types of indexes found in Data Pool is provided in Table 4-1 Index Type Key. A list and description of each of the defined indexes is given in Table 4-2 Index List.

**Table 4-1. Index Type Key**

Index Type Key	Description
PK	Primary Key
FK	Foreign Key
U	Unique – Only one for the column code combination
C	Clustered or non-clustered index
Sort	ASC (ascending) or DESC (descending) order

**Table 4-2. Index List (1 of 4)**

Table Code	Index Code	PK	FK	U	C
EcDbDatabaseVersions	EcDbDatabaseVersionsPkConstr	Yes	No	Yes	Yes
DIAccessRollup	DIAccessRollUpPkConstr	Yes	No	Yes	Yes
DIActiveInsertProcesses	DIActiveInsertProcessEcsldIdx	Yes	No	Yes	Yes
DIActiveInsertProcesses	DIAIPPkConstr	Yes	No	Yes	Yes
DIAdAlert	PK_DLADALERT	Yes	No	Yes	Yes
DIAdMessages	PK_DLADMESSAGES	Yes	No	Yes	Yes
DIAgingConfig	DIAgingConfigPkConstr	Yes	No	Yes	Yes
DIBmgtEvents	pk_event	Yes	No	Yes	Yes
DIBmgtEvents	idx_bmgteventgranideventtype	No	No	No	No
DIBmgtEvents	idx_bmgteventcycleid	No	No	No	No
DIBmgtEvents	idx_bmgteventcollectionid	No	No	No	No

**Table 4-2. Index List (2 of 4)**

Table Code	Index Code	PK	FK	U	C
DIBmgtEvents	idx_eventecsidgranid	No	No	No	No
DIBoundingRectangle	xDIBoundingRectangle	No	No	No	Yes
DIBoundingRectangle	DIBoundingRectanglePkConstr	Yes	Yes	Yes	No
DIBrowse	DIBrowsePkConstr	Yes	No	Yes	Yes
DIBrowse	DIBrowseEcslldIdx	No	No	No	No
DIBrowse	DIBrowseExternalldIdx	No	No	No	No
DIBrowseFile	DIBrowseFileBrowseldIdx	No	No	No	No
DIBrowseFile	DIBrowseFilePkConstr	Yes	Yes	Yes	Yes
DIBrowseFile	DIBrowseFileUniqueFileIdx	No	No	Yes	No
DICartOrder	DICartOrderPkConstr	Yes	No	Yes	Yes
DICartOrderItem	DICartOrderItemPkConstr	Yes	No	Yes	Yes
DICartOrderItemBand	DICartOrderItemBandItemldIdx	No	No	No	No
DICloudCoverSource	DICloudCoverSourcePkConstr	Yes	No	Yes	Yes
DICollectionGroup	DICollectionGroupPkConstr	Yes	No	Yes	Yes
DICollections	DICollectionPkConstr	Yes	No	Yes	Yes
DICollections	DICollShortNameVldIdx	No	No	No	No
DICompressionAlgorithms	DICompAlgorithmsPkContr	Yes	No	Yes	Yes
DIConfig	DIActionConfigPkConstr	Yes	No	Yes	Yes
DIDimensionDayNight	DIDimensionDayNightPkConstr	Yes	No	Yes	Yes
DIDimensionGroupESDT	DIDimensionGroupESDTPkConstr	Yes	No	Yes	Yes
DIDimensionGroupESDT	DIDimensionGrpESDTgrpValuedx	No	No	No	No
DIDimensionMP	DIDimensionMPPkConstr	Yes	No	Yes	Yes
DIDimensionMP	DIDimensionMPqaKeyqaValIdx	No	No	No	No
DIDimensionMP	DIDimensionMPqaValIdx	No	No	No	No
DIDimensionMPScienceQA	DIDimMPScienceQAXrefPkConstr	Yes	No	Yes	Yes
Xref					
DIDimensionMPScienceQA	DIDimMPSCQAXrefqaNameKeyIdx	No	No	No	No
Xref					
DIDimensionPolygonXref	DIDimensionPolygonXrefPkConstr	No	No	Yes	No
DIDimensionScienceQA	DIDimensionScienceQAPkConstr	Yes	No	Yes	Yes
DIDimensionSpatialT6All	DIDimensionSpatialIdx	No	No	No	Yes
DIDimensionSpatialT6All	DIDimensionSpatialT6PkConstr	Yes	No	Yes	No
DIDimensionTemporal	DIDimensionTemporalPkConstr	Yes	No	Yes	Yes
DIDimensionTemporal	DIDimensionTemporalTypeIdx	No	No	No	No
DIDimensionTimeOfDay	DIDimensionTimeOfDayPKConstr	Yes	No	Yes	Yes
DIECSIdsToInsert	DIECSIdsToInsertPkConstr	Yes	No	Yes	Yes
DIESDTCurrentDensityMap	DIESDTCurrDensityMapPkConstr	Yes	No	Yes	Yes
DIFactDayNight	DIFactDayNightPkConstr	Yes	No	Yes	Yes
DIFactDayNight	DIFactDayNightIdx	No	No	No	No
DIFactGroupESDT	DIFactGroupESDTPkConstr	Yes	No	Yes	Yes
DIFactGroupESDT	DIFactGroupESDTIdx	No	No	No	No

**Table 4-2. Index List (3 of 4)**

Table Code	Index Code	PK	FK	U	C
DIFactQA	DIFactQAPKConstr	Yes	No	Yes	Yes
DIFactQA	DIFactQAIIdx	No	No	No	No
DIFactTemporalRange	DIFactTemporalRangePkConstr	Yes	Yes	Yes	Yes
DIFactTemporalRange	DIFactTemporalRangeCollMXDK	No	No	No	No
DIFactTemporalRange	DIFactTemporalRangeCollMXWK	No	No	No	No
DIFactTemporalRange	DIFactTemporalRangeCollMXMK	No	No	No	No
DIFactTimeOfDay	DIFactTimeOfDayPkConstr	Yes	No	Yes	No
DIFactTimeOfDay	DIFactTimeOfDayIdx	No	No	No	No
DIFile	DIFileDirectoryPathIdx	No	No	No	No
DIFile	DIFilePkConstr	Yes	No	Yes	Yes
DIFile	DIFileGranuleIdx	No	Yes	No	No
DIFileSystems	DIFileSystemsPkContr	Yes	No	Yes	Yes
DIFileSystems	DIFileSystemsFileSystemIDIdx	No	No	No	No
DIFilesToDelete	DIFilesToDeleteBrowselIdx	No	No	No	No
DIFilesToDelete	DIFilesToDeleteGranuleIdx	No	No	No	No
DIFtpAccessLog	DIFtpAccessLogIdx	No	No	No	Yes
DIGPolygon	xDIGPolygon	No	No	No	Yes
DIGPolygon	DIGPolygonPkConstr	Yes	Yes	Yes	No
DIGCloudCover	DICoudCoverPkConstr	Yes	Yes	Yes	Yes
DIGranuleAccess	DIGranuleAccessdbldIdx	No	No	No	No
DIGranuleAccess	DIGranuleAccessAccTimelIdx	No	No	No	No
DIGranuleBrowseXref	DIGranuleBrowseXrefBrowselIdx	No	No	No	No
DIGranuleBrowseXref	DIGranuleBrowseXrefPkConstr	Yes	Yes	Yes	Yes
DIGranuleExpirationPriority	DIGranExpirPriorityPkConstr	Yes	Yes	Yes	Yes
DIGranuleHdfObjectsXref	DIGranHdfObjXrefGIdObjldIdx	No	Yes	No	No
DIGranuleSubscription	DIGranuleSubPkConstr	Yes	No	Yes	Yes
DIGranuleThemeXref	DIGranuleThemeXrefPkConstr	Yes	Yes	Yes	Yes
DIGranuleTiles	DIGranuleTilesCollInsTimelIdx	No	No	No	Yes
DIGranuleTiles	DIGranuleTilesPkConstr	Yes	Yes	Yes	No
DIGranules	DIGranulePkConstr	Yes	No	Yes	Yes
DIGranules	DIGranulesEcsldIdx	No	No	No	No
DIGranules	DIGranulesExternalldIdx	No	No	No	No
DIGranules	DIGranulesCollldIdx	No	Yes	No	No
DIGranules	DIGranulesEcsInsTimelIdx	No	No	No	No
DIGranuleOWS	DIGranuleOWSPkConstr	Yes	No	Yes	Yes
DIGranuleOWS	DIGranuleOWSSStateUpdIdx	No	No	No	No
DIHEGExceptionCollXref	DIHEGExceptionCollXrefPkConstr	Yes	No	Yes	Yes
DIHEGExceptions	DIHEGExceptionsPkConstr	Yes	Yes	Yes	Yes
DIHEGLookup	DIHEGLookupPkConstr	Yes	No	Yes	Yes
DIHEGOptionCollXref	DIHEGOptionCollXrefPkConstr	Yes	No	Yes	Yes

**Table 4-2. Index List (4 of 4)**

Table Code	Index Code	PK	FK	U	C
DIHEGOptionLabel	DIHEGOptionLabelPkConstr	Yes	No	Yes	Yes
DIHEGOPTIONS	DIHEGOPTIONSPkConstr	Yes	Yes	Yes	Yes
DIHdf4thDimensions	DIHdf4thDimensionsPkConstr	Yes	No	Yes	Yes
DIHdfBands	DIHdfBandsPkConstr	Yes	No	Yes	Yes
DIHdfFields	DIHdfFieldsPkConstr	Yes	No	Yes	Yes
DIHdfObjects	DIHdfObjectsPkConstr	Yes	No	Yes	Yes
DIIIdentifier	DIIIdentifierPkConstr	Yes	No	Yes	Yes
DIIInsertActionQueue	DIIAQecsIdIdx	No	No	No	No
DIIInsertActionQueue	DIIAQxmlFileNameIdx	No	No	No	No
DIIInsertActionQueue	DIIInsertActionQueuePkConstr	Yes	No	Yes	Yes
DIIInsertActionQueue	DIIAQprocessStatIdx	No	No	No	No
DIMeasuredParameter	DIMeasuredParameterPkConstr	Yes	Yes	Yes	Yes
DINOSELookup	DINOSELookupPkConstr	Yes	No	Yes	Yes
DIOMSGranules	DIOMSGranulesPkConstr	Yes	No	Yes	Yes
DIOMSGranules	DIOMSGranGranIdIdx	No	No	No	No
DIOMSGranules	DIOMSGranLockIdIdx	No	No	No	No
DIOrbitCalculatedSpatial	DIOrbitCalSpatialPkConstr	Yes	No	Yes	Yes
DIOrbitPolygons	xDIOrbitPolygons	No	No	No	Yes
DIOrbitPolygons	DIOrbitPolygonsPkConstr	Yes	No	Yes	No
DIOWSDeletedGranules	DIOWSDeletedGranulesPkConstr	Yes	No	Yes	Yes
DIOWSDeletedGranules	DIOWSDeletedGranulesExpDateIdx	No	No	No	No
DIPlatInstrCode	DIPlatInstrCodePkConstr	Yes	No	Yes	Yes
DIProcAttributes	PK_PROCATTRIBUTES	Yes	No	Yes	Yes
DIPrivateCollection	DIPrivateCollectionPkConstr	Yes	No	Yes	Yes
DIQAUdpFlagTemp	DIQAUdpFlagTempGranParmIdx	No	No	No	No
DIQAUdpTempBcp	DIQAUdpTempBcpEcsIdIdx	Np	No	No	No
DIRecoveryParameters	DIRecoveryParametersPkConstr	Yes	No	Yes	Yes
DITempGrans	DITempGransPkConstr	Yes	No	Yes	Yes
DITempPhantoms	DITempPhantomsDirFileNameIdx	No	No	No	No
DIThemes	DIThemePkConstr	Yes	No	Yes	Yes
DIThemes	DIThemesNameIdx	No	No	No	No
DIThemes	DIThemesConvSvclIdx	No	No	No	No
DIUpdGranulesTemp	DIUpdGransTempGranIdIdx	No	No	No	No
DIWebAccessLog	DIWebAccessLogIdx	No	No	No	Yes
DIXMLFilesToInsert	DIXMLFilesToInsertPkConstr	Yes	No	Yes	Yes

## 4.2 Segments

Sybase supports the declaration of segments. A segment is a named pointer to a storage device(s). Segments are used to physically allocate a database object to a particular storage

device. Segments defined for the Data Pool and all other subsystem databases are described in Table 4-3.

**Table 4-3. Segment Descriptions**

Segment Name Segment	Description
Default	Default data segment used if no other segment specified in the create statement.
Logsegment	SYSLOGS, Transaction Logs
Systemsegment	System tables and indexes

### 4.3 Caches

A cache is a block of memory that is used by Sybase to retain and manage pages that are currently being processed. By default, each database contains three caches:

Data cache – retains most recently accessed data and index pages

Procedure cache – retains most recently accessed stored procedure pages

User transaction log cache – transaction log pages that have not yet been written to disk for each user

The size of each of these default caches is a configurable item which is must be managed on a per DAAC basis. These caches may be increased or decreased by the DAAC DBA as needed.

The data cache can be further subdivided into named caches. A named cache is a block of memory that is named and used by the DBMS to store data pages for select tables and/or indexes. Assigning a database table to named cache causes accessed pages to be loaded into memory and retained. The named cache does not need to be allocated to accommodate the entire database table since the DBMS manages the cache according to use. Named caches greatly increase performance by eliminating the time associated for disk input and output (I/O). There is a named cache (dp\_cache) that is currently defined for the Data Pool Subsystem database. Named caches may be defined as the memory usage of the Data Pool database becomes well known and the DAACs move into an operational environment.


This page intentionally left blank.

# 5. Database Security

---

## 5.1 Approach

The database security discussed within this section is bounded to security implementation within the Sybase SQL Server DBMS. A Sybase general approach to security is adopted as illustrated in Figure 5-1.

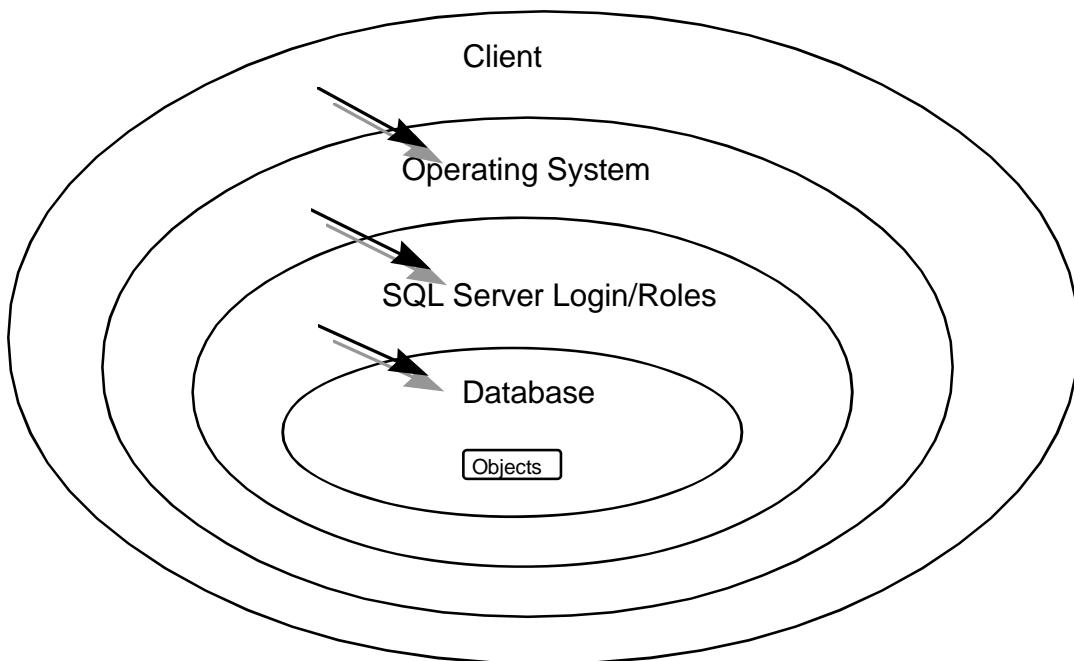

**Figure 5-1. Sybase General Approach to SQL Server Security<sup>1</sup>**

## 5.2 Users

The client (user) requires a SQL Server login to access the DBMS. The login is assigned to a user with certain related permissions for gaining access to particular objects (e.g., database tables, views, commands) within the database. The System Administrator may grant or revoke objects permissions for a login individually or based on defined group or roles.

---

<sup>1</sup> Reference Sybase Student Guide: *Advanced SQL Server Administration*.

## 5.3 Groups

Groups are a means of logically associating users with similar data access needs. Once a group has been defined, object and command permissions can be granted to that group. A user who is member of a group inherits all of the permissions granted to that group. No groups have been initially defined in the Data Pool Subsystem “default database. The DAACs should define database groups to support the database security requirements of their individual DAACs. Assigning each user to the appropriate group should control security for local DAAC users.

## 5.4 Roles

Roles were introduced in Sybase to allow a structured means for granting users the permissions needed to perform standard database administration activities and also provide a means for easily identifying such users. There are six pre-defined roles that may be assigned to a user. A definition of each of these roles follows, as well as a description of the types of activities that may be performed by each role.

**System Administrator** (*sa\_role*): This role is used to grant a specific user permissions needed to perform standard system administrator duties including:

- installing SQL server and specific SQL server modules
- managing the allocation of physical storage
- tuning configuration parameters
- creating databases

**Site Security Officer** (*sso\_role*): This role is used to grant a specific user the permissions needed to maintain SQL server security including:

- adding server logins
- administrating passwords
- managing the audit system
- granting users all roles except the *sa\_role*

**Operator** (*oper\_role*): This role is used to grant a specific user the permissions needed to perform standard functions for the database including:

- dumping transactions and databases
- loading transactions and databases

**Navigator** (*navigator\_role*): This role is used to grant a specific user the permissions needed to manage the navigation server.

**Replication** (*replication\_role*): This role is used to grant a specific user the permissions needed to manage the replication server.

**Sybase Technical Support** (*sybase\_ts\_role*): This role is used to grant a specific user the permissions needed to execute *database consistency checker* (*dbcc*), a Sybase supplied utility supporting commands that are normally outside of the realm of routine system administrator activities.

The DAACs should review these roles and assign them to the appropriate login and/or groups.

## 5.5 Login/Group Object Permissions

During initial database installation logins used by the ECS custom code were created and permissions assigned for access to the Data Pool Subsystem database. In addition, special database installation login, *dpl\_role*, was created to support database installation needs. For each login, the level of access is limited to that associated with their login, group or assigned group/role. Object Permissions are set within the installation scripts of the Data Pool Subsystem for each object and group/role.

Permissions are identified in Table 5-1. A specification of the object permissions is contained in Table 5-2.

**Table 5-1. Permission Key**

Permission	Description
A	All
S	Select
I	Insert
U	Update
D	Delete
E	Execute

**Table 5-2. Object Permissions (1 of 3)**

Group Name	Group Users	Delete	Insert	Select	Update	Execute	Object Name
EMSgroup	EcDbEMSDataExtractor			X			DistFTP
EMSgroup	EcDbEMSDataExtractor			X			DIGranuleAccess
datapool	All		X	X	X	X	ALL
datapool	All	X					DIGPolygon
datapool	All	X					DiBoundingRectangle

**Table 5-2. Object Permissions (2 of 3)**

Group Name	Group Users	Delete	Insert	Select	Update	Execute	Object Name
datapool	All	X					DIOrbitPolygons
nbgroup	All					X	ProcThemeEnabledForInsert
nbgroup	All					X	ProcGetUniqueIdOutput
nbgroup	All					X	ProcMakeThemeRetroactive
nbgroup	All		X				DlInsertActionQuerue
nbgroup	All			X			DIAccessRollup
nbgroup	All			X			DIActiveInsertProcesses
nbgroup	All			X			DIBoundingRectangle
nbgroup	All			X			DIBrowse
nbgroup	All			X			DIBrowseFile
nbgroup	All			X			DICartOrder
nbgroup	All			X			DICartOrderItem
nbgroup	All			X			DICartOrderItemBand
nbgroup	All			X			DICloudCoverSource
nbgroup	All			X			DICollectionGroup
nbgroup	All			X			DICollections
nbgroup	All			X			DICompressionAlgorithms
nbgroup	All			X			DIConfig
nbgroup	All			X			DIDimensionDayNight
nbgroup	All			X			DIDimensionGroupESDT
nbgroup	All			X			DIDimensionMP
nbgroup	All			X			DIDimensionMPScienceQAXref
nbgroup	All			X			DIDimensionPolygonXref
nbgroup	All			X			DIDimensionScienceQA
nbgroup	All			X			DIDimensionSpatialT6All
nbgroup	All			X			DIDimensionSpatialT6BR_Degree
nbgroup	All			X			DIDimensionTemporal
nbgroup	All			X			DIDimensionTimeOfDay
nbgroup	All			X			DIESDTCurrentDensityMap
nbgroup	All			X			DIFactDayNight
nbgroup	All			X			DIFactGroupESDT
nbgroup	All			X			DIFactQA
nbgroup	All			X			DIFactTemporalRange
nbgroup	All			X			DIFactTimeOfDay
nbgroup	All			X			DIFile
nbgroup	All			X			DIFileSystems

**Table 5-2. Object Permissions (3 of 3)**

Group Name	Group Users	Delete	Insert	Select	Update	Execute	Object Name
nbgroup	All			X			DIFilesToDelete
nbgroup	All			X			DIFTpAccessLog
nbgroup	All			X			DIGPolygon
nbgroup	All			X			DIGCloudCover
nbgroup	All			X			DIGranuleAccess
nbgroup	All			X			DIGranuleBrowseXref
nbgroup	All			X			DIGranuleExpirationPriority
nbgroup	All			X			DIGranuleHdfObjectsXref
nbgroup	All			X			DIGranuleSubscription
nbgroup	All			X			DIGranuleTiles
nbgroup	All			X			DIGranules
nbgroup	All			X			DIHEGLookup
nbgroup	All			X			DIHdf4thDimensions
nbgroup	All			X			DIHdfBands
nbgroup	All			X			DIHdfObjects
nbgroup	All			X			DIdentifier
nbgroup	All			X			DInsertActionQueue
nbgroup	All			X			DInsertActionQueue
nbgroup	All			X			DIMeasuredParameter
nbgroup	All			X			DINOSELookup
nbgroup	All			X			DIOMSGranules
nbgroup	All			X			DOIOrbitCalculatedSpatial
nbgroup	All			X			DOIOrbitPolygons
nbgroup	All			X			DIPlatInstrCode
nbgroup	All			X			DIProcAttributes
nbgroup	All			X			DIQAUdpFlagTemp
nbgroup	All			X			DIRecoveryParameters
nbgroup	All			X			DIThemes
nbgroup	All			X			DIUpdGranulesTemp
nbgroup	All			X			DIWebAccessLog
nbgroup	All			X			DIXMLFilesToInsert
nbgroup	All			X			EcDbDatabaseVersions

This page intentionally left blank.

## 6. Scripts

---

### 6.1 Installation Scripts

Scripts used to support installation of the Data Pool Subsystem database are listed in Table 6-1.

**Table 6-1. Installation Scripts**

Script File	Description
EcDIDbBuild	Script used to build the DPL database from scratch.

### 6.2 De-Installation Scripts

Scripts used to support de-installation of the Data Pool Subsystem database are listed in Table 6-2.

**Table 6-2. De-Installation Scripts**

Script File	Description
D IDbDropSchema	Script used to delete all schema and data from database.

### 6.3 Backup and Recovery Scripts

Scripts developed to perform backup and recovery of the Data Pool Subsystem database are listed in Table 6-3. These scripts should be configured to run automatically using the Unix chron facility. It is recommended that, transaction logs dumps (incremental dumps) are performed a minimum of 3 times each day. It is recommended that database dumps (full database dumps) are performed a minimum of once each day. Backup and recovery are M&O activities. At their discretion, DAACs may modify these backup/recovery scripts or utilize backup/recovery scripts developed by their local M&O staff.

**Table 6-3. Backup and Recovery Scripts**

Script File	Description
EcCoDbSyb_DumpDb	Dumps all databases for managed by the SQL server instance.
EcCoDbSyb_DumpTran	Dumps the transaction log for all databases managed by the SQL server.


## 6.4 Miscellaneous Scripts


Miscellaneous scripts applicable to the Data Pool Subsystem database are shown in Table 6-4.

**Table 6-4. Miscellaneous Scripts and Input Data Files**

Script	Description
EcDdmMonitorServer	Monitors segment usage and user levels for a selected SQL server. Superseded by DbVision COTS.
EcDdmSegmentUse	Monitors segment usage. Used by EcDdmMonitorServer. Superseded by DbVision COTS.
EcDdmUserCounts	Monitors user access. Used by EcDdmMonitorServer. Superseded by DbVision COTS.
EcCoDbSyb_CkErrorLog	Checks the error log for error messages warranting DBO attention. Superseded by DbVision.
EcCoDbSyb_DbStat	Updates index statistics for each table in the selected database.
EcCoDbSyb_DboMail	Emails DBA error notification via e-mail. Used by EcCoDbSyb_DumpDb/Tran and EcCoDbSyb_CkErrorLog scripts.



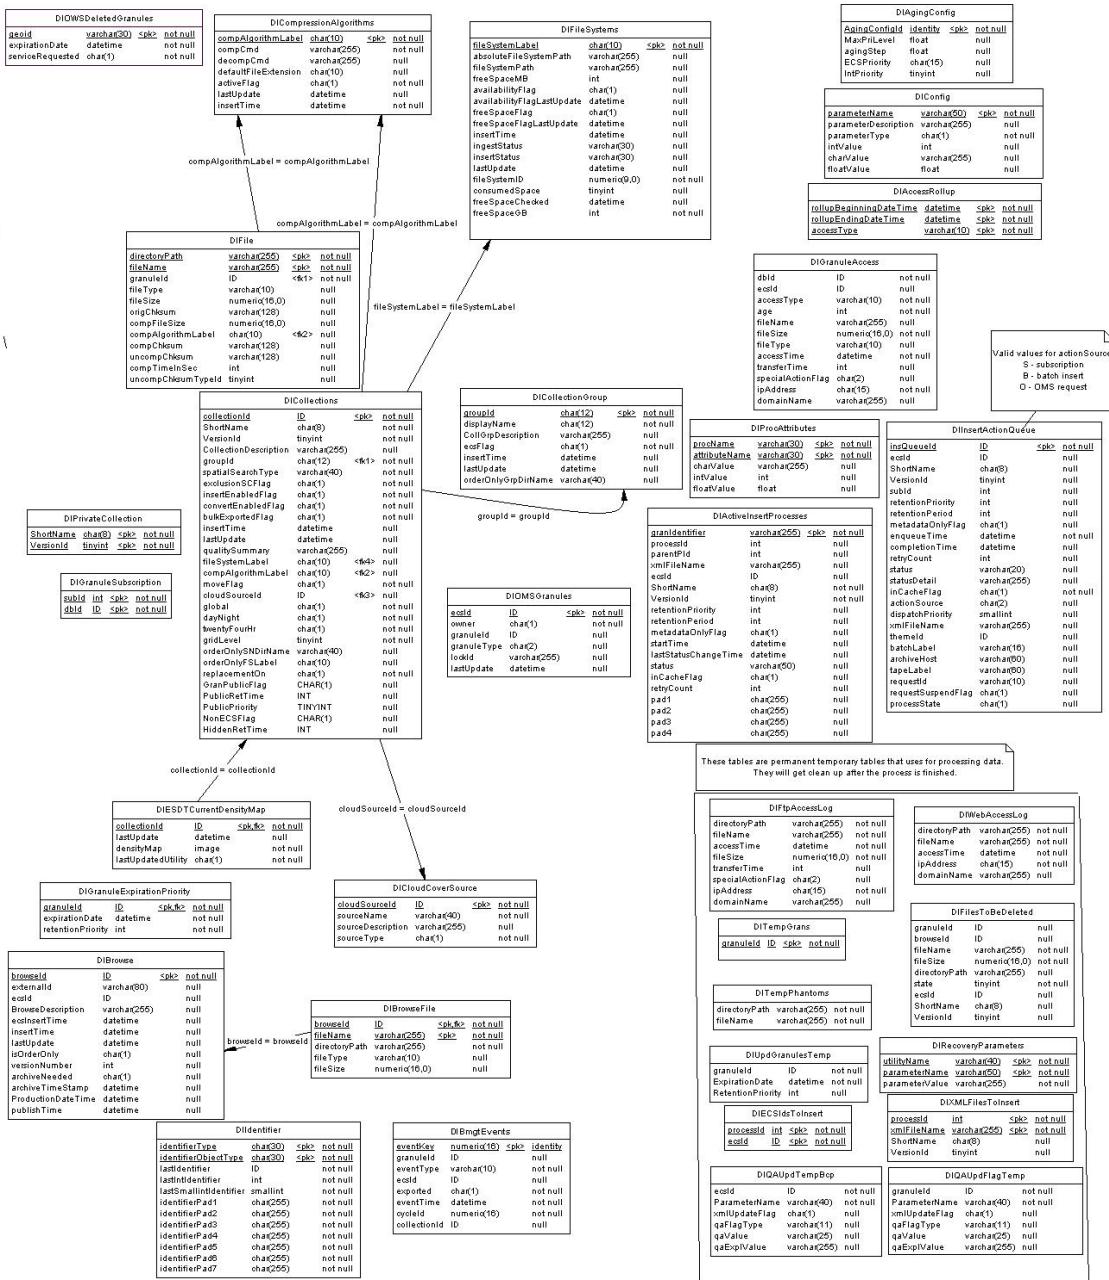

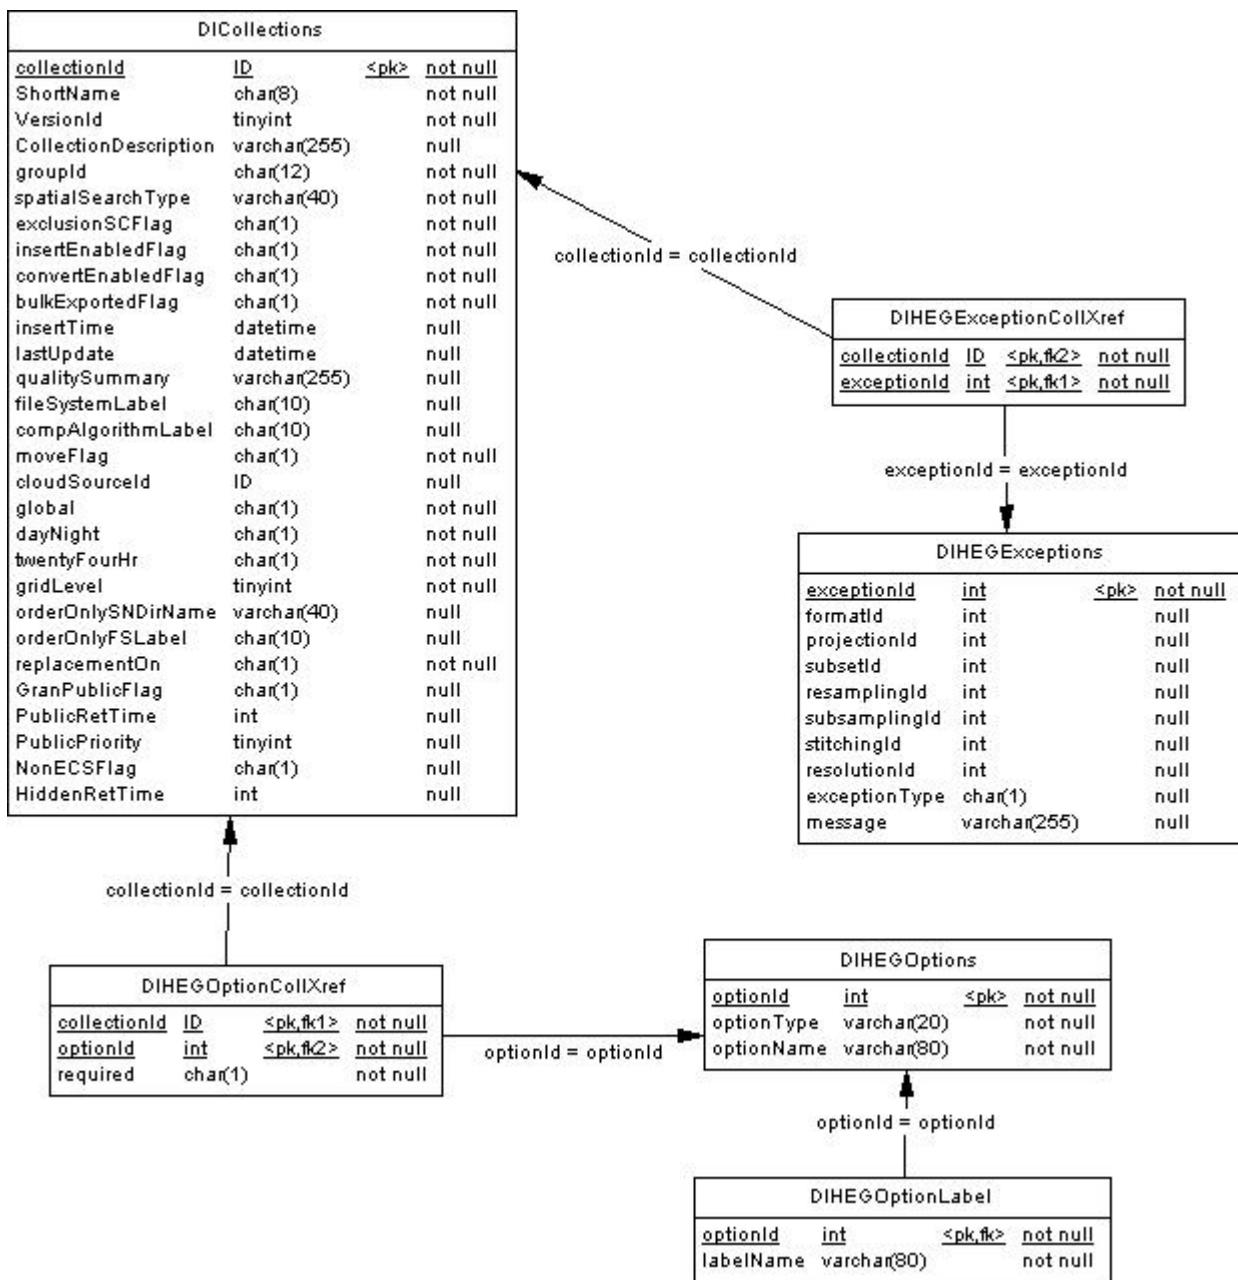

**Figure A-3. Data Pool HEG Configuration**

This page intentionally left blank.

## **Abbreviations and Acronyms**

---

ADSRV	Advertising Service CSCI
ANSI	American National Standards Institute
ASC	Ascending
BCP	Bulk Copy Utility
BMGT	Bulk Metadata Generation Tool
CASE	Computer Aided Software Engineering
CD	contractual delivery 214-001
CDRL	contract data requirements list
CDS	cell directory service
CI	configuration item
CONFIG	Configuration Registry Subsystem
COTS	commercial off-the-shelf (hardware or software)
CSCI	computer software configuration item
CSDT	Computer Science Data Type
CSMS	Communications and Systems Management Segment (ECS)
CSS	Communications Subsystem
DAAC	Distributed Active Archive Center
DESC	Descending
DBMS	Database Management System
DCN	Document Change Notice
DDICT	Data Dictionary CSCI
DDIST	Data Distribution Services CSCI
DDN	Data Delivery Notice
DID	data item description
DM	Data Management
DMS	Data Management Subsystem
DP	Data Provider
DPAD	Data Pool Action Driver

DPIU	Data Pool Insert Utility
DPL	Data Pool Subsystem
DPS	Data Processing Subsystem
DSS	Data Server Subsystem
ECS	EOSDIS Core System
EDC	EROS Data Center
EDHS	ECS Data Handling System
EDOS	EOS Data and Operations System
EOS	Earth Observing System
EOSDIS	Earth Observing System Data and Information System
ERD	Entity Relationship Diagram
EROS	Earth Resources Observation System
ESDIS	Earth Science Data and Information System (GSFC)
ESDT	Earth science data types
FK	Foreign Key
FTP	File Transfer Protocol
GIS	Geographic Information System
GSFC	Goddard Space Flight Center
GUI	graphic user interface
HTML	Hypertext Markup Language
HTTP	Hypertext Transport Protocol
HWCI	Hardware Configuration Item
ICD	interface control document
ID	identification
INGEST	Ingest Services CSCI
IOS	Interoperability Subsystem
IP	Internet Protocol
ISS	Internetworking Subsystem
IV&V	independent verification and validation
LaRC	Langley Research Center (DAAC)
MCF	Metadata Configuration File
MSFC	Marshall Space Flight Center

MSS	Management Support Subsystem
OGC	Open Geospatial Consortium
OWS	OGC Web Services
PDF	Portable Document Format
PDPS	Planning and Data Processing Subsystem
PK	Primary Key
PLANG	Production Planning CSCI
PLS	Planning Subsystem
RDBMS	Relational Data Base Management System
RPC	Remote Procedure Call
SDSRV	Science Data Server
STMGT	Storage Management Software CSCI
SUBSRV	Subscription Server
URL	Universal Reference Locator
WWW	World-Wide Web

This page intentionally left blank.