

311-EMD-226

## **EOSDIS Maintenance and Development Project**

# **Release 7.22 Data Pool (DPL) Database Design and Schema Specifications for the EMD Project**

March 2009

Raytheon Information Solutions  
Riverdale, Maryland


This page intentionally left blank.

**Release 7.22**  
**Data Pool (DPL) Database Design and Schema**  
**Specifications for the EMD Project**

**March 2009**

Prepared Under Contract NAS5-03098  
CDRL Item # 023

**RESPONSIBLE ENGINEER**

  
\_\_\_\_\_  
Robert Hartranft, Senior Principal Engineer  
EOSDIS Maintenance and Development Project

*3/17/2009*  
Date

**SUBMITTED BY**

  
\_\_\_\_\_  
Art Cohen, EMD Task 201 Manager  
EOSDIS Maintenance and Development Project

*3/17/09*  
Date

**Raytheon Information Solutions**  
Riverdale, Maryland

This page intentionally left blank.

# Preface

---

This document is a formal contract deliverable. It requires Government review and approval within 45 business days. Changes to this document will be made by document change notice (DCN) or by complete revision.

Any questions should be addressed to:

Data Management Office  
The EMD Project Office  
Raytheon Information Solutions  
5700 Rivertech Court  
Riverdale, Maryland 20737

## Revision History

Document Number	Status/Issue	Publication Date	CCR Number
311-EMD-226	Original	March 2009	09-0083

This document describes the data design and database specification for the Subscription Server subsystem. It is one of eleven documents comprising the detailed database design specifications for each of the EMD subsystems.

The subsystem database design specifications for the as delivered system include:

311-EMD-220	Release 7.22 INGEST (INS) Subsystem Database Design and Schema Specifications for the EMD Project
311-EMD-224	Release 7.22 Order Manager (OMS) Database Design and Schema Specifications for the EMD Project
311-EMD-225	Release 7.22 Spatial Subscription Server (SSS) Database Design and Schema Specifications for the EMD Project
311-EMD-226	Release 7.22 Data Pool Database (DPL) Design and Schema Specifications for the EMD Project
311-EMD-227	Release 7.22 Archive Inventory Management (AIM) Database Design and Schema Specifications for the EMD Project

Entity Relationship Diagrams (ERDs) presented in this document have been exported directly from tools and some cases contain too much detail to be easily readable within hard copy page constraints. The reader is encouraged to view these drawings on-line using the Portable Document Format (PDF) electronic copy available via the ECS Data Handling System (EDHS) on the world-wide web at <http://edhs1.gsfc.nasa.gov>.

# Abstract

---

This document outlines Release 7 “as-built” database design and database schema of the Data Pool database including the physical layout of the database and initial installation parameters.

**Keywords:** data, database, design, configuration, database installation, scripts, security, data model, data dictionary, replication, performance tuning, SQL server, database security, replication, database scripts

This page intentionally left blank.

# Contents

---

## Preface

## Abstract

## Contents

### 1. Introduction

1.1	Purpose and Scope .....	1-1
1.2	Document Organization .....	1-1

### 2. Related Documents

2.1	Applicable Documents .....	2-1
2.2	Information Documents .....	2-2

### 3. Data Design

3.1	Database Overview .....	3-1
3.1.1	Physical Data Model Entity Relationship Diagram .....	3-1
3.1.2	Tables .....	3-2
3.1.3	Columns .....	3-6
3.1.4	Domains .....	3-68
3.1.5	Defaults .....	3-69
3.1.6	Views .....	3-70
3.1.7	Integrity Constraints .....	3-71
3.1.8	Triggers .....	3-75
3.1.9	Stored Procedures .....	3-76
3.2	File Usage .....	3-107

## 4. Performance and Tuning Factors

4.1	Indexes .....	4-1
4.2	Segments .....	4-5
4.3	Caches .....	4-6

## 5. Database Security

5.1	Approach.....	5-1
5.2	Users .....	5-1
5.3	Groups.....	5-2
5.4	Roles .....	5-2
5.5	Login/Group Object Permissions.....	5-3

## 6. Scripts

6.1	Installation Scripts .....	6-1
6.2	De-Installation Scripts .....	6-1
6.3	Backup and Recovery Scripts .....	6-1
6.4	Miscellaneous Scripts .....	6-2

## List of Figures

Figure 3-1.	ERD Key .....	3-1
Figure 3-2a.	DataPool View for EMS Extract Processing.....	3-70
Figure 3-2b.	DataPool View for MISR Processing Criteria .....	3-71
Figure 5-1.	Sybase General Approach to SQL Server Security .....	5-1

## List of Tables

Table 3-1.	Data Tables Listing .....	3-2
Table 3-2.	EcDbDatabaseVersions .....	3-4
Table 3-3.	DIBmgtEvents .....	3-5

Table 3-4. DILogicalLock.....	3-5
Table 3-5. DIBatchBrowseToDelete.....	3-5
Table 3-6. DIBatchGransToDelete .....	3-5
Table 3-7. DIBcpGransToDelete .....	3-6
Table 3-8. DIDPCVHistory .....	3-6
Table 3-9. DIRestoreRequests .....	3-6
Table 3-10. DIRestoreOlaLock .....	3-7
Table 3-11. DIRestoreOlaFilesFromTape.....	3-7
Table 3-12. DIRestoreTapeFilesFromOla.....	3-7
Table 3-13. DICollectionGroup .....	3-8
Table 3-14. DICollections.....	3-9
Table 3-15. DIThemes .....	3-10
Table 3-16. DIGranuleThemeXref.....	3-10
Table 3-17. DIGranuleSubscription.....	3-10
Table 3-18. DIGranules.....	3-11
Table 3-19. DIGranuleExpirationPriority .....	3-11
Table 3-20. DIMeasuredParameter .....	3-12
Table 3-21. DIBrowse.....	3-12
Table 3-22. DIBrowseFile.....	3-13
Table 3-23. DIGranuleBrowseXref.....	3-13
Table 3-24. DIFile.....	3-13
Table 3-25. DIBoundingRectangle .....	3-14
Table 3-26. DIGPolygon.....	3-14
Table 3-27. DIOrbitCalculatedSpatial .....	3-14
Table 3-28. DIOrbitPolygons.....	3-15
Table 3-29. DIPlatInstrCode .....	3-15
Table 3-30. DIConfig.....	3-15
Table 3-31. DIFilesToBeDeleted.....	3-16

Table 3-32. DI TempGrans .....	3-16
Table 3-33. DI TempPhantoms .....	3-16
Table 3-34. DI ProcAttributes .....	3-17
Table 3-35. DI InsertActionQueue .....	3-17
Table 3-36. DI ActiveInsertProcesses .....	3-18
Table 3-37. DI FtpAccessLog .....	3-18
Table 3-38. DI WebAccessLog .....	3-19
Table 3-39. DI AccessRollup .....	3-19
Table 3-40. DI GranuleAccess .....	3-19
Table 3-41. DI DimensionGroupESDT .....	3-20
Table 3-42. DI DimensionDayNight .....	3-20
Table 3-43. DI DimensionTimeOfDay .....	3-20
Table 3-44. DI DimensionMP .....	3-21
Table 3-45. DI DimensionScienceQA .....	3-21
Table 3-46. DI DimensionMPScienceQAXref .....	3-21
Table 3-47. DI DimensionTemporal .....	3-22
Table 3-48. DI DimensionSpatialT6All .....	3-22
Table 3-49. DI DimensionPolygonXref .....	3-22
Table 3-50. DI FactGroupESDT .....	3-23
Table 3-51. DI FactDayNight .....	3-23
Table 3-52. DI FactTimeOfDay .....	3-23
Table 3-53. DI FactQA .....	3-23
Table 3-54. DI FactTemporalRange .....	3-24
Table 3-55. DI Identifier .....	3-24
Table 3-56. DI UpdGranulesTemp .....	3-25
Table 3-57. DI XMLFilesToInsert .....	3-25
Table 3-58. DI ECSIdsToInsert .....	3-25
Table 3-59. DI HEGLookup .....	3-25

Table 3-60. DI CartOrder .....	3-26
Table 3-61. DI CartOrderItem .....	3-26
Table 3-62. DIQAUpdFlagTemp .....	3-27
Table 3-63. DIRecoveryParameters .....	3-27
Table 3-64. DIQAUpdTempBcp.....	3-27
Table 3-65. DIFileSystems .....	3-28
Table 3-66. DICompressionAlgorithms.....	3-28
Table 3-67. DI CloudCoverSource .....	3-29
Table 3-68. DI GrCloudCover .....	3-29
Table 3-69. DI GranuleTiles .....	3-29
Table 3-70. DI ES DT CurrentDensityMap .....	3-29
Table 3-71. DI OM S Granules .....	3-30
Table 3-72. DI CartOrderItemBand .....	3-30
Table 3-73. DI Hdf Objects.....	3-30
Table 3-74. DI Hdf Bands .....	3-31
Table 3-75. DI Hdf Fields .....	3-31
Table 3-76. DI Hdf 4th Dimensions.....	3-31
Table 3-77. DI GranuleHdfObjectsXref .....	3-31
Table 3-78. DI NOSE Lookup .....	3-32
Table 3-79. DI StatGroupESDT .....	3-32
Table 3-80. DI StatESDT .....	3-32
Table 3-81. DI StatTheme .....	3-32
Table 3-82. DI AgingConfig .....	3-33
Table 3-83. DI HEG Options .....	3-33
Table 3-84. DI HEG OptionLabel.....	3-33
Table 3-85. DI HEG OptionCollXref.....	3-33
Table 3-86. DI HEG Exceptions .....	3-34
Table 3-87. DI HEG ExceptionCollXref .....	3-34

Table 3-88. DIGranuleOWS .....	3-34
Table 3-89. DIOWSDeletedGranules .....	3-35
Table 3-90. DIAdAlert .....	3-35
Table 3-91. DIAdMessages.....	3-35
Table 3-92. DIBulkWrkTable .....	3-36
Table 3-93. DIPrivateCollection .....	3-36
Table 3-94. Column Descriptions .....	3-37
Table 3-95. Dependencies on Table: DICollectionGroup .....	3-71
Table 3-96. Dependencies on Table: DICollections .....	3-72
Table 3-97. Dependencies on Table: DIGranules .....	3-72
Table 3-98. Dependencies on Table: DIBrowse .....	3-72
Table 3-99. Dependencies on Table: DIPlatInstrCode .....	3-72
Table 3-100. Dependencies on Table: DIDimensionSpatialT6All .....	3-73
Table 3-101. Dependencies on Table: DIDimensionTimeOfDay.....	3-73
Table 3-102. Dependencies on Table: DIDimensionDayNight .....	3-73
Table 3-103. Dependencies on Table: DIDimensionGroupESDT.....	3-73
Table 3-104. Dependencies on Table: DIOrbitPolygons .....	3-73
Table 3-105. Dependencies on Table: DIThemes.....	3-73
Table 3-106. Dependencies on Table: DICartOrder .....	3-73
Table 3-107. Dependencies on Table: DIDimensionMP .....	3-73
Table 3-108. Dependencies on Table: DIDimensionScienceQA.....	3-74
Table 3-109. Dependencies on Table: DICompressionAlgorithms .....	3-74
Table 3-110. Dependencies on Table: DIFileSystems.....	3-74
Table 3-121. Dependencies on Table: DICloudCoverSource.....	3-74
Table 3-112. Dependencies on Table: DIHdfObjects .....	3-74
Table 3-113. Dependencies on Table: DIHdfBands .....	3-74
Table 3-114. Dependencies on Table: DIHdfFields .....	3-74
Table 3-115. Dependencies on Table: DIHdf4thDimensions .....	3-74

Table 3-116. Dependencies on Table: DICartOrderItem.....	3-75
Table 3-117. Dependencies on Table: DIHEGOptions .....	3-75
Table 3-118. Dependencies on Table: DIHEGExceptions .....	3-75
Table 3-119. Dependencies on Table: DIRestoreRequests.....	3-75
Table 3-120. Trigger Listing.....	3-76
Table 3-121. Procedure Listing .....	3-77
Table 4-1. Index Type Key .....	4-1
Table 4-2. Index List.....	4-1
Table 4-3. Segment Descriptions.....	4-6
Table 5-1. Permission Key.....	5-3
Table 5-2. Object Permissions .....	5-3
Table 6-1. Installation Scripts.....	6-1
Table 6-2. De-Installation Scripts.....	6-1
Table 6-3. Backup and Recovery Scripts.....	6-1
Table 6-4. Miscellaneous Scripts and Input Data Files .....	6-2

## **Appendix A. Entity Relationship Diagram**

### **Abbreviations and Acronyms**

This page intentionally left blank.

# 1. Introduction

---

## 1.1 Purpose and Scope

The purpose of Data Pool Database Design and Database Schema Specification document is to describe the database design and schema specifications implemented to support the data requirements of Release 7 Data Pool CSCI.

## 1.2 Document Organization

Section 3 provides a detailed description of all objects used in the DataPool database including all object types with detailed definitions where appropriate.

Section 4 describes the performance strategies used within the DataPool database including indexes, segments and any defined caches used for memory optimization.

Section 5 describes the security measures used within the DataPool database. This includes strategies used at the user, group, object, server and role levels.

Section 6 describes custom utilities that provide means of installing and backing up the DataPool database including fault recovery mechanisms.

This page intentionally left blank.

## 2. Related Documents

---

### 2.1 Applicable Documents

The following documents, including Internet links, are referenced in this document, or are directly applicable, or contain policies or other directive matters that are binding upon the content of this volume.

305-EMD-220	Release 7.22 Segment Design Specifications for the EMD Project
920-TDN-009	DAAC Hardware Database Mapping/NSIDC
920-TDE-009	DAAC Hardware Database Mapping/EDC
920-TDL-009	DAAC Hardware Database Mapping/LARC
920-TDN-010	DAAC Database Configuration/NSIDC
920-TDE-010	DAAC Database Configuration/EDC
920-TDL-010	DAAC Database Configuration/LARC
920-TDN-011	DAAC Sybase Log Mapping/NSIDC
920-TDE-011	DAAC Sybase Log Mapping/EDC
920-TDL-011	DAAC Sybase Log Mapping/LARC
922-TDN-013	Disk Partitions/NSIDC
922-TDE-013	Disk Partitions/EDC
922-TDL-013	Disk Partitions/LARC

These documents are maintained as part of the EMD baseline and available on the world wide web at the URL: <http://cmdm.east.hitc.com/baseline>. Please note that this is a partial mirror site in that some items are not available (they are identified) since this is OPEN to all. This site may also be reached through the EDHS homepage. Scroll page to the connections line and click on the EMD Baseline Information System link.

## **2.2 Information Documents**

The following documents, although not directly applicable, amplify or clarify the information presented in this document. These documents are not binding on this document.

609-EMD-220                      Release 7.22 Operations Tools Manual for the EMD Project

611-EMD-220                      Release 7.22 Mission Operation Procedures for the EMD Project

# 3. Data Design


---

## 3.1 Database Overview

The Data Pool database implements the large majority of the persistent data requirements for the Data Pool subsystem. The database is designed in such a manner as to satisfy business policy while maintaining data integrity and consistency. Database tables are implemented using the Sybase Relational Database Management system (RDBMS). All components of the Data Pool database are described in the sections which follow, in sufficient detail to support maintenance needs.

### 3.1.1 Physical Data Model Entity Relationship Diagram

The Entity Relationship Diagram (ERD) presents a schematic depiction of the Data Pool physical data model. The ERDs presented here for the Data Pool database were produced using the Power Designor Data Architect Computer Aided Software Engineering (CASE) tool. ERDs represent the relationship between entities or database tables. On ERDs, tables are represented by rectangles and relationships are represented as arrow (see Figure 3-1).

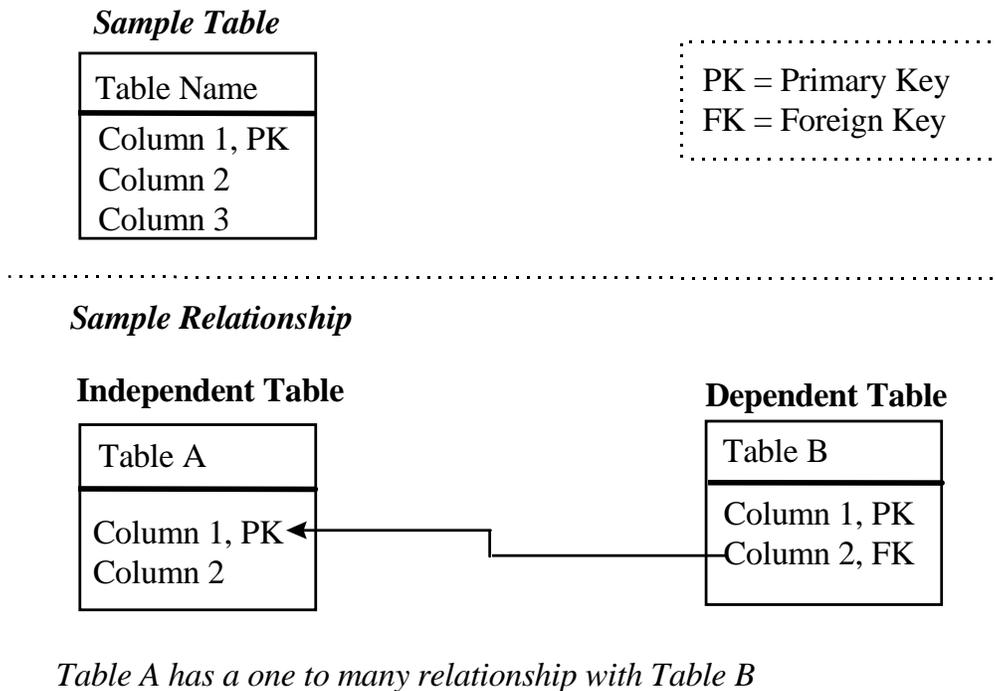

**Figure 3-1. ERD Key**

### 3.1.2 Tables

A listing of each the tables in the Data Pool database is given here. A brief definition of each of these tables follows including a listing of the columns comprising the tables in Table 3-1. The column list indicates if the column is part of the primary key for the table, that is, if the columns can be used alone or in combination with other primary key columns to uniquely identify a single row in the table. The column list also indicates whether the column is a mandatory attribute that must be included in every row.

**Table 3-1. Data Tables Listing (1 of 3)**

Table Name
DIAccessRollup
DIActiveInsertProcesses
DIAdAlert
DIAdMessages
DI AgingConfig
DIBatchBrowseToDelete
DIBatchGransToDelete
DIBcpGransToDelete
DIBmgtEvents
DIBoundingBox
DIBrowse
DIBrowseFile
DIBulkWrkTable
DI CartOrder
DI CartOrderItem
DI CartOrderItemBand
DI CloudCoverSource
DI CollectionGroup
DI Collections
DI CompressionAlgorithms
DI Config
DI DimensionDayNight
DI DimensionGroupESDT
DI DimensionMP
DI DimensionMPScienceQAXref
DI DimensionPolygonXref
DI DimensionScienceQA
DI DimensionSpatialT6All
DI DimensionTemporal
DI DimensionTimeOfDay
DI DPCVHistory

**Table 3-1. Data Tables Listing (2 of 3)**

Table Name
DIECSIdsToInsert
DIESDTCurrentDensityMap
DIFactDayNight
DIFactGroupESDT
DIFactQA
DIFactTemporalRange
DIFactTimeOfDay
DIFile
DIFilesToBeDeleted
DIFileSystems
DIFtpAccessLog
DIGPolygon
DIGranuleAccess
DIGranuleBrowseXref
DIGranuleExpirationPriority
DIGranuleHdfObjectsXref
DIGranuleOWS
DIGranules
DIGranuleSubscription
DIGranuleThemeXref
DIGranuleTiles
DIGrCloudCover
DIHdf4thDimensions
DIHdfBands
DIHdfFields
DIHdfObjects
DIHEGExceptionCollXref
DIHEGExceptions
DIHEGLookup
DIHEGOptionCollXref
DIHEGOptionLabel
DIHEGOptions
DIIdentifier
DIInsertActionQueue
DILogicalLock
DIMeasuredParameter
DINOSELookup
DIOMSGranules
DIOrbitCalculatedSpatial
DIOrbitPolygons

**Table 3-1. Data Tables Listing (3 of 3)**

Table Name
DIOWSDeletedGranules
DIPlatInstrCode
DIPrivateCollection
DIProcAttributes
DIQAUpdFlagTemp
DIQAUpdTempBcp
DIRecoveryParameters
DIRestoreOlaFilesFromTape
DIRestoreOlaLock
DIRestoreRequests
DIRestoreTapeFilesFromOla
DIStatESDT
DIStatGroupESDT
DIStatTheme
DI TempGrans
DI TempPhantoms
DI Themes
DIUpdGranulesTemp
DIWebAccessLog
DIXMLFilesToInsert
EcDbDatabaseVersions

Table 3-2 identifies the current version level of the Data Pool database.

**Table 3-2. EcDbDatabaseVersions**

Column Name	Data Type	PK Column	Mandatory Column
EcDbSchemaVersionId	smallint	Yes	Yes
EcDbDropVersion	char(64)	Yes	Yes
EcDbDropDescription	varchar(255)	No	No
EcDbCurrentVersionFlag	char(1)	No	No
EcDbDatabaseName	varchar(255)	No	No
EcDbDropInstallDate	datetime	No	No
EcDbSybaseVersion	varchar(255)	No	No
EcDbSybaseServer	varchar(255)	No	No
EcDbComments	varchar(255)	No	No
EcDbUpdateProcess	varchar(255)	No	No

Table 3-3 records the events involved in BMGT processing.

**Table 3-3. DIBmgmtEvents**

Column Name	Data Type	PK Column	Mandatory Column
eventKey	numeric(16)	Yes	Yes
granuleId	ID	No	No
eventType	char(10)	No	Yes
ecsId	ID	No	No
exported	char(1)	No	Yes
eventTime	datetime	No	Yes
cycleId	numeric(16)	No	Yes
collectionId	ID	No	No

Table 3-4 is used as a mutex for the deletion of granules. In order to delete a single granule, one must first update this table. While this table is locked, other deletion requests must wait.

**Table 3-4. DILogicalLock**

Column Name	Data Type	PK Column	Mandatory Column
logicalLock	smallint	No	No

Table 3-5 is used by DPL Cleanup to list browse granules eligible for deletion.

**Table 3-5. DIBatchBrowseToDelete**

Column Name	Data Type	PK Column	Mandatory Column
browseId	ID	Yes	Yes
status	char(1)	No	No

Table 3-6 is used by DPL Cleanup to list non-browse granules eligible for deletion.

**Table 3-6. DIBatchGransToDelete**

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	Yes	Yes
status	char(1)	No	No

Table 3-7 is used by DPL Cleanup as a starting point to list all granules eligible for deletion.

**Table 3-7. DIBcpGransToDelete**

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	Yes	Yes

Table 3-8 is used to record a history of Data Pool checksum verifications.

**Table 3-8. DIDPCVHistory**

Column Name	Data Type	PK Column	Mandatory Column
runId	numeric(16)	No	Yes
processId	int	Yes	Yes
hostName	varchar(20)	Yes	Yes
inputParameter	varchar(255)	No	Yes
startTime	datetime	No	Yes
endTime	datetime	No	No
numFilesChecksummed	numeric(16)	No	Yes
numFilesChecksumFailed	numeric(16)	No	Yes
numFilesChksumMisMatch	numeric(16)	No	Yes
lastUpdate	datetime	No	Yes
status	varchar(255)	No	Yes

Table 3-9 is used to store requests to restore a file from tape or vice versa.

**Table 3-9. DIRestoreRequests**

Column Name	Data Type	PK Column	Mandatory Column
requestId	numeric(8)	Yes	Yes
type	varchar(20)	No	Yes
commandLine	varchar(255)	No	Yes
status	varchar(20)	No	Yes
startTime	datetime	No	Yes
finishTime	datetime	No	No

Table 3-10 is used as a mutex when updating restore request information.

**Table 3-10. DIRestoreOlaLock**

Column Name	Data Type	PK Column	Mandatory Column
myLock	int	Yes	Yes

Table 3-11 is used to track the process of restoring a file from tape.

**Table 3-11. DIRestoreOlaFilesFromTape**

Column Name	Data Type	PK Column	Mandatory Column
dbld	numeric(8)	Yes	Yes
ShortName	char(8)	No	No
VersionId	tinyint	No	No
dplId	numeric(16)	No	No
ecsId	numeric(16)	No	No
isOrderOnly	char(1)	No	No
versionNumber	int	No	No
fileType	varchar(10)	No	No
dplFileName	varchar(255)	No	No
dplDirectoryPath	varchar(255)	No	No
ecsFileName	varchar(255)	No	No
ecsDirectoryPath	varchar(255)	No	No
mediald	varchar(12)	No	No
startBlockNumber	numeric(16)	No	No
fileSize	int	No	No
checksumType	varchar(16)	No	No
checksum	varchar(128)	No	No
status	varchar(20)	No	No
statusDetail	varchar(255)	No	No
requestId	numeric(8)	No	Yes

Table 3-12 is used to track the process of restoring tape files from the online archive.

**Table 3-12. DIRestoreTapeFilesFromOla (1 of 2)**

Column Name	Data Type	PK Column	Mandatory Column
dbld	numeric(8)	Yes	Yes
ShortName	char(8)	No	No
VersionId	tinyint	No	No
dplId	numeric(16)	No	No

**Table 3-12. DIRestoreTapeFilesFromOla (2 of 2)**

<b>Column Name</b>	<b>Data Type</b>	<b>PK Column</b>	<b>Mandatory Column</b>
ecsId	numeric(16)	No	No
isOrderOnly	char(1)	No	No
versionNumber	int	No	No
fileType	varchar(10)	No	No
dplFileName	varchar(255)	No	No
dplDirectoryPath	varchar(255)	No	No
ecsFileName	varchar(255)	No	No
ecsDirectoryPath	varchar(255)	No	No
mediaId	varchar(12)	No	No
fileSize	int	No	No
checksumType	varchar(16)	No	No
checksum	varchar(128)	No	No
status	varchar(20)	No	No
statusDetail	varchar(255)	No	No
requestId	numeric(8)	No	Yes

Table 3-13 contains information about Data Pool collection groups. Collection groups are based on the ECS Bulk Metadata Generation Tool collection groups, and represent groupings of ECS collections by instrument and mission (e.g. MOAT).

**Table 3-13. DICollectionGroup**

<b>Column Name</b>	<b>Data Type</b>	<b>PK Column</b>	<b>Mandatory Column</b>
groupId	char(12)	Yes	Yes
displayName	char(12)	No	Yes
CollGrpDescription	varchar(255)	No	No
ecsFlag	char(1)	No	Yes
insertTime	datetime	No	No
lastUpdate	datetime	No	No
orderOnlyGrpDirName	varchar(40)	No	No

Table 3-14 contains information about Data Pool collections. It includes the short name and version of the collection and flags to determine whether data from the collection may be stored in the Data Pool.

**Table 3-14. DICollections**

Column Name	Data Type	PK Column	Mandatory Column
collectionId	ID	Yes	Yes
ShortName	char(8)	No	Yes
VersionId	tinyint	No	Yes
CollectionDescription	varchar(255)	No	No
groupId	char(12)	No	Yes
spatialSearchType	varchar(40)	No	Yes
exclusionSCFlag	char(1)	No	Yes
insertEnabledFlag	char(1)	No	Yes
convertEnabledFlag	char(1)	No	Yes
bulkExportedFlag	char(1)	No	Yes
insertTime	datetime	No	No
lastUpdate	datetime	No	No
qualitySummary	varchar(255)	No	No
fileSystemLabel	varchar(10)	No	Yes
compAlgorithmLabel	char(10)	No	No
moveFlag	char(1)	No	Yes
cloudSourceId	ID	No	No
global	char(1)	No	Yes
dayNight	char(1)	No	Yes
twentyFourHr	char(1)	No	Yes
gridLevel	tinyint	No	Yes
orderOnlySNDirName	varchar(40)	No	No
orderOnlyFSLabel	char(10)	No	No
replacementOn	char(1)	No	Yes
GranPublicFlag	char(1)	No	No
PublicRetTime	int	No	No
PublicPriority	tinyint	No	No
NonECSFlag	char(1)	No	No
HiddenRetTime	int	No	No
NominalCoverageRule	varchar(40)	No	No

Table 3-15 contains information about Data Pool themes. It includes the theme name and flags to determine whether granules associated with the theme may be stored in the Data Pool and whether the theme is allowed for web drill down.

**Table 3-15. DIThemes**

Column Name	Data Type	PK Column	Mandatory Column
themeld	ID	Yes	Yes
name	varchar(40)	No	Yes
themeDescription	varchar(255)	No	No
insertEnabledFlag	char(1)	No	Yes
webVisibleFlag	char(1)	No	Yes
preConvertEnabledFlag	char(1)	No	No
serviceRequested	char(1)	No	No
insertTime	datetime	No	No
lastUpdate	datetime	No	No

Table 3-16 contains cross-reference information between Data Pool science granules and their associated themes.

**Table 3-16. DIGranuleThemeXref**

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	Yes	Yes
themeld	ID	Yes	Yes
collectionId	ID	No	Yes

Table 3-17 table provides a cross-reference that relates each granule in the Data Pool to the list of subscriptions that caused its insertion.

**Table 3-17. DIGranuleSubscription**

Column Name	Data Type	PK Column	Mandatory Column
subId	int	Yes	Yes
dbId	ID	Yes	Yes

Table 3-18 is the central table of the Data Pool database. It contains the core attributes for all science granules in the Data Pool. It also includes the range date and time attributes for each granule.

**Table 3-18. DIGranules**

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	Yes	Yes
externalId	varchar(80)	No	No
ecslId	ID	No	No
collectionId	ID	No	Yes
ShortName	char(8)	No	Yes
VersionId	tinyint	No	Yes
RangeBeginningDate	datetime	No	No
RangeBeginningTime	varchar(20)	No	No
RangeEndingDate	datetime	No	No
RangeEndingTime	varchar(20)	No	No
DayNightFlag	char(5)	No	No
sizeMB	float	No	No
ecslInsertTime	datetime	No	No
insertTime	datetime	No	No
lastUpdate	datetime	No	No
isOrderOnly	char(1)	No	No
versionNumber	int	No	No
archiveNeeded	char(1)	No	No
archiveTimeStamp	datetime	No	No
localGranuleId	varchar(80)	No	No
publishTime	datetime	No	No

Table 3-19 contains the expiration date and retention priority for each granule in Data Pool.

**Table 3-19. DIGranuleExpirationPriority**

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	Yes	Yes
expirationDate	datetime	No	Yes
retentionPriority	int	No	Yes

Table 3-20 contains one row for each measured parameter associated with a granule in the Data Pool. All data in this table are copied from the DsMdMeasureParameter table in the ECS AIM database.

**Table 3-20. DIMeasuredParameter**

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	Yes	Yes
ParameterName	varchar(80)	Yes	Yes
ScienceQualityFlag	varchar(25)	No	No
OperationalQualityFlag	varchar(20)	No	No
AutomaticQualityFlag	varchar(64)	No	No
ScienceQualityFlagExplan	varchar(255)	No	No
OperationalQualityFlagExplan	varchar(255)	No	No
AutomaticQualityFlagExplan	varchar(255)	No	No
QAPercentMissingData	int	No	No
QAPercentOutOfBoundsData	int	No	No
QAPercentInterpolatedData	int	No	No
QAPercentCloudCover	int	No	No

Table 3-21 contains information about Browse granules in the Data Pool.

**Table 3-21. DIBrowse**

Column Name	Data Type	PK Column	Mandatory Column
browseId	ID	Yes	Yes
externalId	varchar(80)	No	No
ecsId	ID	No	No
BrowseDescription	varchar(255)	No	No
ecsInsertTime	datetime	No	No
insertTime	datetime	No	No
lastUpdate	datetime	No	No
isOrderOnly	char(1)	No	No
versionNumber	int	No	No
archiveNeeded	char(1)	No	No
archiveTimeStamp	datetime	No	No
ProductionDateTime	datetime	No	No
publishTime	datetime	No	No

Table 3-22 contains information about Browse files in the Data Pool.

**Table 3-22. DIBrowseFile**

Column Name	Data Type	PK Column	Mandatory Column
browseId	ID	Yes	Yes
fileName	varchar(255)	Yes	Yes
directoryPath	varchar(255)	No	Yes
fileType	varchar(10)	No	No
fileSize	numeric(16,0)	No	No

Table 3-23 contains cross-reference information between Data Pool science granules and their associated browse granules.

**Table 3-23. DIGranuleBrowseXref**

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	Yes	Yes
browseId	ID	Yes	Yes

Table 3-24 contains information about science files in the Data Pool.

**Table 3-24. DIFile**

Column Name	Data Type	PK Column	Mandatory Column
directoryPath	varchar(255)	Yes	Yes
fileName	varchar(255)	Yes	Yes
granuleId	ID	No	Yes
fileType	varchar(10)	No	No
fileSize	numeric(16,0)	No	No
origChksum	varchar(128)	No	No
compFileSize	numeric(16,0)	No	No
compAlgorithmLabel	char(10)	No	No
compChksum	varchar(128)	No	No
uncompChksum	varchar(128)	No	No
compTimeInSec	int	No	No
uncompChksumTypeid	tinyint	No	No
ChecksumOriginID	tinyint	No	No
ChecksumLastVerified	datetime	No	No
ChecksumVerificationStatus	char(1)	No	Yes

Table 3-25 contains spatial information about granules whose spatial coverage is LLBOX.

**Table 3-25. DIBoundingRectangle**

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	Yes	Yes
BoundingRectangle	llbox	No	Yes
collectionId	ID	No	Yes

Table 3-26 contains spatial information about granules whose spatial coverage is a gpolygon.

**Table 3-26. DIGPolygon**

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	Yes	Yes
GPolygonContainer	gpolygon	No	Yes
collectionId	ID	No	Yes

Table 3-27 contains spatial information about granules with nominal orbital spatial coverage.

**Table 3-27. DIOrbitCalculatedSpatial**

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	Yes	Yes
PathNo	smallint	Yes	Yes
StartBlock	smallint	Yes	Yes
EndBlock	smallint	No	Yes
platInstrCode	tinyint	Yes	Yes
misrCameraId	varchar(20)	No	No
misrOrbitNumber	int	No	No
misrProductVersion	int	No	No
collectionId	ID	No	Yes

Table 3-28 contains a series of orbit polygons for a platform and instrument combination. The data in this table is static and applies only to MISR data.

**Table 3-28. DIOrbitPolygons**

Column Name	Data Type	PK Column	Mandatory Column
platInstrCode	tinyint	Yes	Yes
PathNo	smallint	Yes	Yes
SequenceNo	smallint	Yes	Yes
Orbit	polygon	No	Yes

Table 3-29 contains static look up information regarding the platform and instrument names for a given platInstrCode.

**Table 3-29. DIPlatInstrCode**

Column Name	Data Type	PK Column	Mandatory Column
platInstrCode	tinyint	Yes	Yes
platformShortName	varchar(20)	No	Yes
instrumentName	varchar(80)	No	Yes

Table 3-30 contains parameter names and values for all Data Pool configuration parameters which are configurable through the Data Pool Maintenance GUI.

**Table 3-30. DIConfig**

Column Name	Data Type	PK Column	Mandatory Column
parameterName	varchar(50)	Yes	Yes
parameterDescription	varchar(255)	No	No
parameterType	char(1)	No	Yes
intValue	int	No	No
charValue	varchar(255)	No	No
floatValue	float	No	No

Table 3-31 is used by the Data Pool Cleanup Utility as temporary storage for all granules which get deleted from the Data Pool inventory through a Data Pool clean up session.

**Table 3-31. DIFilesToBeDeleted**

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	No	No
browseId	ID	No	No
fileName	varchar(255)	No	Yes
fileSize	numeric(16,0)	No	Yes
directoryPath	varchar(255)	No	No
state	tinyint	No	Yes
ecsId	ID	No	No
ShortName	char(8)	No	No
VersionId	tinyint	No	No

Table 3-32 is used by the Data Pool Cleanup Utility for the temporary storage of granuleIds that are passed in through the -file parameter.

**Table 3-32. DITempGrans**

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	Yes	Yes

Table 3-33 is used as temporary work space to store the names of phantom files. It will be populated from a flat file using the Sybase Bulk Copy Utility.

**Table 3-33. DITempPhantoms**

Column Name	Data Type	PK Column	Mandatory Column
directoryPath	varchar(255)	No	Yes
fileName	varchar(255)	No	Yes

Table 3-34 contains the static configuration attributes read by the Data Pool stored procedures.

**Table 3-34. DIProcAttributes**

Column Name	Data Type	PK Column	Mandatory Column
procName	varchar(30)	Yes	Yes
attributeName	varchar(30)	Yes	Yes
charValue	varchar(255)	No	No
intValue	int	No	No
floatValue	float	No	No

Table 3-35 contains Data Pool insert actions that have been queued up by the Spatial Subscription Server or by the Batch Insert Utility.

**Table 3-35. DIInsertActionQueue**

Column Name	Data Type	PK Column	Mandatory Column
insQueueId	ID	Yes	Yes
ecslId	ID	No	No
ShortName	char(8)	No	No
VersionId	tinyint	No	No
subId	int	No	No
retentionPriority	int	No	No
retentionPeriod	int	No	No
metadataOnlyFlag	char(1)	No	No
enqueueTime	datetime	No	Yes
completionTime	datetime	No	No
retryCount	int	No	No
status	varchar(20)	No	No
statusDetail	varchar(255)	No	No
inCacheFlag	char(1)	No	Yes
actionSource	char(2)	No	No
dispatchPriority	smallint	No	No
xmlFileName	varchar(255)	No	No
themId	ID	No	No
batchLabel	varchar(16)	No	No
archiveHost	varchar(60)	No	No
tapeLabel	varchar(60)	No	No
requestId	varchar(10)	No	No
requestSuspendFlag	char(1)	No	No
processState	char(1)	No	No

Table 3-36 contains information on all the current active Data Pool insert processes.

**Table 3-36. DIActiveInsertProcesses**

Column Name	Data Type	PK Column	Mandatory Column
granIdentifier	varchar(255)	Yes	Yes
processId	int	No	No
parentPid	int	No	No
xmlFileName	varchar(255)	No	No
ecsId	ID	No	No
ShortName	char(8)	No	Yes
VersionId	tinyint	No	Yes
retentionPriority	int	No	No
retentionPeriod	int	No	No
metadataOnlyFlag	char(1)	No	No
startTime	datetime	No	No
lastStatusChangeTime	datetime	No	No
status	varchar(50)	No	No
inCacheFlag	char(1)	No	No
retryCount	int	No	No
pad1	char(255)	No	Yes
pad2	char(255)	No	Yes
pad3	char(255)	No	Yes
pad4	char(255)	No	Yes

Table 3-37 is a temporary table used by the Data Pool Access Statistic Utility. It contains entries for each Data Pool file access which appears in the FTP log.

**Table 3-37. DIFtpAccessLog**

Column Name	Data Type	PK Column	Mandatory Column
directoryPath	varchar(255)	No	Yes
fileName	varchar(255)	No	Yes
accessTime	datetime	No	Yes
fileSize	numeric(16,0)	No	Yes
transferTime	int	No	No
specialActionFlag	char(2)	No	No
ipAddress	char(15)	No	Yes
domainName	varchar(255)	No	No

Table 3-38 is a temporary table used by the Data Pool Access Statistic Utility. It contains entries for each Data Pool file (metadata, browse) access which appears in the web log.

**Table 3-38. DIWebAccessLog**

Column Name	Data Type	PK Column	Mandatory Column
directoryPath	varchar(255)	No	Yes
fileName	varchar(255)	No	Yes
accessTime	datetime	No	Yes
ipAddress	char(15)	No	Yes
domainName	varchar(255)	No	No

Table 3-39 contains an entry for each Data Pool access statistic rollup.

**Table 3-39. DIAccessRollup**

Column Name	Data Type	PK Column	Mandatory Column
rollupBeginningDateTime	datetime	Yes	Yes
rollupEndingDateTime	datetime	Yes	Yes
accessType	varchar(10)	Yes	Yes

Table 3-40 contains information used for running Data Pool access statistic reports.

**Table 3-40. DIGranuleAccess**

Column Name	Data Type	PK Column	Mandatory Column
dbId	ID	No	Yes
accessType	varchar(10)	No	Yes
age	int	No	Yes
ecsId	ID	No	No
fileSize	numeric(16,0)	No	Yes
fileType	varchar(10)	No	No
fileName	varchar(255)	No	No
accessTime	datetime	No	Yes
transferTime	int	No	No
specialActionFlag	char(2)	No	No
ipAddress	char(15)	No	Yes
domainName	varchar(255)	No	No

Table 3-41 is a static table used for web drill down. It contains information about all possible Data Pool collection groups and collections to which a Data Pool granule might belong.

**Table 3-41. DIDimensionGroupESDT**

Column Name	Data Type	PK Column	Mandatory Column
groupESDTKey	Int	Yes	Yes
groupESDTType	char(1)	No	Yes
groupESDTValue	varchar(12)	No	Yes
groupESDTDescription	varchar(255)	No	No
groupKey	Int	No	No

Table 3-42 is a static table used for web drill down. It contains information about all possible values of DayNightFlag for Data Pool granules might belong.

**Table 3-42. DIDimensionDayNight**

Column Name	Data Type	PK Column	Mandatory Column
dayNightKey	smallint	Yes	Yes
dayNightValue	char(1)	No	Yes
dayNightDescription	varchar(20)	No	No

Table 3-43 is a static table used for web drill down. It contains a row for each time of day bin to which a Data Pool granule might belong.

**Table 3-43. DIDimensionTimeOfDay**

Column Name	Data Type	PK Column	Mandatory Column
timeOfDayKey	smallint	Yes	Yes
timeOfDayType	char(1)	No	Yes
timeOfDayBeginTime	smallint	No	Yes
timeOfDayEndTime	smallint	No	Yes
todHourKey	smallint	No	No
todFourHourKey	smallint	No	No
todHalfDayKey	smallint	No	No

Table 3-44 is a static table used for web drill down. It contains information about all known measured parameters.

**Table 3-44. DIDimensionMP**

Column Name	Data Type	PK Column	Mandatory Column
qaKey	int	Yes	Yes
qaValue	varchar(40)	No	No
qaDescription	varchar(255)	No	Yes

Table 3-45 is a static table used for web drill down. It contains information about all known science QA flag values which could be present in a Data Pool granule.

**Table 3-45. DIDimensionScienceQA**

Column Name	Data Type	PK Column	Mandatory Column
qaCode	Tinyint	Yes	Yes
qaValue	varchar(40)	No	Yes
qaDescription	varchar(255)	No	Yes

Table 3-46 is a table used for web drill down. It contains unique key to indicate the combination of measured parameter and a valid science QA value.

**Table 3-46. DIDimensionMPScienceQAXref**

Column Name	Data Type	PK Column	Mandatory Column
qaKey	int	Yes	Yes
qaCode	tinyint	No	Yes
qaNameKey	int	No	Yes

Table 3-47 is a static table used for web drill down. It contains a row for each possible temporal bin (day, week, month, and year) to which a Data Pool granule might belong. NOTE: For purposes of this table, weeks are not defined as Sunday – Saturday groups of 7 days, but are instead defined as subsets of 7 day weeks wholly contained within a calendar month. For example, if a Sunday – Saturday week is July 29 – August 4, this table will store July 29-31 as one week, and August 1-4 as a different week.

**Table 3-47. DIDimensionTemporal**

Column Name	Data Type	PK Column	Mandatory Column
temporalKey	int	Yes	Yes
temporalType	char(1)	No	Yes
temporalBeginDate	datetime	No	Yes
temporalEndDate	datetime	No	Yes
weekKey	int	No	No
monthKey	int	No	No
yearKey	int	No	No

Table 3-48 is a static table used for web drill down. It contains a row for each possible spatial bin to which a Data Pool granule might belong.

**Table 3-48. DIDimensionSpatialT6All**

Column Name	Data Type	PK Column	Mandatory Column
spatialKey	int	Yes	Yes
gridLevel	tinyint	No	Yes
tile	int	No	Yes
BR_Degree	gpolygon	No	Yes

Table 3-49 is a static table used for populating the DIESDTCurrentDensityMap table for orbit data. It contains spatial keys for each polygon with specific path and instrument.

**Table 3-49. DIDimensionPolygonXref**

Column Name	Data Type	PK Column	Mandatory Column
spatialKey	int	Yes	Yes
platInstrCode	tinyint	Yes	Yes
PathNo	smallint	Yes	Yes
SequenceNo	smallint	Yes	Yes
gridLevel	tinyint	No	No

Table 3-50 stores the relation between granules and the group/ESDT search domain, defined in DIDimensionGroupESDT.

**Table 3-50. DIFactGroupESDT**

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	Yes	Yes
groupESDTKey	int	Yes	Yes

Table 3-51 stores the relation between granules and the DayNight search domain, defined in DIDimensionDayNight.

**Table 3-51. DIFactDayNight**

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	Yes	Yes
dayNightKey	smallint	Yes	Yes

Table 3-52 stores the relation between granules and the TimeOfDay search domain, defined in DIDimensionTimeOfDay.

**Table 3-52. DIFactTimeOfDay**

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	Yes	Yes
timeOfDayKey	smallint	Yes	Yes

Table 3-53 stores the relation between granules and the QA search domain, defined in DIDimensionMPScienceQAXref.

**Table 3-53. DIFactQA**

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	Yes	Yes
qaKey	int	Yes	Yes

Table 3-54 stores the relation between granules and the temporal search domain, defined in DIDimensionTemporal.

**Table 3-54. DIFactTemporalRange**

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	Yes	Yes
collectionId	ID	No	Yes
minDayKey	int	No	Yes
maxDayKey	int	No	Yes
minWeekKey	int	No	Yes
maxWeekKey	int	No	Yes
minMnthKey	int	No	Yes
maxMnthKey	int	No	Yes
minYearKey	int	No	Yes
maxYearKey	int	No	Yes
sizeMB	float	No	No

Table 3-55 contains the next available system generated unique identifier. There is a separate row in this table to generate identifiers for the DICollections, DIGranules, DIThemes, and DIBrowse tables.

Each row in this table is padded out to the 2K page size to minimize locking contention on a per row basis.

**Table 3-55. DIIdentifier**

Column Name	Data Type	PK Column	Mandatory Column
identifierType	char(30)	Yes	Yes
identifierObjectType	char(30)	Yes	Yes
lastIdentifier	ID	No	Yes
lastIntIdentifier	int	No	Yes
lastSmallIntIdentifier	smallint	No	Yes
identifierPad1	char(255)	No	Yes
identifierPad2	char(255)	No	Yes
identifierPad3	char(255)	No	Yes
identifierPad4	char(255)	No	Yes
identifierPad5	char(255)	No	Yes
identifierPad6	char(255)	No	Yes
identifierPad7	char(255)	No	Yes

Table 3-56 is temp permanent table, which will get the data from a flat file using the Sybase Bulk Copy Utility for the Update Granule Expiration utility.

**Table 3-56. DIUpdGranulesTemp**

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	No	Yes
ExpirationDate	datetime	No	Yes
RetentionPriority	int	No	No

Table 3-57 holds Non-ECS granule data for the Batch Insert utility.

**Table 3-57. DIXMLFilesToInsert**

Column Name	Data Type	PK Column	Mandatory Column
processId	int	Yes	Yes
xmlFileName	varchar(255)	Yes	Yes
ShortName	char(8)	No	No
VersionId	tinyint	No	No

Table 3-58 holds the granules from the tape archive referenced by the Batch Insert utility.

**Table 3-58. DIECSIdsToInsert**

Column Name	Data Type	PK Column	Mandatory Column
processId	int	Yes	Yes
ecsId	ID	Yes	Yes

Table 3-59 holds all collections that allow HEG conversion.

**Table 3-59. DIHEGLookup**

Column Name	Data Type	PK Column	Mandatory Column
ShortName	char(8)	Yes	Yes
VersionId	tinyint	Yes	Yes

Table 3-60 contains order information for HEG conversion orders that initiated through the Data Pool Web Access GUI.

**Table 3-60. DICartOrder**

Column Name	Data Type	PK Column	Mandatory Column
orderId	ID	Yes	Yes
email	varchar(255)	No	Yes
realName	varchar(255)	No	No
status	varchar(10)	No	No
timestamp	datetime	No	No
notes	varchar(255)	No	No
insertDate	datetime	No	No
archiveFlag	char(1)	No	Yes

Table 3-61 contains order item information for HEG conversion orders that initiated through the Data Pool Web Access GUI.

**Table 3-61. DICartOrderItem**

Column Name	Data Type	PK Column	Mandatory Column
itemId	ID	Yes	Yes
orderId	ID	No	Yes
inputFile	varchar(255)	No	Yes
outputProj	varchar(10)	No	No
outputFmt	varchar(10)	No	No
ul_lat	float	No	No
ul_lon	float	No	No
lr_lat	float	No	No
lr_lon	float	No	No
status	varchar(10)	No	No
errorCode	int	No	No
granuleId	ID	No	No
projParamStr	varchar(255)	No	No
subsetFlag	char(1)	No	Yes
compAlgorithmLabel	char(10)	No	No

Table 3-62 is a temporary table to hold QA flags to be updated and their values.

**Table 3-62. DIQAUpdFlagTemp**

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	No	Yes
ParameterName	varchar(40)	No	Yes
xmlUpdateFlag	char(1)	No	No
qaFlagType	varchar(11)	No	No
qaValue	varchar(25)	No	No
qaExpIValue	varchar(255)	No	No

Table 3-63 contains information about the various parameters and its values to be used in Data Pool Cleanup Utility.

**Table 3-63. DIRecoveryParameters**

Column Name	Data Type	PK Column	Mandatory Column
utilityName	varchar(40)	Yes	Yes
parameterName	varchar(50)	Yes	Yes
parameterValue	varchar(255)	No	Yes

Table 3-64 will first load this table using Sybase Bulk Copy Utility for the final population of DIQAUpdFlagTemp table.

**Table 3-64. DIQAUpdTempBcp**

Column Name	Data Type	PK Column	Mandatory Column
ecsId	ID	No	Yes
ParameterName	varchar(40)	No	Yes
xmlUpdateFlag	char(1)	No	No
qaFlagType	varchar(11)	No	No
qaValue	varchar(25)	No	No
qaExpIValue	varchar(255)	No	No

Table 3-65 contains the file system information for Data Pool staging area.

**Table 3-65. DIFileSystems**

Column Name	Data Type	PK Column	Mandatory Column
fileSystemLabel	varchar(10)	Yes	Yes
absoluteFilePath	varchar(255)	No	Yes
filePath	varchar(255)	No	No
freeSpaceMB	int	No	Yes
availabilityFlag	char(1)	No	Yes
availabilityFlagLastUpdate	datetime	No	No
freeSpaceFlag	char(1)	No	Yes
freeSpaceFlagLastUpdate	datetime	No	No
insertTime	datetime	No	Yes
insertStatus	varchar(30)	No	No
ingestStatus	varchar(30)	No	No
lastUpdate	datetime	No	No
fileSystemID	numeric(9)	No	Yes
consumedSpace	tinyint	No	No
freeSpaceChecked	datetime	No	No
freeSpaceGB	int	No	Yes

Table 3-66 contains all the compression algorithms that are used by DataPool.

**Table 3-66. DICompressionAlgorithms**

Column Name	Data Type	PK Column	Mandatory Column
compAlgorithmLabel	char(10)	Yes	Yes
compCmd	varchar(255)	No	Yes
decompCmd	varchar(255)	No	No
defaultFileExtension	char(10)	No	No
activeFlag	char(1)	No	Yes
lastUpdate	datetime	No	No
insertTime	datetime	No	Yes

Table 3-67 contains all the cloud cover source that used by DataPool.

**Table 3-67. DICloudCoverSource**

Column Name	Data Type	PK Column	Mandatory Column
cloudSourceId	ID	Yes	Yes
sourceName	varchar(40)	No	Yes
sourceDescription	varchar(255)	No	No
sourceType	char(1)	No	Yes

Table 3-68 contains the cloud cover percentage for a granule

**Table 3-68. DIGrCloudCover**

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	Yes	Yes
cloudCover	int	No	Yes

Table 3-69 contains the list of spatial keys for a granule in HEX format.

**Table 3-69. DIGranuleTiles**

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	Yes	Yes
collectionId	ID	No	Yes
insertTime	datetime	No	Yes
tiles	varbinary(800)	No	Yes
gridLevel	tinyint	No	Yes

Table 3-70 contains the HEX representation of a density map for a collection.

**Table 3-70. DIESDTCurrentDensityMap**

Column Name	Data Type	PK Column	Mandatory Column
collectionId	ID	Yes	Yes
lastUpdate	datetime	No	No
densityMap	image	No	Yes
lastUpdatedUtility	char(1)	No	Yes

Table 3-71 contains all the granules that are come from OMS requests. It uses between the OMS and the cleanup utility to figure out who owns the row.

**Table 3-71. DIOMSGranules**

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	No	No
ecsId	ID	Yes	Yes
granuleType	char(2)	No	No
owner	char(1)	No	Yes
lockId	varchar(255)	No	No
lastUpdate	datetime	No	No

Table 3-72 contains the band information for an order item.

**Table 3-72. DICartOrderItemBand**

Column Name	Data Type	PK Column	Mandatory Column
itemId	ID	No	Yes
objectId	ID	No	Yes
bandId	ID	No	No
bandValue	int	No	No
dimId	ID	No	No
dimValue	int	No	No

Table 3-73 contains the HDF object information.

**Table 3-73. DIHdfObjects**

Column Name	Data Type	PK Column	Mandatory Column
objectId	ID	Yes	Yes
objectName	varchar(255)	No	Yes
objectType	varchar(60)	No	Yes

Table 3-74 contains the HDF band information.

**Table 3-74. DIHdfBands**

Column Name	Data Type	PK Column	Mandatory Column
bandId	ID	Yes	Yes
fieldName	varchar(255)	No	Yes
bandName	varchar(255)	No	Yes
bandSize	int	No	Yes

Table 3-75 contains the HDF field information.

**Table 3-75. DIHdfFields**

Column Name	Data Type	PK Column	Mandatory Column
fieldId	ID	Yes	Yes
fieldName	varchar(255)	No	Yes

Table 3-76 contains the 4<sup>th</sup> dimension information of a HDF object.

**Table 3-76. DIHdf4thDimensions**

Column Name	Data Type	PK Column	Mandatory Column
dimId	ID	Yes	Yes
dimName	varchar(255)	No	Yes
dimSize	int	No	Yes

Table 3-77 contains the band subset information for a granule.

**Table 3-77. DIGranuleHdfObjectsXref**

Column Name	Data Type	PK Column	Mandatory Column
granuleId	ID	No	Yes
objectId	ID	No	Yes
bandId	ID	No	No
dimId	ID	No	No
fieldId	ID	No	No

Table 3-78 holds all collections that are NOSE data type. This table uses to fill out the gridLevel for NOSE collections in DICollections.

**Table 3-78. DINOSELookup**

Column Name	Data Type	PK Column	Mandatory Column
ShortName	char(8)	Yes	Yes
VersionId	tinyint	Yes	Yes
platformShortName	varchar(20)	No	Yes
instrumentName	varchar(80)	No	Yes

Table 3-79 contains all groupESDT Key space and the total number of granules that the group or ESDT contains.

**Table 3-79. DStatGroupESDT**

Column Name	Data Type	PK Column	Mandatory Column
groupESDTKey	int	No	Yes
number	int	No	Yes

Table 3-80 contains all groupESDT Key space and the total number of granules that the ESDT contains.

**Table 3-80. DStatESDT**

Column Name	Data Type	PK Column	Mandatory Column
groupESDTKey	int	No	Yes
groupESDTType	char(1)	No	Yes
number	int	No	Yes
size	float	No	Yes

Table 3-81 contains a list of themes and the total number of granules that each theme contains.

**Table 3-81. DStatTheme**

Column Name	Data Type	PK Column	Mandatory Column
themeld	ID	No	Yes
number	int	No	Yes

Table 3-82 stores the global aging policy used to describe how the dispatch priority of a granule changes over time.

**Table 3-82. DIAgingConfig**

Column Name	Data Type	PK Column	Mandatory Column
AgingConfigId	identity	Yes	Yes
MaxPriLevel	float	No	No
agingStep	float	No	No
ECSPriority	char(15)	No	No
IntPriority	tinyint	No	No

Table 3-83 stores all HEG options relate to format, projections, and subsetting.

**Table 3-83. DIHEGOptions**

Column Name	Data Type	PK Column	Mandatory Column
optionId	int	Yes	Yes
optionType	varchar(20)	No	Yes
optionName	varchar(80)	No	Yes

Table 3-84 stores the label name for each HEG options.

**Table 3-84. DIHEGOptionLabel**

Column Name	Data Type	PK Column	Mandatory Column
optionId	int	Yes	Yes
labelName	varchar(80)	No	Yes

Table 3-85 stores the available static HEG options for each ESDT.

**Table 3-85. DIHEGOptionCollXref**

Column Name	Data Type	PK Column	Mandatory Column
collectionId	ID	Yes	Yes
optionId	int	Yes	Yes
required	char(1)	No	Yes

Table 3-86 stores a list of HEG exceptions base on the specific option.

**Table 3-86. DIHEGExceptions**

Column Name	Data Type	PK Column	Mandatory Column
exceptionId	int	Yes	Yes
formatId	int	No	No
projectionId	int	No	No
subsetId	int	No	No
resamplingId	int	No	No
subsamplingId	int	No	No
stitchingId	int	No	No
resolutionId	int	No	No
exceptionType	char(1)	No	No
message	varchar(255)	No	No

Table 3-87 stores the available exception for HEG options for each ESDT.

**Table 3-87. DIHEGExceptionCollXref**

Column Name	Data Type	PK Column	Mandatory Column
collectionId	ID	Yes	Yes
exceptionId	int	Yes	Yes

Table 3-88 contains granules that are registered with OGC Web Services, OWS.

**Table 3-88. DIGranuleOWS**

Column Name	Data Type	PK Column	Mandatory Column
geoid	varchar(30)	Yes	Yes
granuleId	ID	No	Yes
serviceRequested	char(1)	No	Yes
processingState	varchar(10)	No	No
lastUpdate	datetime	No	No

Table 3-89 contains granules that have been deleted from the Data Pool database but are still registered with OGC Web Services, OWS.

**Table 3-89. DIOWSDeletedGranules**

Column Name	Data Type	PK Column	Mandatory Column
geoid	varchar(30)	Yes	Yes
expirationDate	datetime	No	Yes
serviceRequested	char(1)	No	Yes

Table 3-90 contains information about alerts that have been raised for resources such as file systems, service hosts, and archives.

**Table 3-90. DIAdAlert**

Column Name	Data Type	PK Column	Mandatory Column
ResourceID	varchar(64)	Yes	Yes
RaiseTime	datetime	Yes	Yes
ClearTime	datetime	No	No
RaiseReason	varchar(255)	No	Yes
ClearReason	varchar(255)	No	No

Table 3-91 contains granules that have been deleted from the Data Pool database but are still registered with OGC Web Services, OWS.

**Table 3-91. DIAdMessages**

Column Name	Data Type	PK Column	Mandatory Column
MessageID	numeric(7)	Yes	Yes
MessageName	varchar(30)	No	Yes
Arg1	varchar(255)	No	No
Arg2	varchar(255)	No	No
Arg3	varchar(255)	No	No
SubmitTime	datetime	No	Yes
CompletionTime	datetime	No	No
CompletionMessage	varchar(255)	No	No

Table 3-92 contains information of a list of Bulk URL ids.

**Table 3-92. *DIBulkWrkTable***

Column Name	Data Type	PK Column	Mandatory Column
clientId	ID	No	Yes
granuleId	ID	No	Yes

Table 3-93 contains granules that have been deleted from the Data Pool database but are still registered with OGC Web Services, OWS.

**Table 3-93. *DIPrivateCollection***

Column Name	Data Type	PK Column	Mandatory Column
ShortName	char(8)	Yes	Yes
VersionId	tinyint	Yes	Yes

### 3.1.3 Columns

Brief definitions of each of the columns present in the database tables defined above are contained in Table 3-94.

**Table 3-94. Column Descriptions (1 of 32)**

Column Name	Table	Column Description	Valid Values
absoluteFileSystemPath	DIFileSystems	The absolute path includes the FTP root path and the file system path.	
accessTime	DIGranuleAccess DIFtpAccessLog DIWebAccessLog	The time at which the file was accessed through FTP or Web	
accessType	DIGranuleaccess DIAccessRollup	The type of access log for this process.	FTP – any ftp access http – any web access
actionSource	DIInsertActionQueue	Indicates the process that inserted the row into the table. Note that batchLabel may also be needed to determine the source precisely.	B – Batch Insert S – Subscription O – OMS request N – NDPIU I – Ingest R - Registration
activeFlag	DICompressionAlgorithms	Flag indicates whether the compression algorithm is active.	Y – compression algorithm active (default) N – compression algorithm is not active
age	DIGranuleAccess	The difference between the time at which the file was accessed through FTP or Web and the time at which the file was inserted into Data Pool	
AgingConfigId	DIAGingConfig	Unique identifier for a aging policy	
agingStep	DIAGingConfig	Number of steps to promote the request for the aging policy.	
archiveFlag	DIOrder	Flag used to determine whether delete was performed on the order	Y – Delete was performed on the order N – Delete was not performed on the order (default)
archiveHost	DIInsertActionQueue	Indicate which archive host to use for copying the file into Data Pool.	
archiveNeeded	DIGranules, DIBrowse	Indicates whether the granule should also be placed in the archive.	Y – archive required
archiveTimeStamp	DIGranules, DIBrowse	The time when archiving occurred.	

**Table 3-94. Column Descriptions (2 of 32)**

Column Name	Table	Column Description	Valid Values
Arg1	DIAdMessages	This column provides storage for an optional message argument. If the message requires no arguments, this column may be null.	
Arg2	DIAdMessages	This column provides more storage for an optional message argument. If Arg1 is null, this must also be null	
Arg3	DIAdMessages	This column provides more storage for an optional message argument. If Arg2 is null, this must also be null	
attributeName	DIProcAttributes	The name of the attribute which is use to look up its value.	
AutomaticQualityFlag	DIMeasuredParameter	Automatic Quality value for the granule	
AutomaticQualityFlag Explan	DIMeasuredParameter	Explanation for how to figure out the automatic quality value.	
availabilityFlag	DIFileSystems	Flag indicates whether the file system is available	Y – file system available (default) N – file system is unavailable
availabilityFlagLastU pdate	DIFileSystems	The last time that the availability flag updated.	
bandId	DIHdfBands DICartOrderItemBand DIGranuleHdfObjectsXref	Unique identifier for the 3 <sup>rd</sup> dimension in a field in a HDF-EOS object	
bandName	DIHdfBands	Name of the 3 <sup>rd</sup> dimension in a field	
bandSize	DIHdfBands	Size of 3 <sup>rd</sup> dimension in the field	
bandValue	DICartOrderItemBand	The value for the 3 <sup>rd</sup> dimension in a HDF-EOS object	

**Table 3-94. Column Descriptions (3 of 32)**

Column Name	Table	Column Description	Valid Values
batchLabel	DIInsertActionQueue	Batch label that is associated with a batch insert.	For online archive migration, the batchLabel will be 'Migration'.
BoundingBoxRectangle	DIBoundingBoxRectangle	A SQS type llbox representation of the spatial area for the granule.	
BR_Degree	DI DimensionSpatialT6All	The value of the geographical location	
BrowseDescription	DIBrowse	Description of the browse granule	
browseId	DIBrowse DIBrowseFile DIGranuleBrowseXref DIFilesToBeDeleted DIBatchBrowseToDelete	The unique ID which identifies the browse granule	
bulkExportedFlag	DI Collections	Flag used to determine whether the collection allows for exporting metadata by the ECHO Access to Data Pool utility.	Y – export to ECHO (default) N – do not export to ECHO
charValue	DIConfig DIProcAttributes	The value of the parameter which has data type of character.	
checksum	DIRestoreOlaFilesFromTape, DIRestoreTapeFilesFromOla	The checksum value.	
checksumType	DIRestoreOlaFilesFromTape, DIRestoreTapeFilesFromOla	Which type of checksum was performed.	
ChecksumLastVerified	DIFile	The date and time the checksum was last verified.	
ChecksumOriginID	DIFile	Identifier for the origin.	
ChecksumVerificationStatus	DIFile	Status of the checksum verification.	
ClearReason	DIAdAlert	Text message giving the reason for clearing the alert, null if ClearTime is null.	
ClearTime	DIAdAlert	Clear time for the alert, not cleared if null.	

**Table 3-94. Column Descriptions (4 of 32)**

Column Name	Table	Column Description	Valid Values
clientId	DIBulkWrkTable	Bulk URL client ID	
cloudCover	DIGrCloudCover	The percentage for cloud cover.	
cloudSourceId	DICollections DICloudCoverSource	ID uses to indicate which cloud cover source that the collection uses.	
CollectionDescription	DICollections	Description of ECS collection	
collectionId	DICollections DIGranules DIGranuleTiles DIESDTCurrentDensityMap DIFactTemporalRange DIHEGOptionCollXref DIHEGExceptionCollXref DIBmgtEvents DIBoundingRectangle DIGPolygon DIGranuleThemeXref DIOrbitCalculatedSpatial	Identifier for each collection	
CollGrpDescription	DICollectionGroup	Description of an ECS collection group	
commandLine	DIRestoreRequest	Command line parameters for the request.	
compAlgorithmLabel	DICompressionAlgorithms DICollections DICartOrderItem DIFile	Label uses to indicate which compression algorithm to use.	
compChksum	DIFile	Checksum computed for compressed file	
compCmd	DICompressionAlgorithms	The command for a compression algorithm with full path.	
compFileSize	DIFile	The size of the compressed file.	
CompletionMessage	DIAdMessages	Text messages for the server message was processed.	
CompletionTime	DIAdMessages	The time at which the server message was processed.	

**Table 3-94. Column Descriptions (5 of 32)**

<b>Column Name</b>	<b>Table</b>	<b>Column Description</b>	<b>Valid Values</b>
completionTime	DIInsertActionQueue	The time that the action was completed. It contains the value NULL until the action status is either DONE or FAILED.	
compTimeInSec	DIFile	Time in seconds it took to compress the file	
consumedSpace	DIFileSystems	Percentage of a file system that is in use.	
convertEnabledFlag	DICollections	Flag use to determine whether the collection is allowed for HEG conversion.	Y – allow HEG conversion N – do not allow HEG conversion (default)
cycleId	DIBmgtEvents	Identifier for the current processing cycle	
dayNight	DICollections	Flag uses to indicate whether the collection has day night coverage.	Y – has dayNight coverage (default) N – does not have dayNight coverage
dayNightDescription	DI DimensionDayNight	Description for each dayNighValue	
DayNightFlag	DIGanules	Flag indicating whether the granule was acquired during the day, the night, or both	
dayNightKey	DI DimensionDayNight DI FactDayNight	Uniquely Identifies a condition of the day when the granule acquisition occurred.	
dayNightValue	DI DimensionDayNight	The value represented by the key.	D – Day N – Night B – Both X – Not Compatible
dbId	DIGranuleSubscription DIGranuleAccess DIRestoreOlaFilesFromTape, DIRestoreTapeFilesFromOla	The unique ID which identifies the granule.	
decompCmd	DICompressionAlgorithms	The associated decompress command for the compression algorithm with full path.	

**Table 3-94. Column Descriptions (6 of 32)**

Column Name	Table	Column Description	Valid Values
defaultFileExtension	DICompressionAlgorithms	The default file extension uses for the compressed file after the granule file compressed.	
densityMap	DIESDTCurrentDensityMap	The HEX representation of the density map	
dimId	DIHdf4thDimensions DICartOrderItemBand DIGranuleHdfObjectsXref	Unique identifier for the 4 <sup>th</sup> dimension in a field in a HDF-EOS object.	
dimName	DIHdf4thDimensions	Name of the 4 <sup>th</sup> dimension in the field	
dimSize	DIHdf4thDimensions	Size of the 4 <sup>th</sup> dimension in the field	
dimValue	DICartOrderItemBand	The value for the 4 <sup>th</sup> dimension in a HDF-EOS object.	
directoryPath	DIFile DIBrowseFile DIFilesToBeDeleted DIFtpAccessLog DIWebAccessLog DITempPhantoms	Path Name of the browse granule files relative to the Data Pool root directory.	
dispatchPriority	DIInsertActionQueue	Dispatch priority for a granule in the queue.	
displayName	DICollectionGroup	Group name uses to display on Web Drill Down page.	
domainName	DIFtpAccessLog DIWebAccessLog DIGranuleAccess	Domain name of the client	
dplDirectoryPath	DIRestoreOlaFilesFromTape, DIRestoreTapeFilesFromOla	Name of the directory path in the DataPool.	
dplFileName	DIRestoreOlaFilesFromTape, DIRestoreTapeFilesFromOla	Name of the file in the DataPool.	
dplId	DIRestoreOlaFilesFromTape, DIRestoreTapeFilesFromOla	Identifier for the granule in the DPL database.	

**Table 3-94. Column Descriptions (7 of 32)**

<b>Column Name</b>	<b>Table</b>	<b>Column Description</b>	<b>Valid Values</b>
ecsDirectoryPath	DIRestoreOlaFilesFromTape, DIRestoreTapeFilesFromOla	Name of the directory path in the Inventory database.	
ecsFileName	DIRestoreOlaFilesFromTape DIRestoreTapeFilesFromOla	Name of the file in the Inventory database.	
EcDbComments	EcDbDatabaseVersions	Notes or comments on the database version level.	
EcDbCurrentVersionFlag	EcDbDatabaseVersions	Flag indicating if this row represents the current database version entry	
EcDbDatabaseName	EcDbDatabaseVersions	The name of the database for which this database version level is applied.	
EcDbDropDescription	EcDbDatabaseVersions	The official name of the ECS software drops for	
EcDbDropInstallDate	EcDbDatabaseVersions	The date and time that the database version level was installed.	
EcDbDropVersion	EcDbDatabaseVersions	The official description of the ECS software drops for this database version level.	
EcDbSchemaVersionId	EcDbDatabaseVersions	The subsystem-specific identifier for this database schema version	
EcDbSybaseServer	EcDbDatabaseVersions	The name of the baseline Sybase SQL server controlling this database.	
EcDbSybaseVersion	EcDbDatabaseVersions	The software release version of the Sybase SQL server in place when this database version level was initially installed.	
EcDbUpdateProcess	EcDbDatabaseVersions	The installation method by which this database version level was installed.	
ecsFlag	DICollectionGroup	Flag used to identify whether the collection group is ECS or non-ECS.	Y – ECS N – Non-ECS

**Table 3-94. Column Descriptions (8 of 32)**

Column Name	Table	Column Description	Valid Values
ecsId	DIActiveInsertProcesses DIGranules DIBrowse DIFilesToBeDeleted DIOMSGranules DIQAUpdTempBcp DIGranuleAccess DIInsertActionQueue DIECSIdsToInsert DIBmgtEvents DIRestoreOlaFilesFromTape, DIRestoreTapeFilesFromOla	The ID that identifies the ECS browse granule. It matches the browse id in AIM database.  The unique ID which identifies the granule. It matches the dbID in the ECS AIM database.	
ecsInsertTime	DIGranules DIBrowse	Time when the granule was inserted into ECS	
ECSPriority	DIAGingConfig	Priority for the ECS request before gets into the DPL	
email	DICartOrder	Email Id	
EndBlock	DIOrbitCalculatedSpatial	The ordinal number of the polygon where granule coverage ends.	
enqueueTime	DIInsertActionQueue	The time at which the action was queued.	
endTime	DIDPCVHistory	Ending time for the checksum utility run.	
errorCode	DICartOrderItem	if FAILED, error code from HEG converter	
eventKey	DIBmgtEvents	Identifies a particular event	
eventTime	DIBmgtEvents	Time of an event	
eventType	DIBmgtEvents	Type of event logged	INSERT, DELETE
exceptionType	DIHEGExceptions	Value to indicate the type of exception, valid values.	"W" – warning, "E" - Error
exclusionSCFlag	DICollections	Flag used to determine whether the collection is allowed to insert Science and Metadata to Data Pool or Metadata only.	Y – Metadata only N – Science and Metadata (default)
ExpirationDate	DIUpdGranulesTemp	Expiration date for a granule.	

**Table 3-94. Column Descriptions (9 of 32)**

Column Name	Table	Column Description	Valid Values
expirationDate	DIGranuleExpirationPriority DIOWSDeletedGranules	Date when the granule expired.	
exceptionId	DIHEGExceptions DIHEGExceptionCollXref	Unique identifier for a HEG exception	
exported	DIBmgtEvents	Flag indicating that information has been exported	Y
externalId	DIGranules DIBrowse	The ID which identifies the Non-ECS granule.	
fieldId	DIHdfFields DIGranuleHdfObjectsXref	Id of the field in the HDF-EOS object	
fieldName	DIHdfBands DIHdfFields	Name of the field in the HDF-EOS object	
fileName	DIFile DIBrowseFile DIFilesToBeDeleted DIFtpAccessLog DIWebAccessLog DITempPhantoms DIGranuleAccess	The file name for a science, metadata or browse file	
fileSize	DIFile DIBrowseFile DIFilesToBeDeleted DIFtpAccessLog DIGranuleAccess DIRestoreOlaFilesFromTape, DIRestoreTapeFilesFromOla	The size of the browse file stored on the Data Pool disk. The size of the file in Data Pool.	
fileSystemID	DIFileSystems	An identifying number for a file system.	
fileSystemLabel	DIFileSystems DICollections	Label uses to indicate which file system the collection belongs to.	
fileSystemPath	DIFileSystems	The file system portion of the absolute path.	
fileType	DIBrowseFile DIFile DIGranuleAccess DIRestoreOlaFilesFromTape, DIRestoreTapeFilesFromOla	The type of file.	BROWSE SCIENCE METADATA BROWSELINK

**Table 3-94. Column Descriptions (10 of 32)**

Column Name	Table	Column Description	Valid Values
finishTime	DIRestoreRequests	Time the restore finished.	
floatValue	DIConfig DIProcAttributes	The value of the parameter which has data type of float.	
formatId	DIHEGExceptions	Identifier for a HEG's format option.	
freeSpaceChecked	DIFileSystems	The last time the free space in the file system was checked.	
freeSpaceFlag	DIFileSystems	Flag indicates whether there's any space available in the file system.	Y – space is available on the file system N – no space is available on the file system
freeSpaceGB	DIFileSystems	The free space in the file system in gigabytes.	
freeSpaceFlagLastUpdate	DIFileSystems	The last time that the free space flag updated.	
freeSpaceMB	DIFileSystems	The amount of space which the Cleanup utility has to clear before resetting the freeSpaceFlag.	
geoid	DIGranuleOWS DIOWSDeletedGranules	The unique identifier of an OWS granule.	Format is "SC:shortName.versionId:dbID"
global	DICollections	Flag uses to indicate whether the collection is a global collection or it contains a very large spatial coverage.	Y – has global coverage N – does not have global coverage (default)
GPolygonContainer	DIGPolygon	A SQS type gpolygon representation of the spatial area for the granule.	
granIdentifier	DIActiveInsertProcesses	Identifier for a insert process.	

**Table 3-94. Column Descriptions (11 of 32)**

Column Name	Table	Column Description	Valid Values
granuleId	DIGranules DIGranuleOWS DIGranuleTiles DIGranuleThemeXref DIGranuleHdfObjectXref DIGranuleBrowseXref DIMeasuredParameter DIGrCloudCover DIBoundingRectangle DIGPolygon DIOrbitCalculatedSpatial DIFactGroupESDT DIFactDayNight DIFactQA DIFactTemporalRange DIFactTimeOfDay DIFile DIFilesToBeDeleted DIUpdGranulesTemp DIQAUpdFlagTemp DITempGrans DICartOrderItem DIOMSGranules DIGranuleExpirationPriority DIBulkWrkTable DIBmgtEvents DIBatchGransToDelete DIBcpGransToDelete	The unique ID which identifies the granule	
GranPublicFlag	DICollections	Indicates whether granules in the collection can be made public.	Y – can be public N – remain hidden
granuleType	DIOMSGranules	The two characters used to identify the type of granule	SC – science granule BR – browse granule
gridLevel	DI Dimension PolygonXref DI Dimension SpatialT6All DI Collections DI Granule Tiles	Spatial grid level used to generate the density map. The default is 6.	Valid values are between 1 and 6 (default = 6)
groupESDTDescription	DI Dimension GroupESDT	The description for the group or ESDT.	

**Table 3-94. Column Descriptions (12 of 32)**

<b>Column Name</b>	<b>Table</b>	<b>Column Description</b>	<b>Valid Values</b>
groupESDTKey	DI DimensionGroupESDT DI FactGroupESDT DI StatESDT DI StatGroupESDT	Uniquely Identifies a group or ESDT	
groupESDTType	DI StatESDT DI DimensionGroupESDT	Identifies the type, either group or ESDT	G – Group E – ESDT
groupESDTValue	DI DimensionGroupESDT	The value for the group or ESDT. If it is an ESDT, its value is a combination of ShortName and VersionId If it is a collection group, its value is the displayName of the group.	
groupId	DI CollectionGroup DI Collections	ECS collection group ID	
groupKey	DI DimensionGroupESDT	If groupESDTType is G, this field contains the value NULL. Otherwise, the field contains the key of the group to which the ESDT belongs.	
HiddenRetTime	DI Collections	The default retention time for hidden granules in this collection.	
hostName	DI DPCVHistory	Name of host where checksum utility was run.	
identifierObjectType	DI Identifier	The name or type of the DPL database object for which the DI Identifier row exists.	
identifierPad1	DI Identifier	One of seven columns of type char(255) used to pad each row in the DI Identifier table to the 2K page size.	
identifierPad2	DI Identifier	One of seven columns of type char(255) used to pad each row in the DI Identifier table to the 2K page size.	
identifierPad3	DI Identifier	One of seven columns of type char(255) used to pad each row in the DI Identifier table to the 2K page size.	

**Table 3-94. Column Descriptions (13 of 32)**

Column Name	Table	Column Description	Valid Values
identifierPad4	DIIIdentifier	One of seven columns of type char(255) used to pad each row in the DIIIdentifier table to the 2K page size.	
identifierPad5	DIIIdentifier	One of seven columns of type char(255) used to pad each row in the DIIIdentifier table to the 2K page size.	
identifierPad6	DIIIdentifier	One of seven columns of type char(255) used to pad each row in the DIIIdentifier table to the 2K page size.	
identifierPad7	DIIIdentifier	One of seven columns of type char(255) used to pad each row in the DIIIdentifier table to the 2K page size.	
identifierType	DIIIdentifier	The data type of the identifier for which the DIIIdentifier row exists.	
inCacheFlag	DIIInsertActionQueue DIActiveInsertProcesses	Indicates if process is handling a granule that must be read off tape or whether the granule is in AMASS cache. Valid values are:	Y – the granule is in cache (default) N – the granule is on tape
ingestStatus	DIFileSystems	Indicates the status of the file system with respect to the ability to ingest new granules.	ACTIVE SUSPENDED SUSPENDED BY OPERATOR
inputFile	DICartOrderItem	File in datapool archive to process	
inputParameter	DIDPCVHistory	Command line parameters used by DPCV utility.	
insertDate	DICartOrder	When order was first inserted	
insertEnabledFlag	DICollections DIThemes	Flag used to determine whether granules from this collection are eligible for publication in the Data Pool.	Y – allow Data Pool insert (default) N – do not allow Data Pool insert

**Table 3-94. Column Descriptions (14 of 32)**

Column Name	Table	Column Description	Valid Values
insertStatus	DIFileSystems	Similar to ingestStatus, but with respect to DPAD rather than DPL Ingest.	ACTIVE SUSPENDED SUSPENDED BY OPERATOR
insertTime	DIGranules DIBrowse DIThemes DICollections DICollectionGroup DIFileSystems DICompressionAlgorithms DIGranuleTiles	The time which the row inserted.	
insQueueId	DIInsertActionQueue	Uniquely identifies the queue entry	
instrumentName	DIPlatInstrCode DINOSELookup	The name of an instrument for the platform.	
IntPriority	DI AgingConfig	Value for each aging step.	
intValue	DIConfig DIProcAttributes	The value of the parameter which has data type of integer.	
ipAddress	DI FtpAccessLog DIWebAccessLog DIGranuleAccess	IP Address of the user	
isOrderOnly	DIGranules DIBrowse DIRestoreOlaFilesFromTape, DIRestoreTapeFilesFromOla	A single-character value indicating whether a granule is public or hidden, on order or not.	Y – order only granule H – hidden granule B – public and on order NULL – public only
itemId	DI CartOrderItem DI CartOrderItemBand	Unique Identifier for an item in the Cart.	
labelName	DIHEGOptionLabel	Label name for the HEG Option that uses to display on the Web Access GUI.	
lastIdentifier	DIIdentifier	The next available uniqueness identifier available of type ID for a specific IdentifierObjectType	

**Table 3-94. Column Descriptions (15 of 32)**

Column Name	Table	Column Description	Valid Values
lastIntIdentifier	DIIdentifier	The next available uniqueness identifier available of type integer for a specific IdentifierObjectType.	
lastSmallIntIdentifier	DIIdentifier	The next available uniqueness identifier available of type smallint for a specific IdentifierObjectType.	
lastStatusChangeTime	DIActiveInsertProcesses	Time current action last changed status.	
lastUpdate	DIGranules DIGranuleOWS DICollections DICollectionGroup DIBrowse DIGranules DICompressionAlgorithms DIESDTCurrentDensityMap DIThemes DIOMSGranules DIDPCVHistory	The time which the row last updated.	
lastUpdatedUtility	DIESDTCurrentDensityMap	The utility that last updated the density map	C – cleanup utility D – density map utility U – unknown
localGranuleId	DIGranules	The string by which the user recognizes this granule.	
lockId	DIOMSGranules	A user string provided by OMS when locking and unlocking a granule to ensure that the granule is locked and unlocked by the same owner.	
logicalLock	DILogicalLock	Used as a mutex for the deletion of granules	
lr_lat	DIOrderItem	Lower right latitude	
lr_lon	DIOrderItem	Lower right longitude	
maxDayKey	DIFactTemporalRange	Maximum temporal key for granule base on temporal range from DIDimensionTemporal with temporal type day.	

**Table 3-94. Column Descriptions (16 of 32)**

Column Name	Table	Column Description	Valid Values
MaxPriLevel	DI AgingConfig	Max Priority Level that the request promoted for the aging policy	
maxMnthKey	DI FactTemporalRange	Maximum temporal key for granule base on temporal range from DIDimensionTemporal with temporal type month.	
maxWeekKey	DI FactTemporalRange	Maximum temporal key for granule base on temporal range from DIDimensionTemporal with temporal type week.	
maxYearKey	DI FactTemporalRange	Maximum temporal key for granule base on temporal range from DIDimensionTemporal with temporal type year.	
mediald	DI RestoreOlaFilesFromTape, DI RestoreTapeFilesFromOla	Identifies the tape where the file is stored.	
message	DI HEGExceptions	Warning or Error message for the exception	
MessageID	DI AdMessages	Surrogate key	
MessageName	DI AdMessages	This gives the name of the message, and is used by the DPAD server to determine what action must be performed.	
metadataOnlyFlag	DI InsertActionQueue DI ActiveInsertProcesses	The flag indicates whether the action is for inserting only a metadata file for that granule, not the granule science files. Valid values are:	Y – Insert the metadata file only N – Insert science granule files and metadata file
minDayKey	DI FactTemporalRange	Minimum temporal key for granule base on temporal range from DIDimensionTemporal with temporal type day.	
minMnthKey	DI FactTemporalRange	Minimum temporal key for granule base on temporal range from DIDimensionTemporal with temporal type month.	

**Table 3-94. Column Descriptions (17 of 32)**

Column Name	Table	Column Description	Valid Values
minWeekKey	DIFactTemporalRange	Minimum temporal key for granule base on temporal range from DIDimensionTemporal with temporal type week.	
minYearKey	DIFactTemporalRange	Minimum temporal key for granule base on temporal range from DIDimensionTemporal with temporal type year.	
misrCameraId	DIOrbitCalculatedSpatial	SensorShortName for a MISR granule.	
misrOrbitNumber	DIOrbitCalculatedSpatial	Orbit number for a MISR granule.	
misrProductVersion	DIOrbitCalculatedSpatial	ProductVersion PSA for a MISR granule.	
monthKey	DIDimensionTemporal	Null if temporalType is Y or M. If temporalType is W or D, this field is used to cross reference this row to its corresponding month row in this table; i.e., this field contains the value of temporalKey for the row where temporalType is M, and this day or week is within that month.	
moveFlag	DICollections	Flag uses to indicate whether the collection is in the process of moving to a different file system.	Y – in the process of moving N – not in the process of moving (default)
myLock	DIRestoreOlaLock	Used as a mutex when updating restore request information.	
name	DIThemes	The theme name.	
NominalCoverageRule	DICollections	The rule used to derive the target directory name for a collection with nominal granule coverage.	
NonECSFlag	DICollections	If set, indicates that granules in this collection originated outside of ECS.	
notes	DIOrder	Notes from operator on status of order	

**Table 3-94. Column Descriptions (18 of 32)**

Column Name	Table	Column Description	Valid Values
number	DIStatESDT DIStatGroupESDT DIStatTheme	The total number of granules which the collection group, collection or theme contains.	
numFilesChecksummed	DIDPCVHistory	The total number of files checksummed.	
numFilesChecksumFailed	DIDPCVHistory	The number of checksum failures.	
numFilesChksumMismatch	DIDPCVHistory	The number of checksum failures due to mismatched checksums.	
objectId	DIHdfObjects DIGranuleHdfObjectsXref DICartOrderItemBand	Unique identifier for a HDF-EOS object	
objectName	DIHdfObjects	The name of a HDF object	
objectType	DIHdfObjects	The type of a HDF object	S – Swath G – Grid
OperationalQualityFlag	DIMeasuredParameter	Operational quality flag value for a measured parameter.	
OperationalQualityFlagExplan	DIMeasuredParameter	Explanation for the operational quality flag.	
optionId	DIHEGOptions DIHEGOptionLabel DIHEGOptionCollXref	Unique identifier for a HEG option.	
optionName	DIHEGOptions	Name of the HEG Option	

**Table 3-94. Column Descriptions (19 of 32)**

Column Name	Table	Column Description	Valid Values
optionType	DIHEGOptions	Type of HEG Option.	Format, Projection, Subsetting, Resampling, Subsampling, Stitching, Resolution
Orbit	DIOrbitPolygons	A polygon type representation of an orbit spatial coverage.	
orderId	DICartOrder DICartOrderItem	Order id which the item belongs.	
orderOnlyFSLabel	DICollections	Order Only file system label	
orderOnlyGrpDirName	DICollectionGroup	Order only group level directory name	
orderOnlySNDirName	DICollections	Order only collection level directory name	
origChksum	DIFile	Checksum that generated by EcUtCopy.	
outputFmt	DICartOrderItem	Output map projection for file	
outputProj	DICartOrderItem	Output format for file – hdfeos/geotiff	
owner	DIOMSGranules	The owner that holds the mutex for this granule	O – in use by OMS C – in use by DPL cleanup D – in use by DPAD N – in use by NDPIU Q – in use by QAUU U – in use by the unpublsh utility
pad1	DIActiveInsertProcesses	A dummy field to pad the record to a 2k page boundary.	
pad2	DIActiveInsertProcesses	A dummy field to pad the record to a 2k page boundary.	
pad3	DIActiveInsertProcesses	A dummy field to pad the record to a 2k page boundary.	
pad4	DIActiveInsertProcesses	A dummy field to pad the record to a 2k page boundary.	
parameterDescription	DIConfig	The description of the parameter	

**Table 3-94. Column Descriptions (20 of 32)**

Column Name	Table	Column Description	Valid Values
ParameterName	DIMeasuredParameter DIQAUpdTempBcp DIQAUpdFlagTemp	Name of a measured parameter for a granule	
parameterName	DIConfig DIRecoveryParameters	The name of the configuration parameter	
parameterType	DIConfig	The data type of the parameter. The valid values are:	I – integer C – character F – float
parameterValue	DIRecoveryParameters	The value of the parameter.	
parentPid	DIActiveInsertProcesses	The Unix pid of the parent Data Pool Action Driver (DPAD) process that created this DPIU.	
PathNo	DI DimensionPolygonXref DIOrbitPolygons DIOrbitCalculatedSpatial	Orbit number.	
platformShortName	DIPlatInstrCode DINOSELookup	The short name of a platform.	
platInstrCode	DIPlatInstrCode DIOrbitPolygons DIOrbitCalculatedSpatial DI DimensionPolygonXref	A code identifying a particular platform and instrument.	
preConvertEnabledFlag	DIThemes	A flag to indicate whether the data should be converted to GeoTiff format prior to inserting the granule into the data pool.	Y – yes (pre-convert) N – no (don't pre-convert)
processId	DIActiveInsertProcesses DIECSIdsToInsert DIXMLFilesToInsert DIDPCVHistory	Unix process Id for the utility.	
processState	DIInsertActionQueue	The current state of processing of a request.	R- marked for retrieval P – picked up by driver S – suspended C – completed F – failed X – canceled
procName	DIProcAttributes	The name of the stored procedure	
processingState	DI GranuleOWS DIInsertActionQueue	The current processing state of an OWS granule.	Converted, indexed, published

**Table 3-94. Column Descriptions (21 of 32)**

Column Name	Table	Column Description	Valid Values
ProductionDateTime	DIBrowse	The time when the associated science granule was created.	
projParamStr	DICartOrderItem	List of projection parameters.	
projectionId	DIHEGExceptions	Identifier for HEG projection	
PublicPriority	DICollections	The default priority for public granules in this collection.	
PublicRetTime	DICollections	The default retention time for public granules in this collection.	
publishTime	DIGranules, DIBrowse	The time when the granule was made public.	
qaCode	DIDimensionScienceQA DIDimensionMPScienceQ AXref	Uniquely Identifies a value of the Science QA flag	
qaDescription	DIDimensionMP DIDimensionScienceQA	The description for the key and the value.	
qaExpIValue	DIQAUpdFlagTemp DIQAUpdTempBcp	The value for Quality Flag Explan.	
qaFlagType	DIQAUpdFlagTemp DIQAUpdTempBcp	Either ScienceQualityFlag or OperationalQualityFlag	Valid values: ScienceQualityFlag OperationalQualityFlag
qaKey	DIDimensionMP DIDimensionMPScienceQ AXref DIFactQA	Uniquely Identifies a measured parameter or the value of the Science QA flag	
qaNameKey	DIDimensionMPScienceQ AXref	This field contains the value of qaKey for the corresponding measured parameter.	
QAPercentCloudCover	DIMeasuredParameter	The quality percentage for cloud cover.	
QAPercentInterpolatedData	DIMeasuredParameter	The quality percentage for Interpolated data.	
QAPercentMissingData	DIMeasuredParameter	The quality percentage for missing data.	
QAPercentOutOfBoundsData	DIMeasuredParameter	The quality percentage for OutOfBounds data.	

**Table 3-94. Column Descriptions (22 of 32)**

Column Name	Table	Column Description	Valid Values
qaValue	DI DimensionMP DIQAUpdFlagTemp DI DimensionScienceQA DIQAUpdTempBcp	The value for the parameter	Actual value of ScienceQualityFlag or OperationalQualityFlag
qualitySummary	DI Collections	URL that displays the quality information.	
RaiseReason	DI AdAlert	Text message giving the reason for the alert.	
RaiseTime	DI AdAlert	Open time for the alert.	
RangeBeginningDate	DI Granules	Date when the granule acquisition started	
RangeBeginningTime	DI Granules	Time when the granule acquisition started	
RangeEndingDate	DI Granules	Date when the granule acquisition ended	
RangeEndingTime	DI Granules	Time when the granule acquisition ended	
realName	DI CartOrder	User's real name	
replacementOn	DI Collections	Flag uses to indicate whether granule replacement is allowed for the collection	"Y" – granule replacement allowed "N" – granule replacement not allowed
required	DI HEGOptionCollXref	Value indicates whether the HEG option is required.	"N" – not required, (default) "A" – absolutely required "O" – required
requestId	DI InsertActionQueue	Request ID from OMS.	
requestId	DI RestoreRequests	An identifier for a row in the table.	
requestSuspendFlag	DI InsertActionQueue	Flag uses to indicate whether the request suspended.	
resolutionId	DI HEGExceptions	Identifier for HEG resolution option.	
resamplingId	DI HEGExceptions	Identifier for HEG resampling option.	
ResourceID	DI AdAlert	Label of the resource for which the alert was raised.	
requestId	DI RestoreOlaFilesFromTape, DI RestoreTapeFilesFromOla	The request ID in DI RestoreRequests	

**Table 3-94. Column Descriptions (23 of 32)**

Column Name	Table	Column Description	Valid Values
retentionPeriod	DIActiveInsertProcesses DIInsertActionQueue	The retention period associated with this subscription.	
RetentionPriority	DIUpdGranulesTemp	Retention Priority for a granule, uses to indicate how long that a granule is retained in Data Pool.	Valid values between 1 and 255
retentionPriority	DIActiveInsertProcesses DIInsertActionQueue DIGranuleExpirationPriority	Priority of the granule in the Data Pool database	Valid values between 1 and 255
retryCount	DIActiveInsertProcesses DIInsertActionQueue	Counts the number of retries for the action.	
runId	DIDPCVHistory	Identifier for a particular row in the table.	
rollupBeginningDateT ime	DIAccessRollup	The starting time at which Data Pool accesses are extracted from the ftp or web logs.	
rollupEndingDateTim e	DIAccessRollup	The ending time at which Data Pool accesses are extracted from the ftp or web logs.	
ScienceQualityFlag	DIMeasuredParameter	ScienceQuality Flag for a measured parameter	
ScienceQualityFlagE xplan	DIMeasuredParameter	Explanation of the Science Quality Flag	
SequenceNo	DIDimensionPolygonXref DIOrbitPolygons	The sequence of the polygon for a MISR orbit granule.	
serviceRequested	DIGranuleOWS DIOWSDeletedGranules DIThemes	The OWS services for which a granule is registered.	M (registered with WMS), C (registered with WCS), B (registered with both WMS and WCS), null (not registered)

**Table 3-94. Column Descriptions (24 of 32)**

Column Name	Table	Column Description	Valid Values
ShortName	DIBulkWrkTable DICollections DIGranules DIInsertActionQueue DIFilesToBeDeleted DIActiveInsertProcesses DINOSELookup DIHEGLookup DIXMLFilesToInsert DIRestoreOlaFilesFromTa pe DIRestoreTapeFilesFrom Ola	ECS collection short name	
size	DIStatESDT	The total size of all granules for the collection.	
sizeMB	DIGranules DIFactTemporalRange	The granule size in MB	
sourceDescription	DICloudCoverSource	The cloud cover source description	
sourceName	DICloudCoverSource	The name uses to identify the cloud cover source.	
sourceType	DICloudCoverSource	Cloud cover source type	P – PSA C – Core Metadata
spatialKey	DIDimensionSpatialT6All DIDimensionPolygonXref	Uniquely identifies a geographical location tile.	
spatialSearchType	DICollections	Type of spatial search associated with the collection (e.g. Orbit, Gpolygon, Rectangle)	Valid values “Orbit,” “Rectangle,” “Gpolygon,” “Point,” “Circle,” “Not Supported,” and “Unknown” (default)

**Table 3-94. Column Descriptions (25 of 32)**

<b>Column Name</b>	<b>Table</b>	<b>Column Description</b>	<b>Valid Values</b>
specialActionFlag	DIFtpAccessLog DIGranuleAccess	This flag will determine the format of the file. Valid values are	CT - Compressed & tar UT - Uncompressed & tar T - Tar _ - No action
startBlockNumber	DIRestoreOlaFilesFromTape	Position on the tape where the file begins.	
StartBlock	DIOrbitCalculatedSpatial	The ordinal number of the polygon where granule coverage starts. It points to the polygons covering this orbit in DIOrbitPolygons.	
startTime	DIActiveInsertProcesses DIDPCVHistory DIRestoreRequests	Time current action was dispatched.	
state	DIFilesToBeDeleted	The status of cleaning up a granule.	0 – successfully deleted (default) 1 – not deleted
status	DIInsertActionQueue	The current status of the action.	NULL – the action was not yet processed COMPLETE – the action is done FAILED – the action is failed RETRY – the action is retried NOTINIT – the action is not initiated CANCELED – the action was canceled by the operator

**Table 3-94. Column Descriptions (26 of 32)**

Column Name	Table	Column Description	Valid Values
status	DIActiveInsertProcesses	The current status of the current process.	STARTING – process was initialized and has started to process a Data Pool insert. PROCESSING – the current process is in process LOCATING GRANULE FILES – looking for science granule files LOCATING BROWSE FILES – looking for browse granule files COPYING GRANULES FROM AMASS – copy science granules from the AMASS host GENERATING XML FILE – generating the metadata file in XML format MOVING GRANULE TO DATA POOLS – copy granule into Data Pool COPYING SDSRV INVENTORY – copy metadata from the AIM database

**Table 3-94. Column Descriptions (27 of 32)**

Column Name	Table	Column Description	Valid Values
status	DIActiveInsertProcesses	(The current status of the current process.)	POPULATING THE DATA WAREHOUSE – populating all the fact tables PROCESSING BROWSE XREF – generate cross-reference between science granule and browse granule MOVING BROWSE TO DATA POOLS – copy browse granules into Data Pool COPYING BROWSE FROM AMASS – copy browse granule from the AMASS host EXTRACTING JPEGS – extra the jpeg from the browse file UPDATING BROWSE INVENTORY – update the browse inventory data in Data Pool database CREATING BROWSE LINKS – create links for browse file

**Table 3-94. Column Descriptions (28 of 32)**

Column Name	Table	Column Description	Valid Values
status	DICartOrder	The current status of the order	<NULL>- order just entered into system ENTERED - order ready for HEG processing PROCESSED – order processed by HEG PACKAGING - order is now being packaged DONE – order complete (user notified if necessary) FAILOPER – order failed – operator should be notified FAILOPERN - order failed – operator has been notified FAILED- order is failed – cannot retry
status	DICartOrderItem	status (of individual file)	
status	DIBatchBrowseToDelete DIBatchGransToDelete	status of the delete	'L' = locked, 'P' = not locked.
status	DIDPCVHistory	Status of the DPCV run.	Possible values are 'PROCESSING', 'Success', 'Expired', 'Failure'
status	DIRestoreRequests	Status of the restore.	"New", "Initialized", "Complete", "Failed", "CompleteWithErrors", "Aborted"
status	DIRestoreOlaFilesFromTape, DIRestoreTapeFilesFromOla	Status of the restore.	"Initialized", "Copied", "Checksummed", "Complete", "Failed"
statusDetail	DIInsertActionQueue DIRestoreOlaFilesFromTape, DIRestoreTapeFilesFromOla	Detailed explanation of the status.	
stitchingId	DIHEGExceptions	Identifier for HEG stitching	

**Table 3-94. Column Descriptions (29 of 32)**

Column Name	Table	Column Description	Valid Values
subId	DIGranuleSubscription DIInsertActionQueue	The ID of a subscription that caused the insertion of the granule in the Data Pool. This is a cross-reference to the Spatial Subscription Server database.	
SubmitTime	DIAdMessages	The time at which the server message was inserted.	
subsamplingId	DIHEGExceptions	Identifier for HEG sub sampling	
subsetId	DIHEGExceptions	Identifier for HEG subsetting option.	
subsetFlag	DICartOrderItem	Flag uses to indicate whether the order requires subsetting.	
tapeLabel	DIInsertActionQueue	Indicate which tape to use.	
temporalBeginDate	DIDimensionTemporal	The beginning time for the date range	
temporalEndDate	DIDimensionTemporal	The ending time for the date range	
temporalKey	DIDimensionTemporal	Uniquely Identifies a date range bin	
temporalType	DIDimensionTemporal	Identifies the type of key.	D – Day W – Week M – Month Y – Year
themeDescription	DIThemes	Description of theme	
themeld	DIThemes DIGranuleThemeXref DIStatTheme DIInsertActionQueue	The unique ID that identifies a data pool theme.	
tile	DIDimensionSpatialT6All	The index for the geographical location	
tiles	DIGranuleTiles	The HEX representation of the list of spatial keys for a granule.	
timeOfDayBeginTime	DIDimensionTimeOfDay	The beginning time of the period	
timeOfDayEndTime	DIDimensionTimeOfDay	The ending time of the period	
timeOfDayKey	DIDimensionTimeOfDay DIFactTimeOfDay	Uniquely identifies periods of the day	

**Table 3-94. Column Descriptions (30 of 32)**

<b>Column Name</b>	<b>Table</b>	<b>Column Description</b>	<b>Valid Values</b>
timeOfDayType	DIDimensionTimeOfDay	Type that is used to describe a period of the day.	1 – One hour 3 – 30 minutes 4 – Four hours D – Day H – Half day
timestamp	DICartOrder	last update time/date	
todFourHourKey	DIDimensionTimeOfDay	Null if timeOfDayType is D, H, or 4. If timeOfDayType is 1 or 3, this field is used to cross reference this row to its corresponding 4-hour row in this table; i.e., this field contains the value of timeOfDayKey for the row where timeOfDayType is 4, and the time range for that 4 hour row contains the time range for this row.	
todHalfDayKey	DIDimensionTimeOfDay	Null if timeOfDayType is D or H. If timeOfDayType is 1, 3 or 4, this field is used to cross reference this row to its corresponding halfday row in this table; i.e., this field contains the value of timeOfDayKey for the row where timeOfDayType is H, and the time range for that half day row contains the time range for this row.	
todHourKey	DIDimensionTimeOfDay	Null if timeOfDayType is D, H, 4, or 1. If timeOfDayType is 3, this field is used to cross reference this row to its corresponding hour row in this table; i.e., this field contains the value of timeOfDayKey for the row where timeOfDayType is 1, and the time range for that hour row contains the time range for this row.	

**Table 3-94. Column Descriptions (31 of 32)**

Column Name	Table	Column Description	Valid Values
transferTime	DIFtpAccessLog DIGranuleAccess	Total transfer time in seconds	
twentyFourHr	DICollections	Flag uses to indicate whether the collection has twenty four hours coverage.	Y – has twenty-four hour coverage N – does not have twenty-four hour coverage (default)
type	DIRestoreRequests	The type of restore being requested.	RestoreOlaFromTape RestoreTapeFromOla
ul_lat	DICartOrderItem	upper left latitude	
ul_lon	DICartOrderItem	upper left longitude	
uncompChksum	DIFile	Checksum for uncompressed file, calculated on the DPL host.	
uncompChksumTypeId	DIFile	Unique Identifier for the checksum type from AIM DsMdChecksumType table.	1=ECS 2=CKSUM
utilityName	DIRecoveryParameters	Name of the Utility	
VersionId	DIBulkWrkTable DICollections DIGranules DIInsertActionQueue DIFilesToBeDeleted DIActiveInsertProcesses DINOSELookup DIHEGLookup DIXMLFilesToInsert DIRestoreOlaFilesFromTape DIRestoreTapeFilesFromOla	Version of ECS collection	
versionNumber	DIGranules DIBrowse DIRestoreOlaFilesFromTape DIRestoreTapeFilesFromOla	The suffix used to rename the root filename in case of duplicates.	
webVisibleFlag	DIThemes	Flag use to determine whether granules from this theme are eligible for web drill down in Data Pool.	Y – allow Data Pool Web Drill Down N – do not allow Data Pool Web Drill Down

**Table 3-94. Column Descriptions (32 of 32)**

Column Name	Table	Column Description	Valid Values
weekKey	DI DimensionTemporal	Null if temporalType is Y, M, or W. If temporalType is D, this field is used to cross reference this row to its corresponding week row in this table; i.e., this field contains the value of temporalKey for the row where temporalType is W, and this day is within that week.	
xmlFileName	DI XmlFilesToInsert DI InsertActionQueue DI ActiveInsertProcesses	Location of the xml file for Non-ECS granules	
xmlUpdateFlag	DI QAUpdTempBcp DI QAUpdFlagTemp	Flag uses to determine whether the XML file had updated.	Valid Values will be 'Y' or 'N'
yearKey	DI DimensionTemporal	Null if temporalType is Y. If temporalType is M, W, or D, this field is used to cross reference this row to its corresponding year row in this table; i.e., this field contains the value of temporalKey for the row where temporalType is Y, and this day, week, or month is within that year.	

### 3.1.4 Domains

Sybase supports the definition of specific data types, domains, to further limit the format of data for given column. There are no domains defined for Data Pool.Rules

Sybase supports the definitions of rules. Rules provide a means for enforcing domain constraints on a given column.

<b>Rule Name</b>	<b>Description</b>
RetentionPriority	Value of retentionPriority is between 1 and 255.
ParameterType	Value for Parameter type column in DIConfig table. The valid values are "I", "C", "F".
fileType	Valid values are "SCIENCE", "METADATA", and "BROWSE", and "BROWSELINK".
gridLevel	Valid values are between 1 and 6.
sourceType	Valid values are "P" and "C"
exceptionType	Valid values are "W", "E"
processingState	Valid values are "converted", "indexed", "published"
serviceRequested	Valid values are M (registered with WMS), C (registered with WCS), B (registered with both WMS and WCS), null (not registered)

### 3.1.5 Defaults

Defaults are used to supply a value for a column when one is not defined at insert time. The defaults defined in Sybase for the DPL database are described herein.

<b>Column Default</b>	<b>Default Value</b>
spatialSearchType	Unknown
exclusionSCFlag	N
InsertEnabledFlag	Y
state	0
inCacheFlag	Y
convertEnabledFlag	N
bulkExportedFlag	Y
archiveFlag	N
gridLevel	6
subId	-1
required	N
lastUpdate	getdate()

### 3.1.6 Views

Sybase allows the definition of views as a means of limiting an application or users access to data in a table or tables. Views create a logical table from columns found in one or more tables. DataPool uses view, EMSDistFTP, for EMS extract processing, as shown in Figure 3-2a. DIMisrProcessingCriteria, formerly a table in the database, was moved to the Inventory database and exists now as a view, as shown in Figure 3-2b.

<b>EMSDistFTP_View</b>						
<b>Object Type</b>	View					
<b>Columns</b>						
NAME	Datatype			Null		
dbld	ID			No		
age	int			Yes		
fileSize	numeric(16,0)			No		
fileType	varchar(10)			No		
accessTime	varchar(18)			Yes		
ecsId	ID			Yes		
transferTime	int			Yes		
ipAddress	varchar(15)			No		
fileName	varchar(255)			Yes		
ShortName	varchar(8)			No		
VersionId	tinyint			No		
<b>Privileges</b>						
Object Name	Delete	Execute	Insert	References	Select	Update
EMSgroup					Y	
<b>Dependencies</b>						
Referenced Objects						
Object Name	Object Type					
DIGranuleAccess	TABLE					
ID	USER DATATYPE					

**Figure 3-2a. DataPool View for EMS Extract Processing**

<b>DIMisrProcessingCriteria</b>						
<b>Object Type</b>	View					
<b>Columns</b>						
NAME	Datatype				Null	
ShortName	char(8)				No	
VersionId	tinyint				No	
type	char(1)				No	
<b>Privileges</b>						
Object Name	Delete	Execute	Insert	References	Select	Update
datapool					Y	
<b>Dependencies</b>						
Referenced Objects						
Object Name			Object Type			
EclnDb..DsMdMisrProcessingCriteria			TABLE			

**Figure 3-2b. DataPool View for MISR Processing Criteria**

### 3.1.7 Integrity Constraints

Sybase allows the enforcement of referential integrity via the use of declarative integrity constraints. Integrity constraints allow the SQL server to enforce primary and foreign key integrity checks automatically without requiring programming. Sybase constraints support “restrict-only” operations. This means that a row can not be deleted or updated if there are rows in other tables having a foreign key dependency on that row. Cascade delete and update operations can not be performed if a declarative constraint has been used. All declarative integrity constraints defined in the DPL database are described in Tables 3-95 through 3-119.

**Table 3-95. Dependencies on Table: DICollectionGroup**

Referenced by	Primary Key	Foreign Key
DICollections	groupId	groupId

**Table 3-96. Dependencies on Table: DICollections**

Referenced by	Primary Key	Foreign Key
DIESDTCurrentDensityMap	collectionId	collectionId
DIGranules	collectionId	collectionId

Table 3-97, the dependency of DIGranules on DICollections is not shown on the ERD due to space limitations. The ERDs each show a partial view of the entire system.

**Table 3-97. Dependencies on Table: DIGranules**

Referenced by	Primary Key	Foreign Key
DIGranuleExpirationPriority	granuleId	granuleId
DIGranuleBrowseXref	granuleId	granuleId
DIGranuleOWS	granuleId	granuleId
DIFile	granuleId	granuleId
DIOrbitCalculatedSpatial	granuleId	granuleId
DIGPolygon	granuleId	granuleId
DIBoundingRectangle	granuleId	granuleId
DIMeasuredParameter	granuleId	granuleId
DIGranuleTiles	granuleId	granuleId
DIFactTemporalRange	granuleId	granuleId
DIFactQA	granuleId	granuleId
DIFactTimeOfDay	granuleId	granuleId
DIFactDayNight	granuleId	granuleId
DIFactGroupESDT	granuleId	granuleId
DIGranuleThemeXref	granuleId	granuleId
DIGrCloudCover	granuleId	granuleId
DIGranuleHdfObjectsXref	granuleId	granuleId

**Table 3-98. Dependencies on Table: DIBrowse**

Referenced by	Primary Key	Foreign Key
DIGranuleBrowseXref	browseId	browseId
DIBrowseFile	browseId	browseId

**Table 3-99. Dependencies on Table: DIPlatInstrCode**

Referenced by	Primary Key	Foreign Key
DIOrbitPolygons	platInstrCode	platInstrCode

**Table 3-100. Dependencies on Table: DIDimensionSpatialT6All**

Referenced by	Primary Key	Foreign Key
DIDimensionPolygonXref	spatialKey	spatialKey

**Table 3-101. Dependencies on Table: DIDimensionTimeOfDay**

Referenced by	Primary Key	Foreign Key
DIFactTimeOfDay	timeOfDayKey	timeOfDayKey

**Table 3-102. Dependencies on Table: DIDimensionDayNight**

Referenced by	Primary Key	Foreign Key
DIFactDayNight	dayNightKey	dayNightKey

**Table 3-103. Dependencies on Table: DIDimensionGroupESDT**

Referenced by	Primary Key	Foreign Key
DIFactGroupESDT	groupESDTKey	groupESDTKey

**Table 3-104. Dependencies on Table: DIOrbitPolygons**

Referenced by	Primary Key	Foreign Key
DIDimensionPolygonXref	platInstrCode	platInstrCode
DIDimensionPolygonXref	PathNo	PathNo
DIDimensionPolygonXref	SequenceNo	SequenceNo
DIOrbitCalculatedSpatial	platInstrCode	platInstrCode
DIOrbitCalculatedSpatial	PathNo	PathNo

**Table 3-105. Dependencies on Table: DIThemes**

Referenced by	Primary Key	Foreign Key
DIGranuleThemeXref	themeld	themeld

**Table 3-106. Dependencies on Table: DICartOrder**

Referenced by	Primary Key	Foreign Key
DICartOrderItem	orderId	orderId

**Table 3-107. Dependencies on Table: DIDimensionMP**

Referenced by	Primary Key	Foreign Key
DIDimensionMPScienceQAXref	qaKey	qaNameKey

**Table 3-108. Dependencies on Table: DIDimensionScienceQA**

Referenced by	Primary Key	Foreign Key
DIDimensionMPScienceQAXref	qaCode	qaCode

**Table 3-109. Dependencies on Table: DICompressionAlgorithms**

Referenced by	Primary Key	Foreign Key
DIFile	compAlgorithmLabel	compAlgorithmLabel
DICollections	compAlgorithmLabel	compAlgorithmLabel

**Table 3-110. Dependencies on Table: DIFileSystems**

Referenced by	Primary Key	Foreign Key
DICollections	fileSystemLabel	fileSystemLabel

**Table 3-111. Dependencies on Table: DICloudCoverSource**

Referenced by	Primary Key	Foreign Key
DICollections	cloudSourceId	cloudSourceId

**Table 3-112. Dependencies on Table: DIHdfObjects**

Referenced by	Primary Key	Foreign Key
DIGranuleHdfObjectsXref	objectId	objectId
DICartOrderItemBand	objectId	objectId

**Table 3-113. Dependencies on Table: DIHdfBands**

Referenced by	Primary Key	Foreign Key
DIGranuleHdfObjectsXref	bandId	bandId
DICartOrderItemBand	bandId	bandId

**Table 3-114. Dependencies on Table: DIHdfFields**

Referenced by	Primary Key	Foreign Key
DIGranuleHdfObjectsXref	fieldId	fieldId

**Table 3-115. Dependencies on Table: DIHdf4thDimensions**

Referenced by	Primary Key	Foreign Key
DIGranuleHdfObjectsXref	dimId	dimId
DICartOrderItemBand	dimId	dimId

**Table 3-116. Dependencies on Table: DICartOrderItem**

Referenced by	Primary Key	Foreign Key
DICartOrderItemBand	itemId	itemId

**Table 3-117. Dependencies on Table: DIHEGOptions**

Referenced by	Primary Key	Foreign Key
DIHEGOptionCollXref	optionId	optionId
DIHEGOptionLabel	optionId	optionId

**Table 3-118. Dependencies on Table: DIHEGExceptions**

Referenced by	Primary Key	Foreign Key
DIHEGExceptionCollXref	exceptionId	exceptionId

**Table 3-119. Dependencies on Table: DIRestoreRequests**

Referenced by	Primary Key	Foreign Key
DIRestoreOlaFilesFromTape	requestId	requestId
DIRestoreTapeFilesFromOla	requestId	requestId

### 3.1.8 Triggers

Sybase supports the enforcement of business policy via the use of triggers. A trigger is best defined as set of activities or checks that should be performed automatically by Sybase whenever a row is inserted, updated, or deleted from a given table. Sybase allows the definition of insert, update, and delete triggers for each table. Description of each of the triggers in the Data Pool database is given in Table 3-120. Trigger code may vary as new drops or test executables for Release 7 are installed into the implemented database. For this reason trigger code listings are no longer included in this documentation but may be reviewed on-line using the installed database.

**Table 3-120. Trigger Listing**

Table Code	Trigger Name	Trigger Type
DIBoundingRectangle	TrigUpdDIBoundingRectangle	Update
DICartOrderItem	TrigUpdCartOrderStatus	Update
DICollectionGroup	TrigInsCollectionGroup	Insert
DICollectionGroup	TrigDelCollectionGroup	Delete
DICollectionGroup	TrigUpdCollectionGroup	Update
DICollections	TrigInsCollections	Insert
DICollections	TrigDelCollections	Delete
DICollections	TrigUpdCollections	Update
DIConfig	TrigUpdDIConfig	Update
DIFile	TrigUpdDIFile	Update
DIFileSystems	TrigUpdFileSystems	Update
DIGPolygon	TrigUpdDIGPolygon	Update
DIGrCloudCover	TrigUpdDIGrCloudCover	Update
DIGranuleExpirationPriority	TrigUpdDIGranExpPriority	Update
DIGranuleTiles	TrigUpdDIGranuleTiles	Update
DIGranules	TrigInsDIGranules	Insert
DIGranules	TrigDelDIGranules	Delete
DIGranules	TrigUpdDIGranules	Update
DInsertActionQueue	TrigInsIAQ	Insert
DInsertActionQueue	TrigUpdIAQ	Update
DIMeasuredParameter	TrigInsMeasuredParameter	Insert
DIMeasuredParameter	TrigUpdMeasuredParameter	Update
DIOrbitCalculatedSpatial	TrigInsOrbitCalculatedSpatial	Insert
DIOrbitCalculatedSpatial	TrigUpdOrbitCalculatedSpatial	Update
DIPrivateCollection	TrigInsPrivateColl	Insert

### 3.1.9 Stored Procedures

Sybase also includes support for business policy via the use of stored procedures. Stored procedures are typically used to capture a set of activities or checks that will be performed on the database repeatedly to enforce business policy and maintain data integrity. Stored procedures are parsed and compiled SQL code that reside in the database and may be called by name by an application, trigger or another stored procedure. A listing of each the stored procedures in the Data Pool database is given here. A brief definition of each of these stored procedures follows in Table 3-121. Stored procedure code may vary as new drops or test executables for Release 7 are installed into the implemented database. For this reason stored procedure code listings are no longer included in this documentation but may be reviewed on-line using the installed database.

**Table 3-121. Procedure Listing (1 of 31)**

Name	Description
DIGetOMSInserts	Returns the number of OMS inserts
DIGetSSSInserts	Returns the number of SSS inserts
DIPDIInsertComplete	Complete data of newly inserted entries in the DIPendingDelete table
ProcBackfillBrowse	This proc updates the isOrderOnly flag in DIBrowse when move the order only browse to public.
ProcBmGetOwsDplDeleted	Returns a list of OWS granules designated for cleanup.
ProcBmGetOwsIndexedGranules	Returns a list of OWS granules that have been indexed and are ready to be published in the ECHO catalogue.
ProcBmOwsMarkPublished	Updates the processing state of newly published granules.
ProcCancelInsertQueue	Updates an insert status in the DIInsertActionQueue to "CANCELLED".
ProcCanRemoveGranule	Checks whether it is OK to remove the granule from from Data Pool.
ProcCanRemoveLinkedBrowse	Remove browse association for a specified granule.
ProcCheckCoveredRollups	Checks the previous rollupdatetime to determine whether the period of rollup had been done.
ProcCheckFreeSpace	Checks the availability of a file system for a collection.
ProcCopySdsrvOrbitInfo	Copies orbit metadata from the AIM database.
ProcDeleteAssocXref	Delete all rows in DIGranuleBrowseXref table that associated with granules that are about to be deleted.
ProcDeleteBndgRectangle	Delete all granules from DIBoundingRectangle table where the granule exists in DIFilesToBeDeleted.
ProcDeleteDayNightFact	Delete from DIFactDayNight table for all granules in DIFilesToBeDeleted.
ProcDeleteFtpAccessLog	Truncate the DIFtpAccessLog table.
ProcDeleteGPolygon	Delete all granules from DIGPolygon table where the granule exists in DIFilesToBeDeleted.
ProcDeleteGranFiles	Delete all rows in DIFile where the file exists in DIFilesToBeDeleted.
ProcDeleteGroupESDTFact	Delete from DIFactGroupESDT table for all granules in DIFilesToBeDeleted.
ProcDeleteIAQOldActionItems	Remove completed actions whose completion time is older than DELETEDCOMPLETEACTIONSATER.
ProcDeleteMeasuredParameter	Delete all granules from DIMeasuredParameter table where the granule exists in DIFilesToBeDeleted.
ProcDeleteOrbCalcSpatial	Delete all granules from DIOrbitCalculatedSpatial table where the granule exists in DIFilesToBeDeleted.
ProcDelExpiredOWSGranules	Deletes from table DIOWSDeletedGranules.

**Table 3-121. Procedure Listing (2 of 31)**

Name	Description
ProcDelGranAccessByTimeRange	Delete access statistic data by a time range.
ProcDelGranAcsByTimeAndType	Delete access statistic data by a time range and the access type.
ProcDelInconsistentGranules	Checks for deleted OWS granules that were reinserted.
ProcDeleteProcess	Delete process entry from database and modify the queue based on completion status.
ProcDeleteProcessByEcslid	Delete process entry from database based on ECS ID and modify the queue based on completion status.
ProcDeleteProcessByXmlFileName	Delete process entry from database based on XML file name and modify the queue based on completion status.
ProcDeleteQAFact	Delete from DIFactQA table for all granules in DIFilesToBeDeleted.
ProcDeleteRetPriority	Delete all granules from DIGranuleExpirationPriority table where the granule exists in DIFilesToBeDeleted.
ProcDeleteSciGranules	Delete science granules that are in DIFilesToBeDeleted.
ProcDeleteSingleGranule	Delete a single granule from Data Pool database. It uses for recovery when inserted failed.
ProcDeleteTemporalFact	Delete from DIFactTemporalRange table for all granules in DIFilesToBeDeleted.
ProcDeleteTimeOfDayFact	Delete from DIFactTimeOfDay table for all granules in DIFilesToBeDeleted.
ProcDeleteWebAccessLog	Truncate DIWebAccessLog table.
ProcDIAdClearAlert	Closes an open alert in the DIAdAlert table. This procedure is called when an alert is closed, either because the condition causing the alert has been corrected, or the server is restarting. An alert is considered cleared (or closed), when it has a non-null ClearTime in the database.
ProcDIAdCompleteServerMessage	Updates a server message with a completion message and time. A message is considered completed (and hence will not be processed again) when it has a non-null CompletionTime.
ProcDIAdCreateActiveInsert	Creates a row in DIActiveInsertProcesses for a new insert request. If a row already exists (for example, it is a recovery situation), then the existing data will be returned. For new rows, representing a granule that does not already exist in the Data Pool, a new, unique identifier will be created.
ProcDIAdDeleteActiveInsert	Removes a row from the DIActiveInsertProcesses table. This procedure is called when an insert terminates (successfully, or not), and is being cleaned up.
ProcDIAdGetAllRaisedAlerts	Returns the open alerts. This procedure is called during server restart, when the server must retrieve all the currently open alerts in order to close them.

**Table 3-121. Procedure Listing (3 of 31)**

Name	Description
ProcDIAdGetArchiveFileSystems	Returns the archive file system information from the Ingest database. This procedure is called once during start up.
ProcDIAdGetBrowseGranuleFiles	Returns file information for a browse granule. This procedure is designed to match the output from ProcDIAdGetScienceFiles, hence the null values in the output results set.
ProcDIAdGetDapGranuleFiles	Returns file information for a DAP granule. This procedure is designed to match the output from ProcDIAdGetScienceFiles, hence the null values in the output results set.
ProcDIAdGetDefaultCksum	Retrieves the default checksum type from the Ingest database.
ProcDIAdGetDPLFileSystems	Returns information about the Data Pool file systems. This procedure is called once during server startup.
ProcDIAdGetECSServiceHosts	Retrieves the service host configuration from the Ingest database. This procedure is called once during server startup.
ProcDIAdGetESDTs	Retrieves all the configured collections from the Data Pool database.
ProcDIAdGetGranuleFiles	Returns the files for a given AIM granule.
ProcDIAdGetNewPendingInserts	Retrieves new granule insert requests from the DIInsertActionQueue. This procedure is called periodically by the Action Driver.
ProcDIAdGetPhGranuleFiles	Returns file information for a Processing History granule. This procedure is designed to match the output from ProcDIAdGetScienceFiles, hence the null values in the output results set.
ProcDIAdGetQaGranuleFiles	Returns file information for a QA granule. This procedure is designed to match the output from ProcDIAdGetScienceFiles, hence the null values in the output results set.
ProcDIAdGetScienceGranuleFiles	Returns the file information for a science granule.
ProcDIAdGetServerMessages	Retrieves new server messages from the database. This procedure is called periodically by the Action Driver.
ProcDIAdGetSilos	Retrieves information about the archive silos (the old archive hosts) from the STMGT database.

**Table 3-121. Procedure Listing (4 of 31)**

Name	Description
ProcDIAdInsertChecksum	Inserts a newly computed checksum into the AIM database.
ProcDIAdInsertServerMessage	Inserts a server message into the Action Driver messages table.
ProcDIAdLockGranule	Places a lock on a granule (if not already locked).
ProcDIAdRaiseAlert	Creates a row in the DIAdAlert table representing an open alert.
ProcDIAdRecoverPendingInserts	Retrieves previously executing insert requests. This procedure is called once during startup, in place of ProcDIAdGetNewPendingInserts. It resets all suspended insert requests back to the null state (so that they get reprocessed), and then selects all remaining active insert requests.
ProcDIAdRemoveClosedAlerts	Removes all closed alerts older than a given age.
ProcDIAdRemoveCompleteMessages	Removes completed server messages older than a given age.
ProcDIAdRemoveStaleGranuleLock	Removes 'stale' granule locks – those older than a configured age. Note that this procedure retrieves the age configuration directly from DIConfig, rather than accepting it as an input parameter.
ProcDIAdServerRestart	Resets the Data Pool Insert database ready for a server restart.
ProcDIAdSetACFileSystemState	Sets the state of an Archive Cache file system.
ProcDIAdSetDPLFileSystemState	Sets the status of a Data Pool file system (from the Insert perspective).
ProcDIAdSetServiceHostState	Sets the status of an ECS server host.
ProcDIAdUnlockGranule	Removes a granule lock held by the Action driver.
ProcDIAdUpdateActiveInsert	Updates the status of a granule insert in the DIActiveInsertProcesses table.
ProcDIAdUpdateQueueStatus	Update the status in DIInsertActionQueue table.
ProcDIOMRemoveStaleGranuleLock	Removes 'stale' granule locks owned by OMS those older than a configured age.
ProcGetAssocGransBrowseFiles	This procedure is used to log out the sci granules that are being removed because they have associated browse files that are missing (phantom browse in DITempPhantoms). It also returns related browseld, ecsld and the browse file name for verification purposes.

**Table 3-121. Procedure Listing (5 of 31)**

Name	Description
ProcGetChksumTypeId	Get the ID for a given checksum type.
ProcGetChksumTypeToIdMapping	Get the IDs for all checksum types.
ProcGetDplGranuleXmlFileName	This procedure returns the directoryPath and xml filename for the specified granuleId.
ProcGetDplIdInfo	Returns the relevant ESDT info for the provided SCIENCE dplid.
ProcGetEsdtInfo	Retrieves collection level info for a specified ESDT.
ProcGetGrFiles	Retrieves the complete file pathname for a granule, based on the granuleId.
ProcGetGranuleIdFS	Retrieves the absolute file system path for a granule, based on the granuleId.
ProcGetGranuleLockOwner	Returns the owner of the lock on the granule.
ProcGetHiddenDirForGranule	Return the full directory path for a granule.
ProcGetHiddenGranFileInfo	Return the appropriate filename information.
ProcGetInsertTotalByFilters	Get queue information base on batchLabel and status
ProcGetMissingXrefInfo	Get datapool granules that are yet to be linked to this browse or QA granule.
ProcGetPublicFileName	Retrieves the public (user) filename. Short name is used to identify which type of granule.
ProcGetPublicGranFileInfo	Return the appropriate filename information.
ProcGetSciFilesInDBByCollGroup	Get a list of science, metadata, and associated browse files for a given collection group order by directoryPath and filename.
ProcGetSciLinksInDBByCollGroup	Get a list of science, metadata, browse links, and associated browse files for a given collection group order by directoryPath and filename.
ProcGetScramFSForESDT	Get scrambled file system path for a given ESDT.
ProcGetSdsrvInsertInfo	Retrieve insertTime, lastUpdate from DsMdGranules and update ecsInsertTime in DPL.
ProcGetUniqueBrowseFileName	Determine if a browse granule filename is unique. If not, assign a number to append to it.
ProcGetUniqueFileName	Determine if a filename is unique. If not, assign a number to append to it.
ProcGetUniqueLinkName	Determine if a filename is unique. If not, assign a number to append to it. Update the versionNumber in DGranules.
ProcGetXmlFilePathByEcsId	This procedure selects the file path for an XML metadata file based on the ecsId for the granule.
ProcGranuleArchived	Sets the archiveTimeStamp in DGranules.
ProcInsActQueueBandBackfill	Inserts a record into DInsertActionQueue, backfilling source, retention, and priority info.
ProcInsertActionQueue	Inserts a record into DInsertActionQueue.
ProcInsertGrExpPrioHours	Insert a row into DGranuleExpirationPriority table.
ProcInsertGranSubId	Insert DGranuleSubscription if not already there.

**Table 3-121. Procedure Listing (6 of 31)**

Name	Description
ProcInsertINGESTCleanAction	Enter granule in Ingest DB for later cleaning.
ProcInsertOMSActionN	Insert a row in DIInsertActionQueue for an OMS action.
ProclsBandInserted	Checks whether a DPL granule has band information.
ProclsGranInDplForPU	Checks for existence of granule in Data Pool, and notes, if found, whether or not it is public.
ProclsGrReplacementNeeded	Check whether granule replacement is needed.
ProclsDplGranInDpl	Checks to see if granule is in the Data Pool.
ProclsGranInDpl	Checks to see if granule is in the Data Pool.
ProcLockGranuleForDplInsert	Attempt to obtain a lock on a granule.
ProcLockGranuleForOMS	Inserts into table DIOMSGranules.
ProcMarkPublicationComplete	Sets the publishTime when publication is complete.
ProcMarkRegistrationComplete	Sets the insert time when registration is complete.
ProcOSGetDelURLByList	Retrieves the deleted granuleId(s) from DPL.
ProcOSGetInsURLByList	Retrieve Inserted Ftp URLs from a work table containing ecslids of granules ingested into the Data Pool.
ProcPublishBrowseFile	Update DIBrowseFile to make the browse file public. Execute this proc in chained mode.
ProcPublishGranule	Update DIGranules to mark a granule published.
ProcPublishScienceFile	Update DIFile to make the file public. Execute this proc in chained mode.
ProcRegisterBrowseFile	Insert file details into DIBrowseFile; Execute this proc in chained mode.
ProcRegisterBrowseGranule	Register a browse granule.
ProcRegisterScienceFile	Insert file details into DIFile; Execute this proc in chained mode.
ProcRegisterScienceGranule	Insert a row into DIGranules table.
ProcRemoveAssocGranuleXrefs	Remove xrefs to a granule.
ProcRemoveGranule	Removes a granule from the database. Short name is used to identify which type of granule.
ProcRemoveGranuleBrowseXrefs	Remove xrefs to a browse granule.
ProcRemoveOriginalBrowseFile	Remove the original, hidden browse data file.
ProcSplitFileName	Splits a filename into its root and extension.
ProcUnpublishScienceFile	Updates the directory path and filename to the hidden directory path and new filename.
ProcUnpublishScienceGranule	Removes granule's metadata, updates the isOrderOnly flag, and resets the publishTime.
ProcUnLockGranule	Releases a lock on a granule.

**Table 3-121. Procedure Listing (7 of 31)**

Name	Description
ProcUnlockGranuleForOMS	Deletes from table DIOMSGranules.
ProcUpdGranExpirOmsRequest	Synchronizes the expiration dates for all granules corresponding to a single OMS request.
ProcUpdateGranuleIsOrderOnly	Set the isOrderOnly flag in DIGranules.
ProcUpdateXmlFileSize	Updates the filesize of a metadata file.
ProcGetACProcessCounts	Return max number of insert processes, insert processes that require AMASS access to cache, and processes that do not require AMASS access to cache.
ProcGetACTimeLimits	Return max time in minutes operators allow a DPIU process to complete whose files are in cache. And max time in hours operators allow a DPIU process to complete whose files are not in cache.
ProcGetActionConfig	Return action configuration values of parameter
ProcGetActiveProcesses	Retrieves all rows from the DIActiveInsertProcesses table.
ProcGetAIPList	Get all active insert processes.
ProcGetAllCollGrps	Retrieve all rows from DICollectionGroup table.
ProcGetAllConfigParms	Retrieves the value of all configuration parameters from DIConfig.
ProcGetAllowedProcesses	Retrieves rows with parameterValue of "NumOfAllowedInsertProcesses, NumOfAllowedCacheProcesses, NumOfAllowedNonCacheProcesses, RefreshRate" from the DIConfig table.
ProcGetAllOWSThemes	Returns a list of themes associated with OWS granules.
ProcGetAllCollectionsByGroupId	Returns the list of collections, opt. qualified by groupId
ProcGetBrowseFiles	Get files associated with a browse in DataPool inventory.
ProcGetBrowseLinks	Insert into DIFilesToBeDeleted all links from browse granules that are associated with science granules that qualify for deletion.
ProcGetBrowseToDelete	Select all browse links from DIFilesToBeDeleted.
ProcGetBrowseUR	Parses UR to determine whether this is a browse granule. Constructs browse UR in either case..
ProcGetCollectionDescription	Retrieves the collection description for a specific collection.
ProcGetCollections	Retrieves all collection from DICollections for a specific collection group.
ProcGetCollGrp	Retrieves a row from DICollectionGroup for a specific collection group.
ProcGetCollNotInDataPool	Retrieves the collections that are not yet in the Data Pool.

**Table 3-121. Procedure Listing (8 of 31)**

Name	Description
ProcGetDayNightKey	This procedure gathers the dayNightKey for a specific dayNight value.
ProcGetDayNightKeyMap	This procedure gathers the mapping of dayNightKey and dayNightKeyValue.
ProcGetDayNightSummary	This procedure gathers the counts of granules for each dayNightKey. All values of the dimension table are output.
ProcGetDPLGrFileInfo	Retrieves absolute file path for a science browse granule based on UR provided
ProcGetESDTSummary	This procedure gathers the counts of granules for each groupESDTKey given a groupKey
ProcGetExpiredInventory	Returns information for a list of OWS granules that have expired and have been added to DIOWSDeletedGranules.
ProcGetExtraFileInfo	Gets file info for a given ecs granule id
ProcGetFileVolumeGroup	Retrieve Volume Group related info' based on specified granule or browse id's insert time from STMGT database
ProcGetFreeSpace	Calculate the sum of the file sizes of all files that were successfully removed.
ProcGetGenericBrFileInfo	Retrieves absolute file paths for a browse granule from granule UR
ProcGetGeotiffByGeoid	Retrieves GeoTiff file information for an OWS granule.
ProcGetGranCollGroupName	Get the collection group id for the specified collection.
ProcGetGransByLimit	Insert into DIFilesToBeDeleted all files from granules which have expired and have priority less than a given limit.
ProcGetGransByTable	Populate DIFilesToBeDeleted with info for the granules in DITempGrans. This table is pre-loaded and created via the cleanup script for Data Pool.
ProcGetGranuleId	Retrieves the granuleId associated with a science file.
ProcGetGranules	Gathers the granule data associated with the all granuleId limited by max granule count.
ProcGetGroupESDTKeyMap	This procedure gathers the mapping of groupESDTKey and groupESDTValue.
ProcGetGroupESDTKeys	This procedure gathers the groupESDTKey for a specific collection.
ProcGetGroupSummary	Gathers the counts of granules for each groupKey
ProcGetIAQList	Get all insert actions that have never been processed or actions that are in retry state.
ProcGetIAQNewActions	Return all insert actions queued after this input queueid.
ProcGetInsertsSuspended	Return availabilityFlag value.

**Table 3-121. Procedure Listing (9 of 31)**

Name	Description
ProcGetLinksToDelete	Select all browse links from DIFilesToBeDeleted.
ProcGetMaxTemporalKeys	This procedure gathers the maximum set of temporal keys given a begin date and an end date.
ProcGetMaxTimeOfDayKeys	This procedure gathers the maximum set of time of day keys given a begin time and an end time.
ProcGetMinTemporalKeys	This procedure gathers the minimum set of temporal keys given a begin date and an end date.
ProcGetMinTimeOfDayKeys	This procedure gathers the minimum set of time of day keys given a begin date and an end date.
ProcGetMonthTemporalKey	This procedure gathers the temporalKey for a specific month.
ProcGetNewInventory	Returns information for a list of OWS granules inserted within a specified time range.
ProcGetNoFreeSpace	Return NoFreeSpaceFlag value.
ProcGetNotInDataPoolDesc	Retrieves the description for a collection that has not yet been added to the Data Pool.
ProcGetOrderOnlyFilePaths	Returns the full directoryPath for order only granules
ProcGetOverallSummaries	This procedure gathers the overall count, size in MB, and percent of the Datapool DB.
ProcGetOWSFileAttributes	Retrieves collection information for a science file based on its pathname.
ProcGetProcAttributeInt	Select the integer value of a given attribute name and a store procedure name.
ProcGetQAKeys	This procedure gathers the qaKey for a specific QA parameter and it's science QA flag.
ProcGetQAParamValueKeyMap	This procedure gathers the mapping of qaKey and qaValue.
ProcGetQASummary	This procedure gathers the counts of granules for each qaKey.
ProcGetScienceAquisitionDate	Return BeginningDateTime or EndingDateTime, if the former is not present, or NULL, if both are not present for the specified granule from DsMdGranules table in AIM database.
ProcGetScienceGranuleFiles	Identify files associated with a science granule in AIM database.
ProcGetScienceToDelete	Select all science and metadata files that are in DIFilesToBeDeleted.
ProcGetSdsrvBrowseGranule	Retrieve associated browse granule for the specified science granule from AIM database.
ProcGetTempDayNightSummary	This procedure gathers the counts of granules for each dayNightKey given a vector of granuleIds. All values of the dimension table are output
ProcGetTempESDTSummary	This procedure gathers the counts of granules for each groupESDTKey given a vector of granuleIds and a groupKey.

**Table 3-121. Procedure Listing (10 of 31)**

Name	Description
ProcGetTempGranules	This procedure gathers the granule data associated with the given vector of granulelds.
ProcGetTempGroupSummary	This procedure gathers the counts of granules for each groupKey given a vector of granulelds.
ProcGetTemporalSummary	This procedure gathers the counts of granules for each temporalKey given a vector of granulelds and monthKey.
ProcGetTemporalSummaryESDT	This procedure gathers the counts of granules for each temporalKey given an ESDT.
ProcGetTemporalSummaryMkey	This procedure gathers the counts of granules for each temporalKey given a month key.
ProcGetTempOverallSummaries	This procedure gathers the overall count, size in MB, and percent of the Datapool DB for a vector of granulelds.
ProcGetTempQASummary	This procedure gathers the counts of granules for each qaKey given a vector of granulelds.
ProcGetTempTemporalSummary	This procedure gathers the counts of granules for each temporalKey given a vector of granulelds and monthKey.
ProcGetTempTimeOfDaySummary	This procedure gathers the counts of granules for each timeOfDayKey given a vector of granulelds.
ProcGetTimeOfDaySummary	This procedure gathers the counts of granules for each timeOfDayKey.
ProcGetTotalInsertQueue	Retrieves the total inserts that have not been processed or whose status is not "FAILED", "CANCELLED", or "DONE" in the DIInsertActionQueue table.
ProcGetUnconvertedFiles	Returns a list of files enabled for pre-conversion which have not yet been converted.
ProcGetVolumeGroups	Return volume group details
ProcGranuleEligibleForInsert	Based on input params shortname, version and metadata flag, determine what is eligible for insert
ProInsertAccessRollup	Inserts the rollupdatetime for a specific access rollup period.
ProInsertAIP	Insert new active process details into DIActiveInsertProcesses
ProInsertBrowseFile	Insert browse file details into DIBrowseFile; Execute this procedure in chained mode
ProInsertCollections	Insert a row to the DICollections table.
ProInsertCollGrp	Insert a new collection group to DICollectionGroup table.
ProInsertDIFile	Insert granule file details into DIFile; Execute this proc in chained mode
ProInsertFtpGranuleAccess	Inserts data into DIGranuleAccess for access type FTP.
ProInsertGeotiffFiles	Inserts GeoTiff files for a granule into DIFile.
ProInsertGranuleBrowseXref	Insert xrefs into DIGranuleBrowseXref
ProInsertGranuleSubscription	Insert into DIGranuleSubscription; Execute this proc in chained mode

**Table 3-121. Procedure Listing (11 of 31)**

Name	Description
ProcInsertOWSGranule	Inserts a new row into DIGranuleOWS if not already present.
ProcInsertWebGranuleAccess	Inserts data into DIGranuleAccess for access type http.
ProclsBrowseFileInventoried	Check if this directory path/filename already exists in DIBrowseFile
ProclsNonCacheLimitReached	Find if # of noncache processes in DIActiveInsertProcesses reached config limit
ProclsOrderOnlyDirInfoPresent	Checks to see if order only dir info is present
ProclsScienceFileInventoried	Check if this directory path/filename already exists in DIFile
ProcRemoveDeletedBrowse	Removes all browse granules whose browse files have been deleted successfully in a previous run from DIFilesToBeDeleted.
ProcRemoveDeletedLinks	Removes all granules whose browse files have been deleted successfully in a previous run from DIFilesToBeDeleted.
ProcRemoveDeletedSci	Removes all granules whose files have been deleted successfully in a previous run from DIFilesToBeDeleted
ProcRemoveGoodDeletes	Clears all rows which have state equal to zero.
ProcResetMarkers	Clears all markers from DIRecoveryParameters used in recovery.
ProcResolveTemporalKey	This procedure gathers the temporalKey for a specific period range.
ProcResolveTimeOfDayKey	This procedure gathers the timeOfDayKey for a specific period range.
ProcSaveHdfBandsFieldname	Inserts HDF Bands information, including fieldName
ProcSaveHdfFields	Inserts HDF Fields information
ProcSelectGrExpiration	Retrieves the SizeMB, ShortName, VersionId, expirationDate, retentionPriority for a specific granule.
ProcStoreFieldData	Insert field and band info into a temp table
ProcTruncateTempGrans	Truncate DITempGrans table.
ProcUpdateAIPdbid	Create an image of 'old' dbld details in DIActiveInsertProcesses for the specified 'new' dbld
ProcUpdateAIPStatus	Update 'status' and 'lastStatusChangeTime' columns of the specified process to reflect different transition states during insert process
ProcUpdateBadStates	Reset the state of all rows in DIFilesToBeDeleted to 0.
ProcUpdateBrowseDIInsertTime	Update DIInsertTime for the specified browse. Execute this proc in chained mode
ProcUpdateBrowseState	Updates the state of the supplied browse file to 1.
ProcUpdateCollections	Updates the exclusionSCFlag and insertEnabledFlag for a specific collection.
ProcUpdateConfigParms	Updates all configuration parameters in DIConfig.

**Table 3-121. Procedure Listing (12 of 31)**

Name	Description
ProcUpdateGrExpiration	Updates the expirationDate and retentionPriority for a specific granule.
ProcDeleteTheme	Delete a specified theme from DIThemes
ProcGetAllThemes	Get a list of detailed theme information.
ProcGetGransToBeUpdated	Loads DIGransToBeUpdated temp table from the granules in DIUpdGranulesTemp table.
ProcGetGransToBeUpdatedByTheme	Load into a temporary table, DIGransToBeUpdated temp table, with a list of qualified granules associated with a given theme ID that satisfies the following condition: current expiration date is prior to a specified expiration date (or) current retention priority is less than a specified retention priority.
ProcGetInvalidInputGranules	Select all granules that are invalid for update.
ProcGetThemeByInsertEnabled	Get a list of theme information based on the value of the insertEnabledFlag.
ProcGetThemeld	Get themeld for a given theme name.
ProcGetUpdateGranulesSummary	Obtain summary information from the DIGranulesToBeUpdated temp table based on the status passed in.
ProcGetFilePath	Get xmlFileName based on the insQueueId that passed in.
ProcInsertTheme	Insert a theme into DIThemes.
ProcUpdateGranDIInsertTime	Update DIInsertTime for the specified granule. Execute this proc in chained mode
ProcUpdateGransExpPriority	Update the granules expiration dates and priorities in the DP inventory using information stored in the DIGransToBeUpdated temp table. The steps involved are as follows: Perform granule update in batches using a configured batch size obtained from DIProcAttributes table. Set the state of the granules that have been successfully updated to success (1) in DIGransToBeUpdated table as each batch gets updated. Return the total number and size of granules successfully updated.
ProcUpdateGranState	Update the state of the science granule to 1.
ProcUpdateLinkState	Update the state of the supplied link to 1.
ProcUpdateNonECSCollections	Update a specific Non-ECS collection.
ProcUpdateOWSGranState	Updates the processing state for a granule in table DIGranuleOWS.
ProcUpdateRefreshRate	Updates the parameter RefreshRate in DIConfig table.
ProcUpdateTheme	Updates theme information for a specified theme.
ProcUpdStateToIndexed	Updates the processing state of an OWS granule to indexed.

**Table 3-121. Procedure Listing (13 of 31)**

Name	Description
ProcDeleteAssocThemeXref	This procedure will remove all granule cross-references from the DIGranuleThemeXref table associated with the granules in the DIFilesToBeDeleted table.
ProcDropGransToBeUpdated	Deletes all existing granules in the DIGransToBeUpdated temp table.
ProcFindDeleteOrphanedBrowse	Insert all orphaned browse into DIFilesToBeDeleted and remove the obsolete browse from the inventory,
ProcGetAllBrowseFiles	This procedure returns a list of browse files in the DIBrowseFile table.
ProcGetAllCollections	Get a list of all collections in DP inventory.
ProcGetAssocGransToBeDeleted	This procedure obtains a list of science granules (science and metadata files) that are associated with the phantom browse granules found in DITempPhantoms table and inserts them into DIFilesToBeDeleted table.
ProcGetBatchSummary	Get a summary count of granules in the DIInsertActionQueue base on the status of Pending, Completed and Failed for all batch label.
ProcGetBrPhantomsToBeDeleted	This stored procedure puts the phantom browse granules found in DITempPhantoms table into DIFilesToBeDeleted table.
ProcGetCollectionsByGroupld	This procedure returns the collectionId, ShortName, VersionId for a given collection groupld.
ProcGetFilesInDBByCollGroup	Get a list of science, metadata, browse links and associated browse files for a given collection group order by directoryPath and filename.
ProcGetGransLimitByTheme	This procedure will insert into DIFilesToBeDeleted all files for granules associated with a specific theme ID which have expired and have priority less than a given limit and not associated with any other theme.
ProcGetSciPhantomsToBeDeleted	This stored procedure puts the phantom science granules found in DITempPhantoms table into DIFilesToBeDeleted table.
ProcGetThemeByWebEnabled	Get a list of theme information based on the value of the webVisibleFlag.
ProclsValidCollGroup	This procedure validates if a specified collection groupld exists in the Data Pool.
ProcRemoveThemeXref	This stored procedure removes all rows from the DIGranuleThemeXref table for a specific theme ID.
ProcTruncateFilesToBeDeleted	This procedure truncates the DIFilesToBeDeleted table.
ProcTruncateTempPhantoms	This procedure truncates the DITempPhantoms table.
ProcCartAddOrder	This procedure inserts a new order into the DICartOrder table if there is room.
ProcCartAddOrderItem	This procedure inserts a new order item into the DICartOrderItem table.

**Table 3-121. Procedure Listing (14 of 31)**

Name	Description
ProcCartAddOrderItemBand	This procedure inserts band information for an existing order.
ProcCartHEGGetBands	This procedure gets HEG band info for a specified itemId.
ProcCartHEGGetNewWork	This procedure allows the HEG Frontend to look for new work.
ProcCartMarkFailedItems	This procedure allows the Packager component of Webaccess cart to mark order items as failed if the link script failed for any reason.
ProcCartPkgGetNewWork	This procedure allows the Packager component of Webaccess cart to check for orders to complete.
ProcCartUpdateOrderItemStatus	This procedure updates the status field in the DICartOrderItem table.
ProcCartUpdateOrderStatus	This procedure updates the status and notes field in the DICartOrder table.
ProcCleanUpECSIds	This procedure deletes all rows in DIECSIdsToInsert containing this connection's spid (@pid).
ProcCleanUpXMLFiles	This procedure deletes all rows in DIXMLFilesToInsert containing this connection's spid (@pid).
ProcCountPhantomsDeleted	This procedure will count the phantoms from the DIFilesToBeDeleted table.
ProcDeleteIneligibleGranuleIds	<p>This procedure gets all ECS ids of granules from DIECSIdsToInsert that are ineligible for insert for the following reasons:</p> <ul style="list-style-type: none"> <li>Already queued in DIInsertActionQueue</li> <li>Marked as DFA or logically deleted in AIM DB</li> <li>Not in AIM DB</li> <li>In collection not enabled for insert</li> </ul>
ProcGetBandsForGranule	This procedure returns a table of band information for a specified granuleId.
ProcGetGranuleFiles	This procedure retrieves file metadata based on data type.
ProcGetNonSCMetadata	This procedure retrieves metadata based on data type.
ProcGetECSCollXMLFiles	This procedure gets all XML filenames for granules ineligible for insert because they are in an ECS collection.
ProcDeleteIneligibleXMLFiles	<p>This procedure deletes all xml files from DIXMLFilesToInsert that are ineligible for insert for the following reasons:</p> <ul style="list-style-type: none"> <li>Associated with non-existent collection</li> <li>Already queued in DIInsertActionQueue</li> <li>In collection not enabled for insert</li> </ul>

**Table 3-121. Procedure Listing (15 of 31)**

Name	Description
ProcDpadDeleteProcess	This procedure deletes a DPAD process either by ECS ID or by XML file name.
ProcDpadDeleteProcessByEcsId	This procedure deletes a DPAD process by ECS ID.
ProcDpadDeleteProcessByXml	This procedure deletes a DPAD process by XML filename.
ProcGetBatchLabels	This procedure returns all unique batch label from DIInsertActionQueue.
ProcGetCollectionId	This procedure returns the collectionId from DICollections table.
ProcGetCollInsertEnabledFlag	This procedure returns the value of insertEnabledFlag from DICollections table.
ProcGetDbIdFromLocGranId	This procedure gets the dbId(s) for a local granule id.
ProcGetDeletedGranIds	This procedure gets all ECS ids of granules from DIECSIdsToInsert that are ineligible for insert because they are marked as DFA or logically deleted in AIM DB.
ProcGetEcsBrowseGranuleFiles	This procedure identifies files associated with a browse granule in AIM database.
ProcGetEcsBrowseInternalId	This procedure gets DPL internal browse id base on the ecsid.
ProcGetEcsGranuleId	This procedure retrieves the granuleId from the DIGranules table, based on the provided ecsid.
ProcGetEcsScienceInternalId	This procedure gets DPL internal granuleId based on the ecsid.
ProcGetEDGDatapoolInfo	This procedure retrieves all necessary URL information for a particular ecs granule id to allow the EDG to display DPL inventory information to a user.
ProcGetHEGToDelete	This procedure gets all cart orders that are qualified for deletion.
ProcGetNoCollGranIds	This procedure gets all ECS ids of granules from DIECSIdsToInsert that are ineligible for insert because their collections are not in DICollections.
ProcGetNoCollXMLFiles	This procedure gets all XML filenames for granules from DIXMLFilesToInsert that are ineligible for insert because their collections are not in DICollections.
ProcGetNoInsertGranIds	This procedure gets all ECS ids of granules from DIECSIdsToInsert that are ineligible for insert because they are in collections not enabled for insert.
ProcGetNoInsertXMLFiles	This procedure gets all XML filenames for granule from DIXMLFilesToInsert that are ineligible for insert because they are in a collection not enabled for insert.
ProcGetNonEcsBrowseFiles	This procedure gets files associated with a browse in DPL inventory.

**Table 3-121. Procedure Listing (16 of 31)**

Name	Description
ProcGetNonEcsBrowseInternalId	This procedure gets DPL internal browse id based on ecsid.
ProcGetNonEcsGranuleFiles	This procedure gets the filename and filetype for a non-ecs granule.
ProcGetNonEcsScienceInternalId	This procedure gets DPL internal granule id based on ecsid.
ProcGetNonExistGranIds	This procedure gets all ECS ids of granules from DIECSIdsToInsert that are ineligible for insert because they are not in AIM database.
ProcGetNonExistGrans	This procedure reads through the DITempGrans temporary table (built from the user input file) and reports any granules not found in the DIGranules table.
ProcGetOrderMgtConfig	This procedure gets order management operator config parameters
ProcGetPhantomBrowseDetails	This procedure gets a list of phantom browse files from DIFilesToBeDeleted.
ProcGetPhantomDetails	This procedure gets a list of phantoms from DIFilesToBeDeleted.
ProcGetQueuedGranIds	This procedure gets all ECS ids of granules from DIECSIdsToInsert that are ineligible for insert because they are already queued in DIInsertActionQueue.
ProcGetQueuedXMLFiles	This procedure gets all XML filenames for granule from DIXMLFilesToInsert that are ineligible for insert because they are already queued in DIInsertActionQueue.
ProcGetScienceFileGranuleId	
ProcGetScienceQAKey	This procedure returns the QA keys based on the specified parameter name and the QA flag.
ProcGetSCToBeDeleted	This procedure puts the granuleId into a temp table, which use for cleanup the DPL inventory.
ProcGetSDSRVData	This procedure loads all necessary granule data from AIM database DsMdGranules table into temp table for subsequent processing.
ProcGetTempThemeSummary	This procedure gets count of granules grouped for each theme category given a vector of granuleIds.
ProcGetThemeByBeginningLetter	This procedure returns the theme information based on the beginning letter of a theme.
ProcGetThemeByFilters	This procedure returns the theme information based on the filters that pass in.
ProcGetThemeData	This procedure gets the themeld and insertEnabledFlag for a theme name.
ProcGetThemeKey	This procedure returns all theme key.
ProcGetThemeKeyMap	This procedure returns the value key map for theme search.
ProcGetThemeSummary	This procedure returns granule count for each theme.
ProcGetUniqueld	This procedure returns a unique DPL internal id based on the object type.

**Table 3-121. Procedure Listing (17 of 31)**

Name	Description
ProcGetUniqueIDOutput	This procedure returns a unique DPL internal id as part of the output parameter based on the object type.
ProcGetXMLFilePath	
ProcInsertBrowse	This procedure inserts a row into DIBrowse table.
ProcInsertECSActions	This procedure inserts actions for granules in DIECSIdsToInsert into DIInsertActionQueue table.
ProcInsertGranules	This procedure inserts a granule into DIGranules table.
ProcInsertGranuleTemp	This procedure inserts into myGranulesTable for web access.
ProcInsertGrExpirationPriority	This procedure inserts a row into DIGranuleExpirationPriority table.
ProcInsertMeasuredParameter	This procedure inserts a row into the DIMeasuredParameter table.
ProcInsertNonECSActions	This procedure inserts actions for granules in DIXMLFilesToInsert into DIInsertActionQueue table.
ProcInsertNonECSCollections	This procedure inserts a non-ecs collection into DPL.
ProcInsertNonEcsGranule	This procedure inserts a row into DIGranules for non-ecs granule.
ProcInsertOrbitCalSpatial	This procedure inserts a row into DIOrbitCalculatedSpatial table.
ProcInsertXMLInfo	This procedure inserts info for a non-ECS XML file into the DIXMLFilesToInsert table.
ProclsCollectionEcs	This procedure gets ecsFlag value for a specified ESDT.
ProclsEcsBrowseInDataPool	This procedure checks whether the specified browse is present in DPL inventory.
ProclsEcsGranuleProcessing	This procedure checks whether the specified granule is present in DPL inventory.
ProclsEcsSCGranuleInDataPool	This procedure checks whether a record with the specified dbld exists in DIActiveInsertProcesses.
ProclsGranuleThemeXref	This procedure determines whether a granule theme cross-reference exists in DIGranuleThemeXref.
ProclsNonEcsBrowseInDataPool	This procedure determines whether a non-ecs browse exists in DPL.
ProclsNonEcsBrowseReady	This procedure checks whether the browse exists for the granule.
ProclsNonEcsGranuleInDataPool	This procedure determines whether a non-ecs granule exists in DPL.
ProclsNonEcsGranuleInserted	This procedure checks whether the granule exists in DIGranules.
ProcDelQaUpdates	This procedure deletes rows in QA working tables that have xmlUpdateFlag = 'Y'
ProcGetDayNightFlagKey	This procedure returns the keys for day night search.

**Table 3-121. Procedure Listing (18 of 31)**

Name	Description
ProcGetQa	This procedure gets QA update data from working tables for ecslid
ProcGetXmlFileName	This procedure gets the xml filename from DIFile for an ecslid
ProclsNonEcsGranuleProcessing	This procedure checks whether a record with the specified non-ecs granule exists in DIActiveInsertProcesses.
ProclsNonEcsGranuleReady	This procedure checks whether a bunch of external granuleids already in DPL when a browse arrives alone.
ProclsSciGranGlobal	Retrieves the info to if the specified science granule is a global granule or not. The client code will implement the rules for global granules determination.
ProclsThemeEnabled	This procedure checks whether insert enabled for a specified theme.
ProcMakeThemeRetroactive	This procedure associates all granules in the data pool which were previously inserted because of a subscription with theme that is now associated with that subscription.
ProcNumOfObjects	This procedure returns the tables, procedures, triggers and view count for the database.
ProcOSGetDplDeletedURL	This procedure retrieves the deleted granuleid(s) from DPL.
ProcOSGetDplURL	This procedure retrieves ftp URLs.
ProcPopulateDIQAUpdFlagTemp	This procedure will populate the DIQAUpdFlagTemp.
ProcRemoveThemeXrefForThemes	This procedure removes all rows from DIGranuleThemeXref table for a specific theme ID as long as there is an associated entry in the DIFilesToBeDeleted table.
ProcSetXmlUpdFlag	This procedure updates xmlUpdateFlag to 'Y'.
ProcThemeEnabledForInsert	This procedure checks whether the theme is enabled for DPL insert.
ProcUpdateDirectoryPath	
ProcUpdateHEGOrder	This procedure updates the archiveFlag for a specified ordered.
ProcUpdatelsOrderOnlyFlag	This procedure updates the value of the isOrderOnly column in DIGranules.
ProcUpdateOrderMgtConfig	This procedure updates order management operator config parameters
ProcUpdatePeriodPriority	This procedure updates the retentionPriority and expiration date based on the provided granuleid.
ProcUpdateQa	This procedure updates the DIMeasuredParameter table for the ecslid with new science & operational QA value and explanation.
ProcUpdNonEcsGranInsertTime	This procedure updates the insert time for non-ecs granules.
ProcCheckActiveInsertProcesses	This procedure retrieves the value of insertEnabledFlag for an ESDT.

**Table 3-121. Procedure Listing (19 of 31)**

Name	Description
ProcDeleteCloudCover	This procedure deletes from the DIGrCloudCover table for all granules in DIFilesToBeDeleted.
ProcDeleteGranule	Remove the granule and specified cross-references.
ProcDeleteGranuleTiles	This procedure deletes from DIGranuleTiles table for all granules in DIFilesToBeDeleted.
ProcDeleteGranuleHdfObjectXref	Deletes HDF-object xref info for a granule
ProcDeleteGRHdfObjectsXref	This procedure deletes from DIGranuleHdfObjectsXref table for all granules in DIFilesToBeDeleted.
ProcDeleteLinkedGran	Remove the linked granule for a specified granule.
ProcDeleteOMSGranule	This procedure deletes from DIOMSGranules table for all granules in DIFilesToBeDeleted.
ProcDeleteOrderGranuleN	Remove granule information for a specified granule.
ProcDeleteSingleGranuleN	Remove granule information for a specified granule.
ProcGetBrowseMetadata	Creates an XML string containing minimal AIM information for a browse granule.
ProcGetCollsInDelFiles	This procedure searches through DIFilesToBeDeleted and get the distinct collection/VersionIds.
ProcGetDeletedECSSGrans	This stored procedure will collect the rows from the science database which have been marked for deletion.
ProcGetFSInfoByESDT	This procedure returns the file system info for an ESDT.
ProcGetInsertEnabledFlag	This procedure retrieves the value of insertEnabledFlag for an ESDT.
ProcGetOfflineCollections	This procedure searches through the DITempGrans table and identify which collections are on file systems that are marked unavailable. ShortName and VersionId for collections with cleanup candidates are passed back.
ProcGetQaGranIds	This procedure gets granuleId and xmlUpdateFlag to load into memory.
ProcGetRecoveryParams	This procedure returns command-line and configuration parameters from an interrupted run.
ProcInsertRecoveryParams	This procedure inserts a new row into DIRecoveryParameters for the cleanup utility.
ProcRemapCollToGrp	This procedure updates all the tables to change the group mapping info with the new group.
ProcUpdateCollToGrpMapping	This procedure updates the groupId for an ESDT.
ProcUpdateRecoveryParams	This procedure updates or inserts a row in DIRecoveryParameters for the utility based upon whether or not it already exists.

**Table 3-121. Procedure Listing (20 of 31)**

Name	Description
ProcDeleteIAQ	This procedure deletes a row from DIInsertActionQueue for a specified actionQueueId.
ProcDeleteOMSGranules	This procedure deletes a row in DIOMSGranules for a specified granuleId.
ProcGetCloudCoverSummary	This procedure retrieves cloud cover information for all collections.
ProcGetCollectionDir	This procedure would list collection level directories
ProcGetFileInfo	This procedure retrieves file information for a specified granuleId.
ProcGetFilesInDir	This procedure will return a list of files inserted in specified period for a given directory
ProcGetFSGrpESDTMappings	This procedure returns the file system, collection group, ESDT mapping
ProcGetQualitySummary	This procedure retrieves quality summary for a collection.
ProcGetTopDirEntry	This procedure will list unique short name & version Id of files inserted on specified date.
ProcInsertOMSAction	This procedure inserts a row in DIInsertActionQueue for an OMS action.
ProcInsertOMSGranule	This procedure inserts a row in DIOMSGranules for a specified granuleId.
ProcInsNonECSOMGranule	This procedure inserts a row in DIOMSGranules for a specified granuleId.
ProcInsNonECSOMGranule	This procedure inserts a row in DIOMSGranules for a specified granuleId.
ProclsCollEmpty	This procedure checks whether the collection has any granules.
ProclsCollGrpValid	This procedure checks whether the group is valid.
ProclsCollMapToCollGrp	This procedure checks whether the specified collection maps to the specified collection group.
ProclsCollValid	This procedure checks whether the specified collection is valid.
ProclsEcsSCGranuleInDP	This procedure checks whether this specified granule is present in DataPool inventory.
ProclsNonECSGranuleInDP	This procedure checks whether this specified NON-ECS granule is present in DataPool inventory.
ProcPopulateOMSTmpGranfiles	This procedure populates the OMS #GRANFile for stored procedure OmInsBulkGranules in OMS database.
ProcPopulateOMSTmpGranules	This procedure populates granule information for OMS table #Granules in stored procedure OmInsBulkGranules in OMS database.
ProcCanRemoveBrowse	This procedure removes browse association for a specified granule.
ProcDeleteAssociatedBrowse	This procedure removes the browse granule for a specified granule.

**Table 3-121. Procedure Listing (21 of 31)**

Name	Description
ProcGetCloudCoverSourceInfo	This procedure retrieves cloud cover information for a specified ESDT.
ProcGetCollInfo	This procedure retrieves collection level information for a specified ESDT.
ProcGetESDTsAvailability	This procedure checks the availability for the list of granules.
ProcGetESDTSkipFlags	This procedure returns the skip flags for a specified ESDT.
ProcGetOrbitIntersects	This procedure gets a list of spatialKey based on a search of DIDimensionPolygonXref.
ProcGetOVDplBrowseFiles	This procedure returns the directoryPath, filename for the files associated for a specified granule.
ProcGetSpatialSummary	This procedure returns the density map for a specified ESDT.
ProcGetTempCloudCoverSummary	This procedure retrieves cloud cover information for an ESDT.
ProcGetTempSpatialSummary	This procedure returns the density map for a specified ESDT.
ProcInsertGranuleHdfObjectXref	This procedure inserts HDF information for a specified granule.
ProcInsertGranuleTiles	This procedure inserts spatial information for a granule.
ProcInsertGrCloudCover	This procedure inserts cloud cover information for a granule.
ProclsMFSONInsert	This procedure checks whether DPAD should use the Multiple File System procs.
ProclsSysLevCompOn	This procedure retrieves theparameter value of CompressOnInsert from DIConfig.
ProcSaveHdf4thDimensions	This procedure inserts the HDF 4 <sup>th</sup> dimension information into DIHdf4thDimensions table.
ProcSaveHdfBands	This procedure inserts the HDF band information into DIHdfBands.
ProcSaveHdfObjects	This procedure inserts HDF objects information.
ProcUpdateCollectionGridLevel	This procedure returns the gridLevel for a specified ESDT.
ProcUpdateDIStatESDT	This procedure updates the DIStatESDT table.
ProcUpdateDIStatGroupESDT	This procedure updates the DIStatGroupESDT table.
ProcUpdateDIStatTheme	This procedure updates the DIStatTheme table.
ProcUpdateFSFreeSpace	This procedure updates the freeSpaceFlag for a specified file system.
ProcGetDplCamerald	This procedure retrieves the misrCamerald fro DIOrbitCalculatedSpatial.

**Table 3-121. Procedure Listing (22 of 31)**

Name	Description
ProcGetFileSystemPath	This procedure returns the absolute file system path and groupId for a specified collection.
ProcGetOVDpiGranuleFiles	This procedure returns directoryPath and filename for a specified granule.
ProcInsertGranuleBrowseXref	This procedure inserts MISR and MISR Browse granule association.
ProcInsertMisrBrowse	This procedure inserts the MISR browse metadata into DIBrowse.
ProclsDoubleInsertNeeded	This procedure verifies whether a double insert is needed for a specified collection.
ProclsGrReplacementNeeded	This procedure checks whether granule replacement is needed.
ProclsLevel1ProcessingOn	This procedure verifies whether MISR L1 ESDT processing is on.
ProclsLevel2ProcessingOn	This procedure verifies whether MISR L2 ESDT processing is on.
ProclsMisrProcessingOn	This procedure verifies whether MISR processing is on.
ProcRemoveActiveInsertProcess	This procedure removes a row from DIActiveInsertProcesses for a specified ecsId.
ProcDeactivateCompAlgorithm	This procedure deactivates a compression algorithm.
ProcDeleteBackfilledOMSInfo	This procedure removes all OMS information from the tables that are backfilled because it is an order only granule.
ProcDeleteCloudCoverSource	This procedure deletes a specified cloud cover source.
ProcDeleteSingleBrowse	This procedure deletes a browse.
ProcGetAllCloudSource	This procedure retrieves a list of cloud cover source information.
ProcGetAssociatedCollections	This procedure returns all collections for compression algorithms.

**Table 3-121. Procedure Listing (23 of 31)**

Name	Description
ProcGetChecksumByFile	This procedure returns the checksumType and checksumValue for a specified file from the AIM database.
ProcGetCloudSourceId	This procedure returns the cloudSourceId for a specified sourceName, sourceType.
ProcGetCompAlgorithms	This procedure returns all compression algorithms.
ProcGetDplGranuleXmlFile	This procedure returns the directoryPath and the xml filename for a specified granule.
ProcGetESDTSummaries	This procedure returns the total granule count and granule size for a specified ESDT.
ProcGetFileSystemLabels	This procedure returns a list of file system labels.
ProcGetFileSystemsInfo	This procedure returns all file systems information.
ProcGetInsertQueueByFilters	This procedure returns the insert queue information based on the filters.
ProcInsertCloudCoverSource	This procedure inserts a row into DICloudCoverSource.
ProcInsertCompAlgorithm	This procedure inserts compression algorithms.
ProcInsertFileSystem	This procedure inserts a row for a file system.
ProclsCollHasCloudCoverGrans	This procedure checks whether there are any granules that have cloud cover information for a specified ESDT.
ProclsOMSGranule	This procedure verifies whether the specified granule is an order only granule.
ProcSetDisplayAIPChunkSize	This procedure updates the parameter value for DisplayAIPChunkSize parameter in DIConfig.
ProcSwitchToTapeProcess	This procedure updates the inCacheFlag when a granule is not in cache.
ProcUnflagOMSGranule	This procedure resets the isOrderOnly flag to null.
ProcUpdateCloudCoverSource	This procedure updates the specified cloud cover source.
ProcUpdateCompAlgorithm	This procedure updates the specified compression algorithms.
ProcUpdateFileSystem	This procedure updates a file system.
ProcClearMoveFlag	This procedure resets the move flag in DICollections table.
ProcCopySdsrvDapInventory	This procedure copies the DAP granule information from AIM.
ProcCopySdsrvInventory	This procedure calls another copy inventory proc base on the granule type.
ProcCopySdsrvPhInventory	This procedure copies the PH granule information from AIM.
ProcCopySdsrvQaInventory	This procedure copies the QA granule information from AIM.

**Table 3-121. Procedure Listing (24 of 31)**

Name	Description
ProcDeleteCollection	Deletes a single collection from the DPL DB.
ProcDeleteOrderGranule	This procedure removes Datapool inventory for order-only granule.
ProcDelRecoveryParams	This procedure deletes rows from DIRecoveryParameters bases on the parameter.
ProcGetAcquisitionDate	This procedure retrieves the acquisition date.
ProcGetAgingConfigInfo	This procedure retrieves the aging configuration information from DIAgingConfig.
ProcGetAIPByStatusTime	This procedure retrieves all rows from the DIActiveInsertProcesses table by descending status time
ProcGetAIPStatusFilters	This procedure retrieves NumOfAllowedInsertProcesses, NumOfAllowedCacheProcesses, NumOfAllowedNonCacheProcesses, RefreshRate from the DIConfig table.
ProcGetBandsForGranule	This procedure retrieves the band information for a granule.
ProcGetBrowseFileBrowseId	This procedure retrieves the browse id for a browse file.
ProcGetCartOrderItemInfo	This procedure retrieves the cart order item information.
ProcGetCollPath	This procedure retrieves the collection path.
ProcGetDapGranuleFiles	This procedure retrieved the data files for a DAP granule.
ProcGetDapMetadata	This procedure retrieves the metadata information for an DAP granule and uses for generate the XML file.
ProcGetFileVolumeGroup	Retrieve stmgmt Volume related info based on specified granule or browse id's insert time.
ProcGetGroupESDTKey	This procedure retrieves the group ESDT key.
ProcGetHiddenGranIds	This procedure retrieves all ecs ids in DIECSIdsToInserts that are ineligible due to DFA or logically deleted in AIM DB.
ProcGetNonSCAcquisitionDate	This procedure retrieves the acquisition date for a non-science granule.
ProcGetOrderedFiles	This procedure retrieves the ordered files.
ProcGetOrderOnlyCollPath	This procedure retrieves the absoluteFileSystemPath and groupId for a specified ESDT.
ProcGetOrderOnlyFilePath	This procedure returns the full directoryPath for an given granule.
ProcGetOrderOnlyFSInfoByESDT	This stored procedure will return the file system info for a specified ESDT.

**Table 3-121. Procedure Listing (25 of 31)**

Name	Description
ProcGetPhGranuleFiles	This procedure retrieves the data files for a PH granule.
ProcGetPhMetadata	This procedure retrieves the metadata information for PH granule and uses for generate the XML file.
ProcGetQaGranuleFiles	This procedure retrieves the data files for QA granule.
ProcGetQaMetadata	This procedure retrieves the metadata information for QA granule and uses for generate the XML file.
ProcGetQualitySummary	This procedure retrieves the quality summary info from DICollections table for an ESDT.
ProcGetSpatialSummary	This procedure returns the density map for a specified ESDT.
ProcGetStatusCount	This procedure retrieves the count base on status.
ProcGetTimeOfDaySummary	This procedure retrieves the time of day summaries for a collection.
ProcInsDeletedGranByLimit	This procedure inserts the granules in the temp table base on the priority limit and expiration date.
ProcInsDeletedGranByTheme	This procedure inserts the granules in the temp table base on a theme.
ProcInsertThemeXref	This procedure inserts rows in DIGranuleThemeXref table.
ProcIsDoubleInsertNeeded	Verified whether a double insert is needed for a specified collection.
ProcSetMoveFlag	This procedure sets the move flag in DICollections table.
ProcUpdateFSInClearAlert	Wrapper stored proc used by InClearAlert
ProcUpdateFSInColdRCleanup	Wrapper stored proc used by InColdRestartCleanup
ProcUpdateFSInCreateAlert	Wrapper stored proc used by InCreateAlert
ProcUpdateFSInInfo	Wrapper stored proc used by InUpdateFSInfo
ProcUpdateFSSuspResume	Wrapper stored proc used by InSuspResumeFS
ProcUpdateQueueStatus	This procedure updates the status in DIInsertActionQueue.
ProcUpdateActiveProcess	This procedure updates the active process in DIActiveInsertProcesses table.
ProcUpdateAgingInfo	This procedure updates the aging configuration.
ProcUpdCollFileSys	This procedure updates the file system label for a collection.
ProcUpdOrderOnlyCollFileSys	This procedure updates the order only file System path mapping for a specified ESDT
ProcUpdOrderOnlyGrpDirName	This proc creates order only hidden collection group entries in the DPL database.
ProcUpdOrderOnlySNDirName	This proc updates the orderOnlySNDirName column in DICollections for a given ESDT. If there are granules associated with the ESDT, then update the shortname portion of the directoryPath for the granules in DIFile

**Table 3-121. Procedure Listing (26 of 31)**

Name	Description
ProcGetInsertQueueAll	Get queue information for all requests that have batchLabel; based upon the status of the requests.
ProcGetDplBrowseFiles	Returns the directorypath and filename for the files associated with the specified browse granule.
ProcGetDplGranuleFiles	Returns the directorypath and filename for the files associated with the specified granule.
ProcUpdateCollGrp	Update collection group.
ProcBmgtCleanEventByDays	Cleanup events in DIBmgtEvents table for completed cycle
ProcBmgtCLMovedURLResult	Retrieves file information for BMGT events.
ProcBmgtDelEventByld	Deletes an event by cycleld
ProcBmgtGetCLMovedURLs	Return metadata for granules from moved collections
ProcBmgtGetDelURLsByList	Returns the metadata for deletion of granules specified by the user and not currently in datapool
ProcBmgtGetDeleteURLs	Returns the a list of all deleted granules whose deletion has not been exported
ProcBmgtGetInsURLsByList	Returns the URL metadata for all granules in DsMdBmgtWrkGranules table for a manual insert run
ProcBmgtGetInsertURLs	Returns a result set containing the URL metadata for all granules inserted into the public datapool prior to the specified end time and which have not been previously exported
ProcBmgtGetMETGExportURLs	Get the urls for granules whose core metadata is being exported in a METG product and do not have events in DIBmgtEvents table for a given cycle
ProcBmgtInsCleanupEvents	add events for all of the new granules marked for deletion and mark all events that will be exported in the subsequent cleanup cycle
ProcBmgtInsGransToDelete	Inserts into DIBmgtEvents information about granules that can be deleted.
ProcBmgtReGenCycleld	re-generate cycleld for a given cycleld in DIBmgtEvents
ProcBmgtResetCycleld	reset cycleld in DIBmgtEvents table
ProcBmgtUpdEventCycleld	reset cycleld in DIBmgtEvents table
ProcBmgtUpdExportStatus	mark all exported events as exported
ProcBrowseWithNoSCGranule	cleanup orphaned browse linked to hidden granules
ProcDeleteRestoreOlaByReqld	Deletes the records in the DIRestoreOlaFilesFromTape table by the requestld
ProcDeleteRestoreTapeByReqld	Deletes the records in the DIRestoreTapeFilesFromOla table by the requestld
ProcDIAdGetScGranStateInAIM	Retrieves delete info for a SC granule in AIM
ProcDIAdGetBrGranStateInAIM	Retrieves delete info for a Browse granule in AIM
ProcDIAdGetPhGranStateInAIM	Retrieves delete info for a PH granule in AIM
ProcDIAdGetQaGranStateInAIM	Retrieves delete info for a QA granule in AIM

**Table 3-121. Procedure Listing (27 of 31)**

Name	Description
ProcDIAdGetDapGranStateInAIM	Retrieves delete info for a DAP granule in AIM
ProcDIAdGetGranuleStateInAIM	Calls the appropriate stored proc to retrieve granule state information from AIM
ProcCanRemoveMISBRBrowse	Checks whether it is safe to remove a browse granule
ProcCleanComplRestoreRequests	Deletes completed requests older than a specified number of days.
ProcCleanupDPCVHistory	remove expired rows from DIDPCVHistory table
ProcCleanupDplIDB	This procedure will delete all rows associated with granules, browse that are about to be deleted
ProcDeleteBrowseWithNoScience	Removes orphaned browse granules from the database.
ProcDeleteECSIdsToInsert	Deletes from DIECSIdsToInsert based on pid
ProcDIGetGranulesForUnpublish	Retrieves a list of granules that need to be unpublished in the Data Pool.
ProcDINdFinalizeNonECSInsert	Finalizes the publication of a Non-ECS granule (if insert was successful), and updates the request in the DIInsertActionQueue table.
ProcDINdGetNonECSInserts	Retrieves Non-ECS Insert requests from the DIInsertActionQueue. This procedure is called once, at startup, by the Non-ECS Action Driver.
ProcDoNotCleanOMSGranules	Obtains a list of all the granules that are owned by OMS and uses this list to remove the locks on order only granules.
ProcExportGransToDelete	Export all the granules from the Bcp table to BMGT
ProcGetBrowsePubDirPath	This procedure will get the public browse file directory path
ProcGetEscapedFileName	Takes a filename and escapes the invalid characters to the correct format
ProcGetChecksumAlgorithms	retrieve info from Ingest database InValFileCksumType table
ProcGetDplDataFilesByDplId	Retrieves the data file names from DPL database for a given DPL granule Id of a science granule
ProcGetFileChksumForGranId	retrieve file checksum info for a given granule
ProcGetFileSystemRefresh	Returns refresh rate for DPL File Systems page
ProcGetFileVolumeGroupOutput	Another version of ProcGetFileVolumeGroup, which returns the output as parameters rather than in result tables
ProcGetGranIdsForEsdt	retrieve granuleIds for a given esdt
ProcGetIncomplRestoreOlaFiles	Retrieve the files which were not restored from DIRestoreOlaFilesFromTape with file dbID greater than the one specified.
ProcGetIncomplRestoreTapeFiles	Retrieves the files which were not restored from DIRestoreTapeFilesFromOla table with file dbID greater than the one specified.
ProcGetGranuleCollectionInfo	Selects information about public retention time and priority for a collection

**Table 3-121. Procedure Listing (28 of 31)**

Name	Description
ProcGetGranulesForCollection	Gets the granule ids by shortname, versionid from the Inventory database
ProcGetGrLinks	Retrieves the complete file pathname for associated links, based on the granuleId
ProcGetIncompleteRestoreReq	Retrieves the incomplete restore request
ProcGetNotDplGranIds	Finds granules associated with the specified pid that are not in the Data Pool
ProcGetUniqueFileFast	A faster version of the procedure to determine a unique file name for a granule.
ProcBmgtGetPhysDeleteEvs	Selects physical deletes and inserts information about these events into a temp table.
ProcBmgtGetDPLECSStateForEcsId	Gets the current ECS state in DPL for a given ecsId./
ProcCanRemoveLinkFromDisk	Determines if a browse link is shared or not and can or cannot be removed
ProcInsWebaccessTempTblByTheme	This procedure populates and maintains Webaccess temp table #myGranulesTable when theme name is selected and ESDT is not selected
ProcInsertActionDAPPublishMode	Publish a DAP granule in Data Pool
ProcInsertActionPHDefaultMode	Insert a PH granule in Data Pool
ProcInsertActionPHPublishMode	Publish a PH granule in Data Pool
ProcInsertActionQADefaultMode	Insert a QA granule in Data Pool
ProcInsertActionQAPublishMode	Publish a QA granule in Data Pool
ProcInsertActionSCDefaultMode	Insert a science granule in Data Pool
ProcInsertActionPHRegisterMode	Register a DAP granule in Data Pool
ProcInsertActionQAResisterMode	Register a QA granule in Data Pool
ProcInsertActionSCRegisterMode	Register a science granule in Data Pool
ProcInsertActionDPRRegisterMode	Register a DAP granule in Data Pool
ProcInsertActionDefaultMode	Insert a granule in Data Pool
ProcInsertActionPublishMode	Publish a granule in Data Pool
ProcInsertDPCVHistory	Insert a row in DIDPCVHistory table
ProcInsertRestoreTapeByGranId	Insert into DIRestoreTapeFilesFromOla, based on granule ID. Only science data file will be restored from OLA.
ProcGetL1L2ForMISBR	Returns a list of L1/L2 granules that link to a given MISBR granule in AIM database and is not published in DPL
ProcGetDbIdForCollection	Retrieve a list of ecsIds from the given collection for publishing
ProcGetDpId	Finds the Data Pool identifier of a granule, given its identifier in the Inventory database.
ProcGetMISBRForL1L2	Returns MISBR granule that links to a given L1/L2 granule in AIM database
ProcGetMisrEsds	Retrieves a list of MISR-related ESDTs from the Inventory database.

**Table 3-121. Procedure Listing (29 of 31)**

Name	Description
ProcGetNextRestoreTapeFiles	Retrieves the next files from DIRestoreTapeFilesFromOla table
ProcGetNextRestoreOlaFiles	Retrieve the next files without media info from DIRestoreOlaFilesFromTape with file dbID greater than the one specified.
ProcGetNonEcsGransByExpiration	This procedure insert nonecs grans by expiration date into DIBcpGranulesToDelete
ProcGetNumActiveForLabel	Retrieves the number of active processes, qualified by batch label
ProcGetRestoreOlaWOTapeInfo	Retrieves a batch of Restore Ola files which do not have a mediaId or startBlockNumber in DIRestoreOlaFilesFromTape table
ProcGetRestoreRequestByReqId	Retrieves a restore request by request Id
ProcGetRestoreOlaMediaIds	Retrieves a list of mediaIds from DIRestoreOlaFilesFromTape table
ProcGetRestoreOlaByTapeInfo	Retrieves the next SCIENCE files from DIRestoreOlaFilesFromTape table which have the specified mediaId and startBlockNumber are after the one specified.
ProcGetSpatialTypeByTheme	Selects collectionId, spatialSearchType for a given theme.
ProcGetToDeleteFiles	Gets a list of all granule and browse files to be deleted
ProcGetUniqueBrowseFileFast	Used by ProcGetUniqueBrowseFileName so that the select for collision version number uses the index in DIBrowseFile
ProcInsSQSQueryTblByESDT	This procedure populates the temp table used by Webaccess SQS queries for a given collection.
ProcInsSQSQueryTblByTheme	This procedure populates the temp table used by Webaccess SQS queries for a given theme.
ProcInsWebaccessSQSQueryTbl	This procedure populate temp table used by Webaccess SQS query.
ProcInsertActionBRDefaultMode	Insert a browse granule in Data Pool
ProcInsertActionDAPDefaultMode	Insert a DAP granule in Data Pool
ProcInsertActionSCPublishMode	Publish a science granule in Data Pool
ProcInsertActionQueueForOMS	Inserts into DIInsertActionQueue for OMS
ProcInsertActionRegisterMode	Inserts a granule into DPL by granule type.
ProcInsertRestoreOlaByGranId	Insert into DIRestoreOlaFilesFromTape, based on granule ID.
ProcInsertRestoreRequest	Inserts a restore request
ProcInsertRestoreOlaByDplFile	Insert into DIRestoreOlaFilesFromTape, based on DPL file name path
ProcInsertRestoreOlaBrlink	Insert into DIRestoreOlaFilesFromTape the browse linkage file information for a given science granule.

**Table 3-121. Procedure Listing (30 of 31)**

Name	Description
ProcInsertRestoreTapeByEcsFile	Insert into DIRestoreTapeFilesFromOla, based on ECS file name path.
ProcInsertRestoreTapeByMediaId	Insert status and statusDetail into DIRestoreTapeFilesFromOla for a given mediaId
ProcInsWebaccessTempTable	This procedure populate and maintain Webaccess temp table #myGranulesTable
ProcInsWebaccessTempTblByESDT	This procedure populates and maintains Webaccess temp table #myGranulesTable
ProcIsMISBRBrReplacementNeeded	Check whether MISBR granule replacement is needed
ProcIsMoveFlagSet	Retrieve moveFlag from DICollections based on ShortName and VersionId
ProcLockBatchGrans	Locks a batch of granules for cleanup by inserting them into the DIOMSGranules table.
ProcLockBatchBrowse	Locks a batch of browse granules for cleanup by inserting them into the DIOMSGranules table.
ProcLockGranule	Attempts to obtain a lock on a granule
ProcLockGranulesForCleanup	Populate DIBatchGransToDelete ( granuleId, status) table, insert the obsolete browse into DIBatchBrowseToDelete (Browse Id, status) table, and lock the to be deleted granules, and its browse granules in the DIOMSGranules.
ProcPublishBrowseGranule	Makes a browse granule public in the datapool.
ProcRemoveGranuleBrowse	Removes a browse granule from the datapool.
ProcRemoveMISBRFromDPL	cleanup old MISBR from DPL database and update MISBR links in AIM database
ProcSplitEcsFileNamePath	Splits the ECS internal file name path into filename (:SC:MYD10A1.005:142922:1.HDF-EOS), directoryPath (/stornext/snfs1/DEV01/MODIS), ShortName (MYD10A1) and VersionId(5), and ecsId is obtained from FileStorage tables.
ProcSplitDplFileNamePath	Splits the DPL file name path into filename, absolute directory path, and DPL directory path.
ProcUpdateDPCVHistory	Update a row in DIDPCVHistory table
ProcUpdateFileChecksum	Updates the file checksum information
ProcUpdateFileSystemRefresh	Updates refresh rate for DPL File Systems
ProcUpdateRestoreRequestStatus	Updates the status of a restore request
ProcUpdRestoreOlaStatus	Updates file status in DIRestoreOlaFilesFromTape table
ProcUpdRestoreOlaStatByMediaId	Updates file status in DIRestoreOlaFilesFromTape table
ProcUpdFileSystemLabel	Update DICollections with file system label information
ProcUpdRestoreOlaMediaInfo	Updates mediaId and tapeBlockNumber in DIRestoreOlaFilesFromTape table
ProcUpdRestoreTapeStatus	Updates file status in DIRestoreTapeFilesFromOla table

**Table 3-121. Procedure Listing (31 of 31)**

<b>Name</b>	<b>Description</b>
ProcGetBrowseLinkPath	Retrieves the pathname of the browse link
ProcDIAdGetXmlFile	Get path to xml file from the inventory database
ProcGetGranInfoByEcsId	Checks to see if granule is in the Data Pool, returning DPL granuleId and absolute dir path. Assumes that the granule is hidden.
ProcLockGranules	Lock granules for cleanup
ProcSetAIPStatusFilters	This procedure sets status filter flags for DIActiveInsertProcesses table
ProcLockBrowse	Lock browse granules for cleanup
sp_thresholdaction	Action to take when crossing the threshold.
datawarning	Print warning message when data segment threshold is crossed.
logdump	Print message and dump the transaction log when log segment threshold is crossed.
logwarning	Print warning message when log segment threshold is crossed.

### **3.2 File Usage**

There are cases when the implementation of a persistent data requirement is better suited to a flat file than to a database table. A typical example of such data is system configuration information. System configuration information is fairly static and usually has no explicit relationship to other data in the enterprise. Another common use of files in ECS is as an interface mechanism between ECS and the external world. Files utilized in Data Pool are described herein.

This page intentionally left blank.

## 4. Performance and Tuning Factors

---

### 4.1 Indexes

An index provides a means of locating a row in a database table based on the value of a specific column(s), without having to scan all data in the table. When properly implemented, indexes can significantly decrease the time it takes to retrieve data, thereby increasing performance. Sybase allows the definition of two types of indexes, clustered and non-clustered.

In a clustered index, the rows in a database table are physically stored in sequence-determined by the index. Clustered indexes are particularly useful, when the data is frequently retrieved in sequential order. Only one clustered index may be defined per table.

Non-clustered indexes differ from their clustered counterpart, in that, data is not physically stored in sorted order—newly added rows are stored at the end of the related database table.

A key of the types of indexes found in Data Pool is provided in Table 4-1 Index Type Key. A list and description of each of the defined indexes is given in Table 4-2 Index List.

**Table 4-1. Index Type Key**

Index Type Key	Description
PK	Primary Key
FK	Foreign Key
U	Unique – Only one for the column code combination
C	Clustered or non-clustered index
Sort	ASC (ascending) or DESC (descending) order

**Table 4-2. Index List (1 of 5)**

Table Code	Index Code	PK	FK	U	C
EcDbDatabaseVersions	EcDbDatabaseVersionsPkConstr	Yes	No	Yes	Yes
DIAccessRollup	DIAccessRollUpPkConstr	Yes	No	Yes	Yes
DIActiveInsertProcesses	DIActiveInsertProcessEcsIdIdx	No	No	No	No
DIActiveInsertProcesses	DIAIPPkConstr	Yes	No	Yes	Yes
DIActiveInsertProcesses	DIActInsertProcessXmlFileIdx	No	No	No	No
DIAdAlert	PK_DLADALERT	Yes	No	Yes	Yes
DIAdMessages	PK_DLADMESSAGES	Yes	No	Yes	Yes
DI AgingConfig	DI AgingConfigPkConstr	Yes	No	Yes	Yes
DIBatchBrowseToDelete	DIBatchBrowsePkConstr	Yes	No	Yes	Yes
DIBatchGransToDelete	DIBatchGransPkConstr	Yes	No	Yes	Yes
DIBcpGransToDelete	DIBcpGransToDelete	Yes	No	Yes	Yes

**Table 4-2. Index List (2 of 5)**

Table Code	Index Code	PK	FK	U	C
DIBmgtEvents	pk_bmgtevent	No	No	No	No
DIBmgtEvents	idx_bmgteventcidcollidtype	No	No	No	No
DIBmgtEvents	idx_bmgteventcidecsidgranid	No	No	No	No
DIBmgtEvents	idx_bmgteventcidgranidtype	No	No	No	No
DIBoundingRectangle	xDIBoundingRectangle	No	No	No	Yes
DIBoundingRectangle	DIBoundingRectanglePk	Yes	Yes	Yes	No
DIBrowse	DIBrowsePkConstr	Yes	No	Yes	Yes
DIBrowse	DIBrowseEcsIdIdx	No	No	No	No
DIBrowse	DIBrowseExternalIdIdx	No	No	No	No
DIBrowseFile	DIBrowseFileBrowseIdIdx	No	No	No	No
DIBrowseFile	DIBrowseFilePkConstr	Yes	Yes	Yes	Yes
DIBrowseFile	DIBrowseFileUniqueFileIdx	No	No	Yes	No
DICartOrder	DICartOrderPkConstr	Yes	No	Yes	Yes
DICartOrderItem	DICartOrderItemPkConstr	Yes	No	Yes	Yes
DICartOrderItemBand	DICartOrderItemBandItemIdIdx	No	No	No	No
DICloudCoverSource	DICloudCoverSourcePkConstr	Yes	No	Yes	Yes
DICollectionGroup	DICollectionGroupPkConstr	Yes	No	Yes	Yes
DICollections	DICollectionPkConstr	Yes	No	Yes	Yes
DICollections	DICollShortNameVIdIdx	No	No	No	No
DICollections	DICollNominalCoverageldx	No	No	No	No
DICompressionAlgorithms	DICompAlgorithmsPkContr	Yes	No	Yes	Yes
DIconfig	DIconfigPkConstr	Yes	No	Yes	Yes
DIDimensionDayNight	DIDimensionDayNightPkConstr	Yes	No	Yes	Yes
DIDimensionGroupESDT	DIDimensionGroupESDTPkConstr	Yes	No	Yes	Yes
DIDimensionGroupESDT	DIDimensionGrpESDTgrpValueldx	No	No	No	No
DIDimensionMP	DIDimensionMPPkConstr	Yes	No	Yes	Yes
DIDimensionMP	DIDimensionMPqaKeyqaValldx	No	No	No	No
DIDimensionMP	DIDimensionMPqaValldx	No	No	No	No
DIDimensionMPScienceQA Xref	DIDimMPScienceQAXrefPkConstr	Yes	No	Yes	Yes
DIDimensionMPScienceQA Xref	DIDimMPSCQAXrefqaNameKeyldx	No	No	No	No
DIDimensionPolygonXref	DIDimensionPolygonXrefPkConstr	No	No	Yes	No
DIDimensionScienceQA	DIDimensionScienceQAPkConstr	Yes	No	Yes	Yes
DIDimensionSpatialT6All	DIDimensionSpatialldx	No	No	No	Yes
DIDimensionSpatialT6All	DIDimensionSpatialT6PkConstr	Yes	No	Yes	No
DIDimensionTemporal	DIDimensionTemporalPkConstr	Yes	No	Yes	Yes
DIDimensionTemporal	DIDimensionTemporalTypeIdx	No	No	No	No
DIDimensionTimeOfDay	DIDimensionTimeOfDayPKConstr	Yes	No	Yes	Yes
DIESDTCurrentDensityMap	DIESDTCurrDensityMapPkConstr	Yes	No	Yes	Yes

**Table 4-2. Index List (3 of 5)**

Table Code	Index Code	PK	FK	U	C
DIESDTCurrentDensityMap	tDIESDTCurrentDensityMap	No	No	No	No
DIDPCVHistory	pk_dpcvhistory	Yes	No	Yes	Yes
DIECSIdsToInsert	DIECSIdsToInsertPkConstr	Yes	No	Yes	Yes
DIESDTCurrentDensityMap	DIESDTCurrDensityMapPkConstr	Yes	No	Yes	Yes
DIFactDayNight	DIFactDayNightPkConstr	Yes	No	Yes	Yes
DIFactDayNight	DIFactDayNightIdx	No	No	No	No
DIFactGroupESDT	DIFactGroupESDTPkConstr	Yes	No	Yes	Yes
DIFactGroupESDT	DIFactGroupESDTIdx	No	No	No	No
DIFactQA	DIFactQAPKConstr	Yes	No	Yes	Yes
DIFactQA	DIFactQAIdx	No	No	No	No
DIFactTemporalRange	DIFactTemporalRangePkConstr	Yes	Yes	Yes	Yes
DIFactTemporalRange	DIFactTemporalRangeCollMXDK	No	No	No	No
DIFactTemporalRange	DIFactTemporalRangeCollMXWK	No	No	No	No
DIFactTemporalRange	DIFactTemporalRangeCollMXMK	No	No	No	No
DIFactTemporalRange	DIFactTemporalRangeCollMYK	No	No	No	No
DIFactTemporalRange	DIFactTemporalRangeCollSize	No	No	No	No
DIFactTemporalRange	idx_temporalarangecollidgranid	No	No	No	No
DIFactTimeOfDay	DIFactTimeOfDayPkConstr	Yes	No	Yes	No
DIFactTimeOfDay	DIFactTimeOfDayIdx	No	No	No	No
DIFile	DIFileDirectoryPathIdx	No	No	No	No
DIFile	DIFilePkConstr	Yes	No	Yes	Yes
DIFile	DIFileGranuleIdIdx	No	Yes	No	No
DIFileSystems	DIFileSystemsPkContr	Yes	No	Yes	Yes
DIFileSystems	DIFileSystemsFileSystemIdIdx	No	No	No	No
DIFilesToBeDeleted	DIFilesToBeDeletedBrowseIdIdx	No	No	No	No
DIFilesToBeDeleted	DIFilesToBeDeletedGranuleIdIdx	No	No	No	No
DIFtpAccessLog	DIFtpAccessLogIdx	No	No	No	Yes
DIGPolygon	xDIGPolygon	No	No	No	Yes
DIGPolygon	DIGPolygonPk	Yes	Yes	Yes	No
DIGrCloudCover	DICoudCoverPkConstr	Yes	Yes	Yes	Yes
DIGranuleAccess	DIGranuleAccessdbldIdx	No	No	No	No
DIGranuleAccess	DIGranuleAccessAccTimeIdx	No	No	No	No
DIGranuleBrowseXref	DIGranuleBrowseXrefBrowseIdIdx	No	No	No	No
DIGranuleBrowseXref	DIGranuleBrowseXrefPkConstr	Yes	Yes	Yes	Yes
DIGranuleExpirationPriority	DIGranExpirPriorityPkConstr	Yes	Yes	Yes	Yes
DIGranuleHdfObjectsXref	DIGranHdfObjXrefGldObjIdIdx	No	Yes	No	No
DIGranuleSubscription	DIGranuleSubPkConstr	Yes	No	Yes	Yes
DIGranuleThemeXref	DIGranuleThemeXrefPkConstr	Yes	Yes	Yes	Yes
DIGranuleThemeXref	idx_granthemexrefcollidthemeid	No	No	No	No
DIGranuleTiles	DIGranuleTilesCollInsTimeIdx	No	No	No	Yes

**Table 4-2. Index List (4 of 5)**

Table Code	Index Code	PK	FK	U	C
DIGranuleTiles	DIGranuleTilesPkConstr	Yes	Yes	Yes	No
DIGranules	DIGranulePkConstr	Yes	No	Yes	Yes
DIGranules	DIGranulesEcsIdIdx	No	No	No	No
DIGranules	DIGranulesExternalIdIdx	No	No	No	No
DIGranules	DIGranulesCollIdIsOSizIdx	No	No	No	No
DIGranules	DIGranulesInsTimeIdx	No	No	No	No
DIGranules	DIGranulesSNVIdIdx	No	No	No	No
DIGranules	idx_dlgranulescolidgranid	No	No	No	No
DIGranuleOWS	DIGranuleOWSPkConstr	Yes	No	Yes	Yes
DIGranuleOWS	DIGranuleOWSStateUpdIdx	No	No	No	No
DIHEGExceptionCollXref	DIHEGExceptionCollXrefPkConstr	Yes	No	Yes	Yes
DIHEGExceptions	DIHEGExceptionsPkConstr	Yes	Yes	Yes	Yes
DIHEGLookup	DIHEGLookupPkConstr	Yes	No	Yes	Yes
DIHEGOptionCollXref	DIHEGOptionCollXrefPkConstr	Yes	No	Yes	Yes
DIHEGOptionLabel	DIHEGOptionLabelPkConstr	Yes	No	Yes	Yes
DIHEGOptions	DIHEGOptionsPkConstr	Yes	Yes	Yes	Yes
DIHdf4thDimensions	DIHdf4thDimensionsPkConstr	Yes	No	Yes	Yes
DIHdfBands	DIHdfBandsPkConstr	Yes	No	Yes	Yes
DIHdfFields	DIHdfFieldsPkConstr	Yes	No	Yes	Yes
DIHdfObjects	DIHdfObjectsPkConstr	Yes	No	Yes	Yes
DIIdentifier	DIIdentifierPkConstr	Yes	No	Yes	Yes
DIInsertActionQueue	DIInsertActionQueuePkConstr	Yes	No	Yes	Yes
DIInsertActionQueue	DIIAQecsIdIdx	No	No	No	No
DIInsertActionQueue	DIIAQxmIFileNameIdx	No	No	No	No
DIInsertActionQueue	DIInsertActionQueuePkConstr	Yes	No	Yes	Yes
DIInsertActionQueue	DIIAQprocessStateIdx	No	No	No	No
DIInsertActionQueue	DIIAQblblAsrcPstalIdx	No	No	No	No
DIMeasuredParameter	DIMeasuredParameterPkConstr	Yes	Yes	Yes	Yes
DINOSELookup	DINOSELookupPkConstr	Yes	No	Yes	Yes
DIOMSGranules	DIOMSGranulesPkConstr	Yes	No	Yes	Yes
DIOMSGranules	DIOMSGranGranIdIdx	No	No	No	No
DIOMSGranules	DIOMSGranLockIdIdx	No	No	No	No
DIOrbitCalculatedSpatial	DIOrbitCalSpatialPk	Yes	No	Yes	Yes
DIOrbitCalculatedSpatial	DIOrbitCalSpatialGranuleIdx	No	No	No	No
DIOrbitPolygons	xDIOrbitPolygons	No	No	No	Yes
DIOrbitPolygons	DIOrbitPolygonsPkConstr	Yes	No	Yes	No
DIOWSDeletedGranules	DIOWSDeletedGranulesPkConstr	Yes	No	Yes	Yes
DIOWSDeletedGranules	DIOWSDeletedGranulesExpDateIdx	No	No	No	No
DIPlatInstrCode	DIPlatInstrCodePkConstr	Yes	No	Yes	Yes
DIProcAttributes	PK_PROCATTRIBUTES	Yes	No	Yes	Yes
DIPrivateCollection	DIPrivateCollectionPkConstr	Yes	No	Yes	Yes

**Table 4-2. Index List (5 of 5)**

Table Code	Index Code	PK	FK	U	C
DIRestoreOlaFilesFromTape	pk_restoreolafromtape	Yes	No	Yes	Yes
DIRestoreOlaFilesFromTape	xRestoreOlaDplFile	No	No	No	No
DIRestoreOlaFilesFromTape	xRestoreOlaMediaId	No	No	No	No
DIRestoreOlaFilesFromTape	xRestoreOlaRequestId	No	No	No	No
DIRestoreOlaLock	pk_restoreolalock	Yes	No	Yes	Yes
DIRestoreRequests	pk_restorererequest	Yes	No	Yes	Yes
DIRestoreTapeFilesFromOla	pk_restoretapefromola	Yes	No	Yes	Yes
DIRestoreTapeFilesFromOla	xRestoreTapeDplFile	No	No	No	No
DIRestoreTapeFilesFromOla	xRestoreTapeRequestId	No	No	No	No
DIQAUpdFlagTemp	DIQAUpdFlagTempGranParmIdx	No	No	No	No
DIQAUpdTempBcp	DIQAUpdTempBcpEcsIdx	No	No	No	No
DIRecoveryParameters	DIRecoveryParametersPkConstr	Yes	No	Yes	Yes
DIStatTheme	idx_dlstatthemethemeid	No	No	No	No
DI TempGrans	DI TempGransPkConstr	Yes	No	Yes	Yes
DI TempPhantoms	DI TempPhantomsDirFileNameIdx	No	No	No	No
DI Themes	DI ThemePkConstr	Yes	No	Yes	Yes
DI Themes	DI ThemesNameIdx	No	No	No	No
DI Themes	DI ThemesConvSvcIdx	No	No	No	No
DI UpdGranulesTemp	DI UpdGransTempGranIdx	No	No	No	No
DI WebAccessLog	DI WebAccessLogIdx	No	No	No	Yes
DI XMLFilesToInsert	DI XMLFilesToInsertPkConstr	Yes	No	Yes	Yes

## 4.2 Segments

Sybase supports the declaration of segments. A segment is a named pointer to a storage device(s). Segments are used to physically allocate a database object to a particular storage device. Segments defined for the Data Pool and all other subsystem databases are described in Table 4-3.

**Table 4-3. Segment Descriptions**

<b>Segment Name Segment</b>	<b>Description</b>
Default	Default data segment used if no other segment specified in the create statement.
Logsegment	SYSLOGS, Transaction Logs
Systemsegment	System tables and indexes

### **4.3 Caches**

A cache is a block of memory that is used by Sybase to retain and manage pages that are currently being processed. By default, each database contains three caches:

Data cache – retains most recently accessed data and index pages

Procedure cache – retains most recently accessed stored procedure pages

User transaction log cache – transaction log pages that have not yet been written to disk for each user

The size of each of these default caches is a configurable item which is must be managed on a per DAAC basis. These caches may be increased or decreased by the DAAC DBA as needed.


The data cache can be further subdivided into named caches. A named cache is a block of memory that is named and used by the DBMS to store data pages for select tables and/or indexes. Assigning a database table to named cache causes accessed pages to be loaded into memory and retained. The named cache does not need to be allocated to accommodate the entire database table since the DBMS manages the cache according to use. Named caches greatly increase performance by eliminating the time associated for disk input and output (I/O). There is a named cache (dp\_cache) that is currently defined for the Data Pool Subsystem database. Named caches may be defined as the memory usage of the Data Pool database becomes well known and the DAACs move into an operational environment.

# 5. Database Security

---

## 5.1 Approach

The database security discussed within this section is bounded to security implementation within the Sybase SQL Server DBMS. A Sybase general approach to security is adopted as illustrated in Figure 5-1.

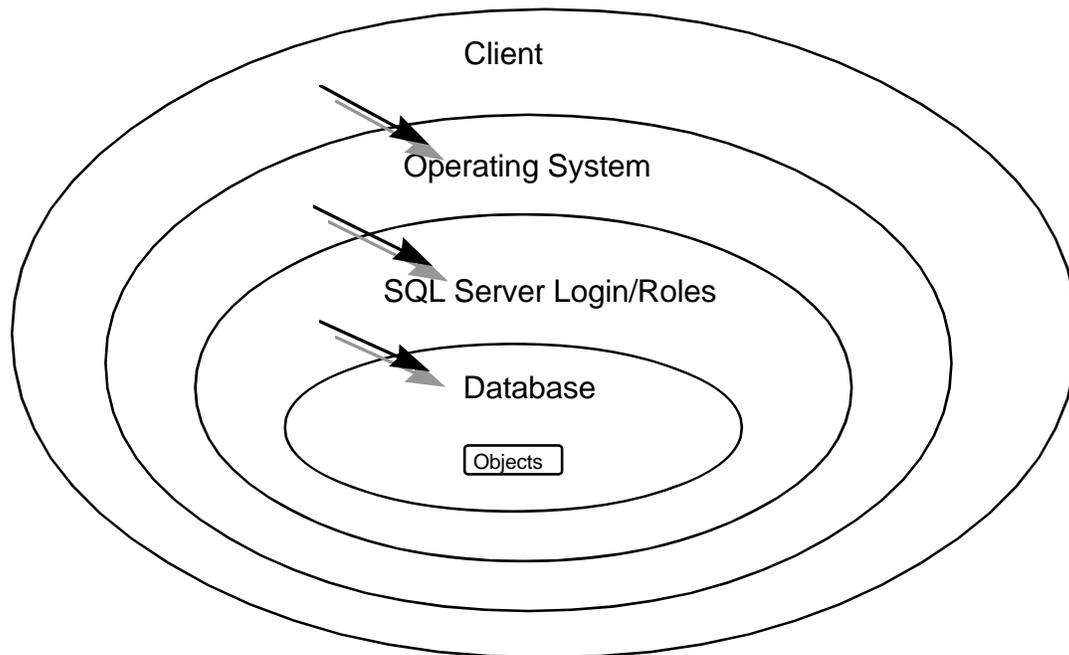

**Figure 5-1. Sybase General Approach to SQL Server Security<sup>1</sup>**

## 5.2 Users

The client (user) requires a SQL Server login to access the DBMS. The login is assigned to a user with certain related permissions for gaining access to particular objects (e.g., database tables, views, commands) within the database. The System Administrator may grant or revoke objects permissions for a login individually or based on defined group or roles.

---

<sup>1</sup> Reference Sybase Student Guide: *Advanced SQL Server Administration*.

## 5.3 Groups

Groups are a means of logically associating users with similar data access needs. Once a group has been defined, object and command permissions can be granted to that group. A user who is member of a group inherits all of the permissions granted to that group. No groups have been initially defined in the Data Pool Subsystem “default database. The DAACs should define database groups to support the database security requirements of their individual DAACs. Assigning each user to the appropriate group should control security for local DAAC users.

## 5.4 Roles

Roles were introduced in Sybase to allow a structured means for granting users the permissions needed to perform standard database administration activities and also provide a means for easily identifying such users. There are six pre-defined roles that may be assigned to a user. A definition of each of these roles follows, as well as a description of the types of activities that may be performed by each role.

**System Administrator** (*sa\_role*): This role is used to grant a specific user permissions needed to perform standard system administrator duties including:

- installing SQL server and specific SQL server modules
- managing the allocation of physical storage
- tuning configuration parameters
- creating databases

**Site Security Officer** (*sso\_role*): This role is used to grant a specific user the permissions needed to maintain SQL server security including:

- adding server logins
- administrating passwords
- managing the audit system
- granting users all roles except the *sa\_role*

**Operator** (*oper\_role*): This role is used to grant a specific user the permissions needed to perform standard functions for the database including:

- dumping transactions and databases
- loading transactions and databases

**Navigator** (*navigator\_role*): This role is used to grant a specific user the permissions needed to manage the navigation server.

**Replication** (*replication\_role*): This role is used to grant a specific user the permissions needed to manage the replication server.

**Sybase Technical Support** (*sybase\_ts\_role*): This role is used to grant a specific user the permissions needed to execute *database consistency checker (dbcc)*, a Sybase supplied utility supporting commands that are normally outside of the realm of routine system administrator activities.

The DAACs should review these roles and assign them to the appropriate login and/or groups.

## 5.5 Login/Group Object Permissions

During initial database installation logins used by the ECS custom code were created and permissions assigned for access to the Data Pool Subsystem database. In addition, special database installation login, *dpl\_role*, was created to support database installation needs. For each login, the level of access is limited to that associated with their login, group or assigned group/role. Object Permissions are set within the installation scripts of the Data Pool Subsystem for each object and group/role.

Permissions are identified in Table 5-1. A specification of the object permissions is contained in Table 5-2.

**Table 5-1. Permission Key**

Permission	Description
A	All
S	Select
I	Insert
U	Update
D	Delete
E	Execute

**Table 5-2. Object Permissions (1 of 6)**

Group Name	Group Users	Delete	Insert	Select	Update	Execute	Object Name
EMSgroup	EcDbE MSdat aExtra ctor			X			DistFTP
EMSgroup	EcDbE MSdat aExtra ctor			X			DIGranuleAccess

**Table 5-2. Object Permissions (2 of 6)**

Group Name	Group Users	Delete	Insert	Select	Update	Execute	Object Name
datapool	All		X	X	X		DIAccessRollup
datapool	All		X	X	X		DIActiveInsertProcesses
datapool	All		X	X	X		DIAGingConfig
datapool	All	X	X	X	X		DIBatchBrowseToDelete
datapool	All	X	X	X	X		DIBatchGransToDelete
datapool	All	X	X	X	X		DIBcpGransToDelete
datapool	All	X	X	X	X		DIBmgtEvents
datapool	All	X	X	X	X		DIBoundingRectangle
datapool	All		X	X	X		DIBrowse
datapool	All		X	X	X		DIBrowseFile
datapool	All	X	X	X			DIBulkWrkTable
datapool	All		X	X	X		DIOrder
datapool	All		X	X	X		DIOrderItem
datapool	All		X	X	X		DIOrderItemBand
datapool	All		X	X	X		DICloudCoverSource
datapool	All		X	X	X		DICollectionGroup
datapool	All		X	X	X		DICollections
datapool	All		X	X	X		DICompressionAlgorithms
datapool	All		X	X	X		DIConfig
datapool	All	X	X	X	X		DIDPCVHistory
datapool	All		X	X	X		DIDimensionDayNight
datapool	All		X	X	X		DIDimensionGroupESDT
datapool	All		X	X	X		DIDimensionMP
datapool	All		X	X	X		DIDimensionMPScienceQAXref
datapool	All	X	X	X	X		DIDimensionPolygonXref
datapool	All		X	X	X		DIDimensionScienceQA
datapool	All	X	X	X	X		DIDimensionSpatialT6All
datapool	All		X	X	X		DIDimensionTemporal
datapool	All		X	X	X		DIDimensionTimeOfDay
datapool	All		X	X	X		DIECSIdsToInsert
datapool	All	X	X	X	X		DIESDTCurrentDensityMap
datapool	All	X	X	X	X		DIFactDayNight
datapool	All	X	X	X	X		DIFactGroupESDT
datapool	All	X	X	X	X		DIFactQA
datapool	All		X	X	X		DIFactTemporalRange
datapool	All	X	X	X	X		DIFactTimeOfDay
datapool	All	X	X	X	X		DIFile
datapool	All		X	X	X		DIFileSystems

**Table 5-2. Object Permissions (3 of 6)**

Group Name	Group Users	Delete	Insert	Select	Update	Execute	Object Name
datapool	All		X	X	X		DIFilesToBeDeleted
datapool	All		X	X	X		DIftpAccessLog
datapool	All	X	X	X	X		DIGPolygon
datapool	All		X	X	X		DIGrCloudCover
datapool	All		X	X	X		DIGranuleAccess
datapool	All		X	X	X		DIGranuleBrowseXref
datapool	All		X	X	X		DIGranuleExpirationPriority
datapool	All		X	X	X		DIGranuleHdfObjectsXref
datapool	All	X	X	X	X		DIGranuleOWS
datapool	All		X	X	X		DIGranuleSubscription
datapool	All	X	X	X	X		DIGranuleThemeXref
datapool	All	X	X	X	X		DIGranuleTiles
datapool	All		X	X	X		DIGranules
datapool	All		X	X	X		DIHEGExceptionCollXref
datapool	All		X	X	X		DIHEGExceptions
datapool	All		X	X	X		DIHEGLookup
datapool	All		X	X	X		DIHEGOptionCollXref
datapool	All		X	X	X		DIHEGOptionLabel
datapool	All		X	X	X		DIHEGOptions
datapool	All		X	X	X		DIHdf4thDimensions
datapool	All		X	X	X		DIHdfBands
datapool	All	X	X	X	X		DIHdfFields
datapool	All		X	X	X		DIHdfObjects
datapool	All		X	X	X		DIIdentifier
datapool	All		X	X	X		DIInsertActionQueue
datapool	All	X	X	X	X		DILogicalLock
datapool	All		X	X	X		DINOSELookup
datapool	All		X	X	X		DIOMSGranules
datapool	All	X	X	X	X		DIOWSDeletedGranules
datapool	All		X	X	X		DIOrbitCalculatedSpatial
datapool	All	X	X	X	X		DIOrbitPolygons
datapool	All	X	X	X	X		DIPendingDelete
datapool	All		X	X	X		DIPlatInstrCode
datapool	All		X	X	X		DIProcAttributes
datapool	All	X	X	X	X		DIQAUpdFlagTemp
datapool	All		X	X	X		DIRecoveryParameters
datapool	All	X	X	X	X		DIRestoreOlaFilesFromTape
datapool	All		X	X	X		DIRestoreOlaLock
datapool	All	X	X	X	X		DIRestoreRequests

**Table 5-2. Object Permissions (4 of 6)**

Group Name	Group Users	Delete	Insert	Select	Update	Execute	Object Name
datapool	All	X	X	X	X		DIRestoreTapeFilesFromOla
datapool	All	X	X	X	X		DIStatESDT
datapool	All	X	X	X	X		DIStatGroupESDT
datapool	All	X	X	X	X		DIStatTheme
datapool	All		X	X	X		DITempGrans
datapool	All		X	X	X		DITempPhantoms
datapool	All	X	X	X	X		DIThemes
datapool	All	X	X	X	X		DIUpdGranulesTemp
datapool	All	X	X	X	X		DIVolumeGroup
datapool	All		X	X	X		DIWebAccessLog
datapool	All		X	X	X		DIXMLFilesToInsert
datapool	All		X	X	X		EcDbDatabaseVersions
datapool	All					X	all stored procedures
nbgroup	All					X	ProcThemeEnabledForInsert
nbgroup	All					X	ProcGetUniqueldOutput
nbgroup	All					X	ProcMakeThemeRetroactive
nbgroup	All		X				DIInsertActionQuerue
nbgroup	All			X			DIAccessRollup
nbgroup	All			X			DIActiveInsertProcesses
nbgroup	All			X			DIBoundingRectangle
nbgroup	All			X			DIBrowse
nbgroup	All			X			DIBrowseFile
nbgroup	All			X			DIOrder
nbgroup	All			X			DIOrderItem
nbgroup	All			X			DIOrderItemBand
nbgroup	All			X			DICloudCoverSource
nbgroup	All			X			DICollectionGroup
nbgroup	All			X			DICollections
nbgroup	All			X			DICompressionAlgorithms
nbgroup	All			X			DIConfig
nbgroup	All			X			DIDimensionDayNight
nbgroup	All			X			DIDimensionGroupESDT
nbgroup	All			X			DIDimensionMP
nbgroup	All			X			DIDimensionMPScienceQAXref
nbgroup	All			X			DIDimensionPolygonXref
nbgroup	All			X			DIDimensionScienceQA
nbgroup	All			X			DIDimensionSpatialT6All
nbgroup	All			X			DIDimensionTemporal

**Table 5-2. Object Permissions (5 of 6)**

Group Name	Group Users	Delete	Insert	Select	Update	Execute	Object Name
nbggroup	All			X			DI DimensionTimeOfDay
nbggroup	All			X			DI ESDTCurrentDensityMap
nbggroup	All			X			DI FactDayNight
nbggroup	All			X			DI FactGroupESDT
nbggroup	All			X			DI FactQA
nbggroup	All			X			DI FactTemporalRange
nbggroup	All			X			DI FactTimeOfDay
nbggroup	All			X			DI File
nbggroup	All			X			DI FileSystems
nbggroup	All			X			DI FilesToBeDeleted
nbggroup	All			X			DI FtpAccessLog
nbggroup	All			X			DI GPolygon
nbggroup	All			X			DI GrCloudCover
nbggroup	All			X			DI GranuleAccess
nbggroup	All			X			DI GranuleBrowseXref
nbggroup	All			X			DI GranuleExpirationPriority
nbggroup	All			X			DI GranuleHdfObjectsXref
nbggroup	All			X			DI GranuleSubscription
nbggroup	All			X			DI GranuleTiles
nbggroup	All			X			DI Granules
nbggroup	All			X			DI HEGLookup
nbggroup	All			X			DI Hdf4thDimensions
nbggroup	All			X			DI HdfBands
nbggroup	All			X			DI HdfObjects
nbggroup	All			X			DI Identifier
nbggroup	All			X			DI InsertActionQueue
nbggroup	All			X			DI InsertActionQueue
nbggroup	All			X			DI MeasuredParameter
nbggroup	All			X			DI NOSELookup
nbggroup	All			X			DI OMSGranules
nbggroup	All			X			DI OrbitCalculatedSpatial
nbggroup	All			X			DI OrbitPolygons
nbggroup	All			X			DI PlatInstrCode
nbggroup	All			X			DI ProcAttributes
nbggroup	All			X			DI QAUpdFlagTemp
nbggroup	All			X			DI RecoveryParameters
nbggroup	All			X			DI Themes
nbggroup	All			X			DI UpdGranulesTemp
nbggroup	All			X			DI WebAccessLog

**Table 5-2. Object Permissions (6 of 6)**

<b>Group Name</b>	<b>Group Users</b>	<b>Delete</b>	<b>Insert</b>	<b>Select</b>	<b>Update</b>	<b>Execute</b>	<b>Object Name</b>
nbggroup	All			X			DIXMLFilesToInsert
nbggroup	All			X			EcDbDatabaseVersions

# 6. Scripts

---

## 6.1 Installation Scripts

Scripts used to support installation of the Data Pool Subsystem database are listed in Table 6-1.

**Table 6-1. Installation Scripts**

Script File	Description
EcDIDbBuild	Script used to build the DPL database from scratch.

## 6.2 De-Installation Scripts

Scripts used to support de-installation of the Data Pool Subsystem database are listed in Table 6-2.

**Table 6-2. De-Installation Scripts**

Script File	Description
DIDbDropSchema	Script used to delete all schema and data from database.

## 6.3 Backup and Recovery Scripts

Scripts developed to perform backup and recovery of the Data Pool Subsystem database are listed in Table 6-3. These scripts should be configured to run automatically using the Unix cron facility. It is recommended that, transaction logs dumps (incremental dumps) are performed a minimum of 3 times each day. It is recommended that database dumps (full database dumps) are performed a minimum of once each day. Backup and recovery are M&O activities. At their discretion, DAACs may modify these backup/recovery scripts or utilize backup/recovery scripts developed by their local M&O staff.

**Table 6-3. Backup and Recovery Scripts**

Script File	Description
EcCoDbSyb_DumpDb	Dumps all databases for managed by the SQL server instance.
EcCoDbSyb_DumpTran	Dumps the transaction log for all databases managed by the SQL server.

## 6.4 Miscellaneous Scripts

Miscellaneous scripts applicable to the Data Pool Subsystem database are shown in Table 6-4.

**Table 6-4. Miscellaneous Scripts and Input Data Files**

<b>Script</b>	<b>Description</b>
EcDdmMonitorServer	Monitors segment usage and user levels for a selected SQL server. Superseded by DbVision COTS.
EcDdmSegmentUse	Monitors segment usage. Used by EcDdmMonitorServer. Superseded by DbVision COTS.
EcDdmUserCounts	Monitors user access. Used by EcDdmMonitorServer. Superseded by DbVision COTS.
EcCoDbSyb_CkErrorLog	Checks the error log for error messages warranting DBO attention. Superseded by DbVision.
EcCoDbSyb_DbStat	Updates index statistics for each table in the selected database.
EcCoDbSyb_DboMail	Emails DBA error notification via e-mail. Used by EcCoDbSyb_DumpDb/Tran and EcCoDbSyb_CkErrorLog scripts.



These tables are permanent tables that are used like temp tables by DataPool utilities. They get cleaned up after processing is finished.

These tables are used to gather statistics about Data Pool access.

These tables relate to HEG subsetting.

DIFtpAccessLog		
directoryPath	varchar(255)	not null
fileName	varchar(255)	not null
accessTime	datetime	not null
fileSize	numeric(16,0)	not null
transferTime	int	null
specialActionFlag	char(2)	null
ipAddress	char(15)	not null
domainName	varchar(255)	null

DIWebAccessLog		
directoryPath	varchar(255)	not null
fileName	varchar(255)	not null
accessTime	datetime	not null
ipAddress	char(15)	not null
domainName	varchar(255)	null

DIFilesToBeDeleted		
granuleId	ID	null
browseId	ID	null
fileName	varchar(255)	not null
fileSize	numeric(16,0)	not null
directoryPath	varchar(255)	null
state	tinyint	not null
ecslId	ID	null
ShortName	char(8)	null
VersionId	tinyint	null

DIBopGransToDelete		
granuleId	ID	<pk> not null

DIBatchGransToDelete		
granuleId	ID	<pk> not null
status	char(1)	null

DIBatchBrowseToDelete		
browseId	ID	<pk> not null
status	char(1)	null

DITempGrans		
granuleId	ID	<pk> not null

DITempPhantoms		
directoryPath	varchar(255)	not null
fileName	varchar(255)	not null

DIUpdGranulesTemp		
granuleId	ID	not null
ExpirationDate	datetime	not null
RetentionPriority	int	null

DIRecoveryParameters		
utilityName	varchar(40)	<pk> not null
parameterName	varchar(50)	<pk> not null
parameterValue	varchar(255)	not null

DIECSidsToInsert		
processId	int	<pk> not null
ecslId	ID	<pk> not null

DIXMLFilesToInsert		
processId	int	<pk> not null
xmlFileName	varchar(255)	<pk> not null
ShortName	char(8)	null
VersionId	tinyint	null

DIBulkWkTable		
clientId	ID	not null
granuleId	ID	not null

DIHEGExceptionCollXref		
collectionId	ID	<pk> not null
exceptionId	int	<pk,fk> not null

exceptionId = exceptionId

DIHEGExceptions		
exceptionId	int	<pk> not null
formatId	int	null
projectionId	int	null
subsetId	int	null
resamplingId	int	null
subsamplingId	int	null
stitchingId	int	null
resolutionId	int	null
exceptionType	char(1)	null
message	varchar(255)	null

DIHEGOptionCollXref		
collectionId	ID	<pk> not null
optionId	int	<pk,fk> not null
required	char(1)	not null

optionId = optionId

DIHEGOptions		
optionId	int	<pk> not null
optionType	varchar(20)	not null
optionName	varchar(80)	not null

optionId = optionId

DIHEGOptionLabel		
optionId	int	<pk,fk> not null
labelName	varchar(80)	not null

DIAGingConfig			
AgingConfigId	identity	<pk>	not null
MaxPriLevel	float		null
agingStep	float		null
ECSPriority	char(15)		null
IntPriority	tinyint		null

DIGranuleAccess		
dbId	ID	not null
ecslId	ID	null
accessType	varchar(10)	not null
age	int	not null
fileName	varchar(255)	null
fileSize	numeric(16,0)	not null
fileType	varchar(10)	null
accessTime	datetime	not null
transferTime	int	null
specialActionFlag	char(2)	null
ipAddress	char(15)	not null
domainName	varchar(255)	null

DIConfig			
parameterName	varchar(50)	<pk>	not null
parameterDescription	varchar(255)		null
parameterType	char(1)		not null
intValue	int		null
charValue	varchar(255)		null
floatValue	float		null

DIProcAttributes			
procName	varchar(30)	<pk>	not null
attributeName	varchar(30)	<pk>	not null
charValue	varchar(255)		null
intValue	int		null
floatValue	float		null

DIAccessRollup			
rollupBeginningDateTime	datetime	<pk>	not null
rollupEndingDateTime	datetime	<pk>	not null
accessType	varchar(10)	<pk>	not null

DIDPCVHistory		
runId	numeric(16)	identity
processId	int	<pk> not null
hostName	varchar(20)	<pk> not null
inputParameter	varchar(255)	not null
startTime	datetime	not null
endTime	datetime	null
numFilesChecksummed	numeric(16)	not null
numFilesChecksumFailed	numeric(16)	not null
numFilesChecksumMismatch	numeric(16)	not null
lastUpdate	datetime	not null
status	varchar(255)	not null

Valid values for status:  
PROCESSING  
Expired  
Failure  
Success

Figure A-2. Data Pool Inventory (2 of 2)

# Abbreviations and Acronyms

---

ADSRV	Advertising Service CSCI
AIM	Archive Inventory Management
ANSI	American National Standards Institute
ASC	Ascending
BCP	Bulk Copy Utility
BMGT	Bulk Metadata Generation Tool
CASE	Computer Aided Software Engineering
CD	contractual delivery 214-001
CDRL	contract data requirements list
CDS	cell directory service
CI	configuration item
CONFIG	Configuration Registry Subsystem
COTS	commercial off-the-shelf (hardware or software)
CSCI	computer software configuration item
CSDT	Computer Science Data Type
CSMS	Communications and Systems Management Segment (ECS)
CSS	Communications Subsystem
DAAC	Distributed Active Archive Center
DESC	Descending
DBMS	Database Management System
DCN	Document Change Notice
DDICT	Data Dictionary CSCI
DDIST	Data Distribution Services CSCI
DDN	Data Delivery Notice
DID	data item description
DM	Data Management
DMS	Data Management Subsystem
DP	Data Provider

DPAD	Data Pool Action Driver
DPIU	Data Pool Insert Utility
DPL	Data Pool Subsystem
DPS	Data Processing Subsystem
DSS	Data Server Subsystem
ECS	EOSDIS Core System
EDC	EROS Data Center
EDHS	ECS Data Handling System
EDOS	EOS Data and Operations System
EOS	Earth Observing System
EOSDIS	Earth Observing System Data and Information System
ERD	Entity Relationship Diagram
EROS	Earth Resources Observation System
ESDIS	Earth Science Data and Information System (GSFC)
ESDT	Earth science data types
FK	Foreign Key
FTP	File Transfer Protocol
GIS	Geographic Information System
GSFC	Goddard Space Flight Center
GUI	graphic user interface
HTML	Hypertext Markup Language
HTTP	Hypertext Transport Protocol
HWCI	Hardware Configuration Item
ICD	interface control document
ID	identification
INGEST	Ingest Services CSCI
IOS	Interoperability Subsystem
IP	Internet Protocol
ISS	Internetworking Subsystem
IV&V	independent verification and validation
LaRC	Langley Research Center (DAAC)
MCF	Metadata Configuration File

MSFC	Marshall Space Flight Center
MSS	Management Support Subsystem
OGC	Open Geospatial Consortium
OLA	Online Archive
OWS	OGC Web Services
PDF	Portable Document Format
PDPS	Planning and Data Processing Subsystem
PK	Primary Key
PLANG	Production Planning CSCI
PLS	Planning Subsystem
RDBMS	Relational Data Base Management System
RPC	Remote Procedure Call
URL	Universal Reference Locator
WWW	World-Wide Web

This page intentionally left blank.